

DMZL

Professional Compressor Manufacturer

专业制冷压缩机制造商



打造民族品牌 创建百年企业

品质为本，

创新为魂，

大明制冷秉承质量至上的理念，

致力于为世界制造更优、更好的压缩机。


Quality-oriented,

Innovation-focused,

Adhering to the idea of quality-first,

We are committed to producing the best compressor.

DMZL

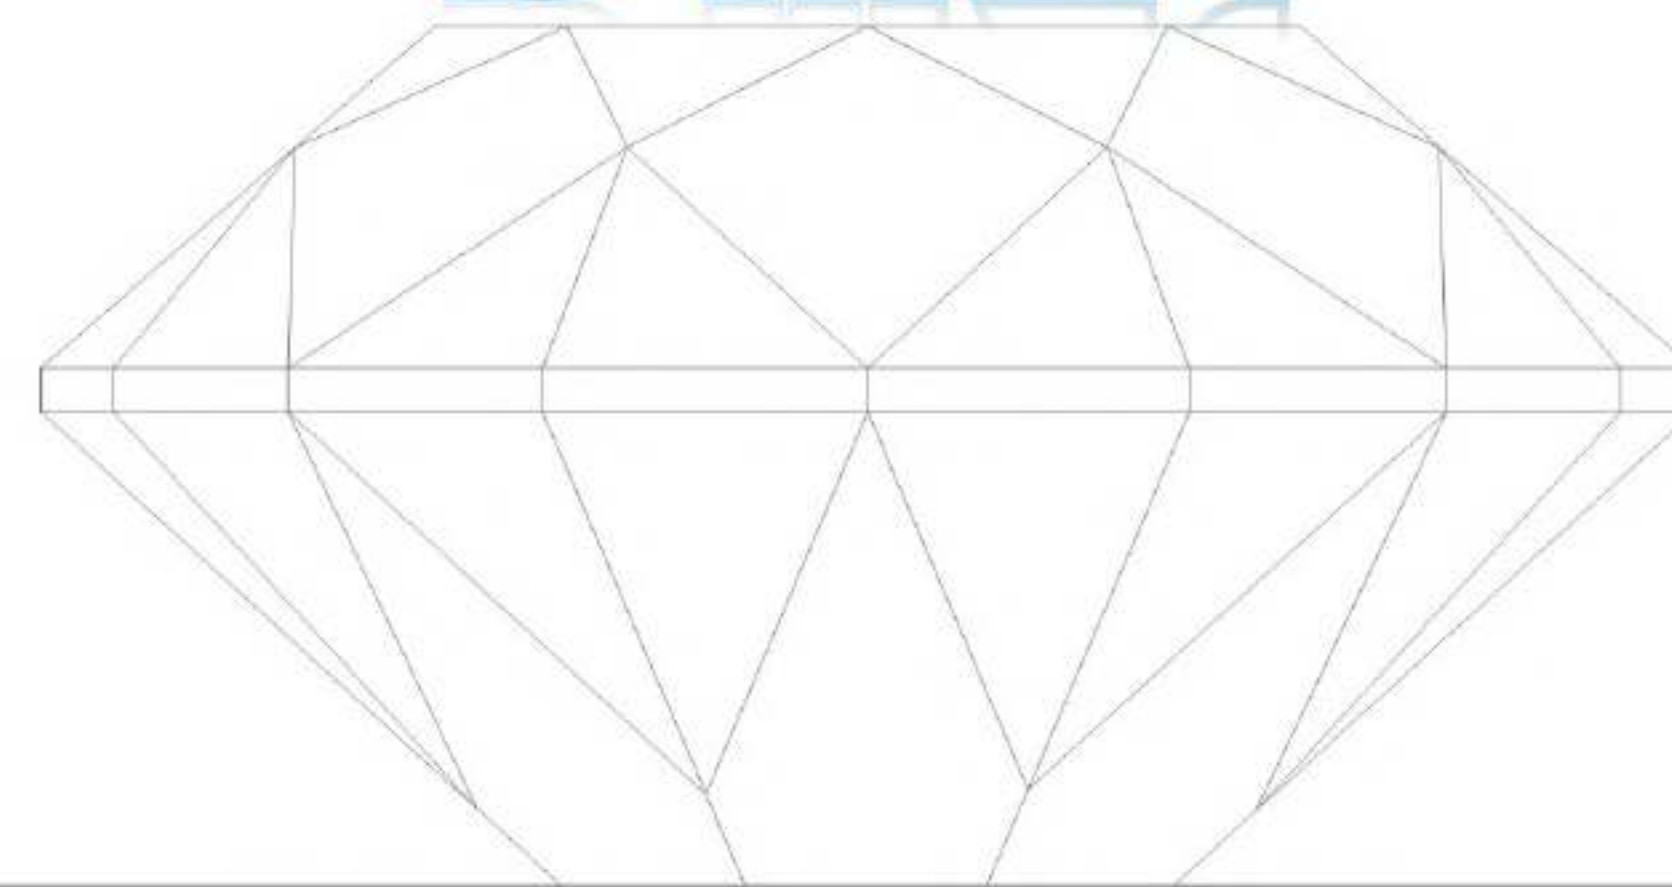

追求卓越，缔造完美
Persuing Excellence, Making Perfection



“静”心发挥，“劲”力表现
Low Vibration, Powerful Capacity



DMZL

大明制冷

DAMING REFRIGERATION

浙江大明制冷科技有限公司，是一家专业从事制冷压缩机和压缩冷凝机组等制冷设备设计、研发、制造和销售的科技型民营企业，旗下拥有半封闭活塞式制冷压缩机品牌“金明”、半封闭涡旋式制冷压缩机品牌“SCROLL”和半封闭螺杆式制冷压缩机品牌“RFC”。

公司建有专业的制冷压缩机生产基地，拥有厂房3万余平米，引进了多种高精尖进口加工设备，建立了现代化的制冷压缩机和压缩冷凝机组装配线，并配备有专业的仓储中心和物流配送中心。

公司拥有三十多年的制冷压缩机制造经验，组建了一支国际国内制冷精英构成的技术团队，技术力量雄厚。公司还聘请专业的管理咨询机构针对性地建立起现代化的高效管理模式，以提升企业的管理水平。

公司以“打造民族品牌、创建百年企业”为目标，遵循“品质为本、创新为魂”的经营理念，以匠心做好产品，以创新求无限生机，努力将“大明制冷”打造成国产压缩机民族品牌、中国一流制冷压缩机制造商。

Zhejiang Daming Refrigeration Technology Co.,Ltd. Is a private company specialized in designing, producing and marketing of refrigeration compressor and condensing unit, including semi-hermetic reciprocating compressor, scroll compressor, screw compressor and air&water cooled condensing unit.

We own a manufacturing base which is over 30,000 square meters, including precise processing workshop with advanced machines and logistic department.

Meanwhile, Daming has a powerful technical team that consists of experienced engineers and technicians. Every single employee make their best effort to ensure perfect products' quality and operation efficiency.

We aim at building "Daming" into a well-known national brand as well as a century enterprise with quality and creation, being a top compressor manufacturer.





生产设备

大明制冷拥有专业的制冷压缩机及冷凝机组生产基地和成熟的生产技术以及精密的制造与测试设备。企业现有厂房三万余平米，拥有现代化的加工车间，其中引进了CNC数控立式加工中心、数控卧式镗床、多孔钻床及超声波清洗机等高精设备，拥有制冷压缩机和冷凝机组自动化生产线，并建立了制冷压缩机性能检测中心，具有完善的加工、生产和检测能力，确保每一件产品的卓越性能。



FACILITIES & EQUIPMENT

Daming have a professional manufacturing base, advanced technology, precise equipment and facilities, our factory covers an area more than 30,000 square meters which including a modernized processing workshop with CNC Process Center, horizontal boring machines, two automatic producing lines of compressor & condensing unit, and a properties testing center. Now Daming have the capability of making complete range compressor and ensuring every product's perfect performance.

HONOR & CERTIFICATES

资质荣誉



DAMING REFRIGERATION

Advanced, Professional
Credible, Steady

力求领先，追求专业，
诚信经营，稳健发展。

创建“大明”品牌，是每个员工孜孜不倦追求的目标和理想，高新技术和高起点的产品结构是实现理想和目标的硬件，严格的管理和“大明制冷”人严谨、细实的工作作风，是完成目标的软件。“大明”是年轻的，更是充满生机和无限希望的，面对激烈的市场竞争，我们将以更优质的产品服务于社会。

To build "Daming" as a famous national brand is the goal diligently pursued by every employee in Daming group. The high technology, perfect product structure and the strict management, meticulous working principle are hardware and software for achieving this goal. More than young, Daming is full of vigour and infinite hope. Facing fierce competition, we will provide more qualified products to the market.



目录

活塞式制冷压缩机 Reciprocating Compressor

1	产品特点 Products Features	11
	型号标识 Nomenclature	12
	应用范围 Application Scope	13
	技术参数 Technical Data	15

2	制冷量表 Performance Data	
	R22	21
	R404A/R507A	27

螺杆式制冷压缩机 Screw Compressor

1	型号标识 Nomenclature	31
	应用范围 Application Scope	32
	技术参数 Technical Data	33

2	制冷量表 Performance Data	
	R22	37
	R404A	45

活塞式制冷压缩机 Reciprocating Compressor



产品特点 Products features

大明制冷压缩机适用于各种工况工质，力求最大限度地满足现您对制冷系统的要求。

The compressors of Daming suit different working condition and refrigerants, try to maximally satisfy your requirements for the refrigerating system.

- 1 技术成熟，结构紧凑 / Developed technology, compact dimension**
体积小，空间要求小 / Small volume and space
- 2 高精度加工，确保压缩机各项指标达标 / High precision machining to ensure the compressor confirm with the standard**
数控加工中心加工壳体 / CNC processing center
特殊工艺保证三孔同心度 / Concentricity due to specific processing technology
最小的死点间隙 / minimal dead space
- 3 运行平稳，震动小，噪音低 / steady operation, small vibration and low noise**
绝佳的稳定性 / Excellent stability
- 4 使用R22、R404等工质，符合国际环保要求 / Refrigerant like R22 and R404 are adopted to protect the environment**
适用于低温、中高温等各种工况 / For mid & low temperature application
- 5 电子保护装置，有效保护电机 / Electrical motor protect device**
PTC温度监控装置 / PTC sensor
- 6 耐磨的驱动件，使用寿命长 / wear resistant driver gear**
镀铬的活塞环，铝制活塞 / Chrome plated piston rings and aluminium pistons
硬化处理过的曲轴 / Hardened crank-shaft
低摩擦轴套 / Less friction
- 7 高效阀板组设计，制冷量大，能耗低 / Efficient valve plate design, high refrigerating capacity and low energy consumption**
高效的吸排气压缩比率 / Efficient compression rate
阀片为瑞典进口钢带锻造，耐冲击 / Valve reed made of imported impact resistant spring steel
- 8 零部件通用程度高，拆修维护方便 / General spare parts, convenient for maintenance.**

型号标识 Nomenclature

BFS31—BFS151

BF 半封闭
Semi-hermetic

S 型号
Model

3 匹数
Horse-power

1 设计系列编号
Series code

4S151D—6S501G

4/6 缸数
Cylinders

S 型号
Model

15 匹数
Horse-power

1 设计系列编号
Series code

D/G D指低温，G指中高温
D for low condensing temperature,
G for mid & high condensing temperature

2YD-2.2—6WG-50.2

2/4/6 缸数
Cylinders

Y/VW 指机型
Type

D/G D指低温，G指中高温
D for low condensing temperature,
G for mid & high condensing temperature

2 匹数
Horse-power

2 设计系列编号
Series code

6WDS-20.2—6WDS-30.2

6 缸数
Cylinders

W 指机型
Type

DS 双级压缩
Double Stage


20 匹数
Horse-power

2 设计系列编号
Series code


应用范围
基于吸气温度20°C

Application Scope
Suction gas temperature 20°C


R404A•R507A
2YD-2.2—4YG-9.2

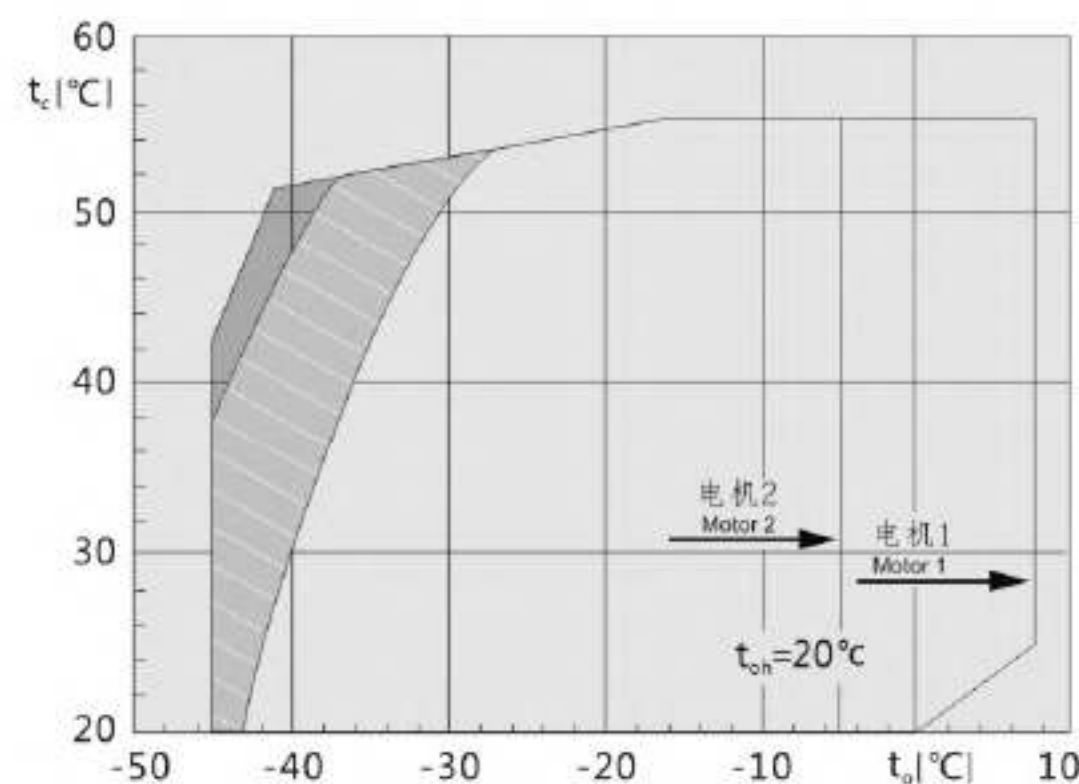


R404A•R507A
4YD-8.2—6WG-50.2
4S151D—6S501G

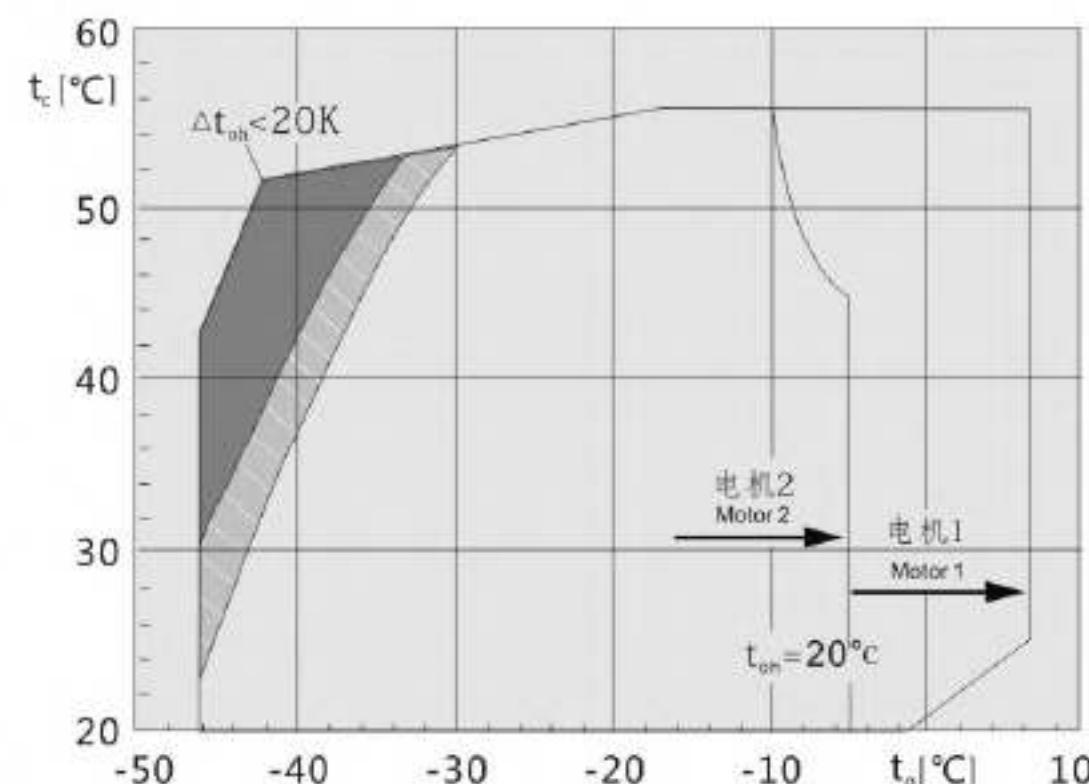

R134a

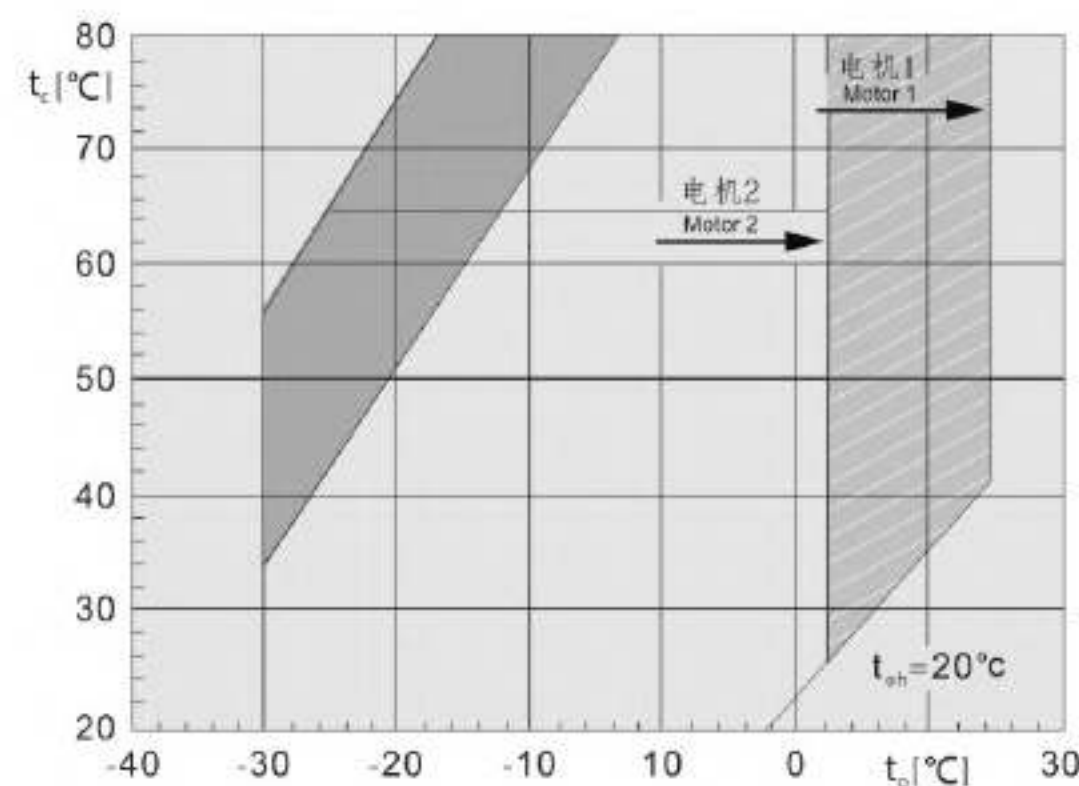

R407C

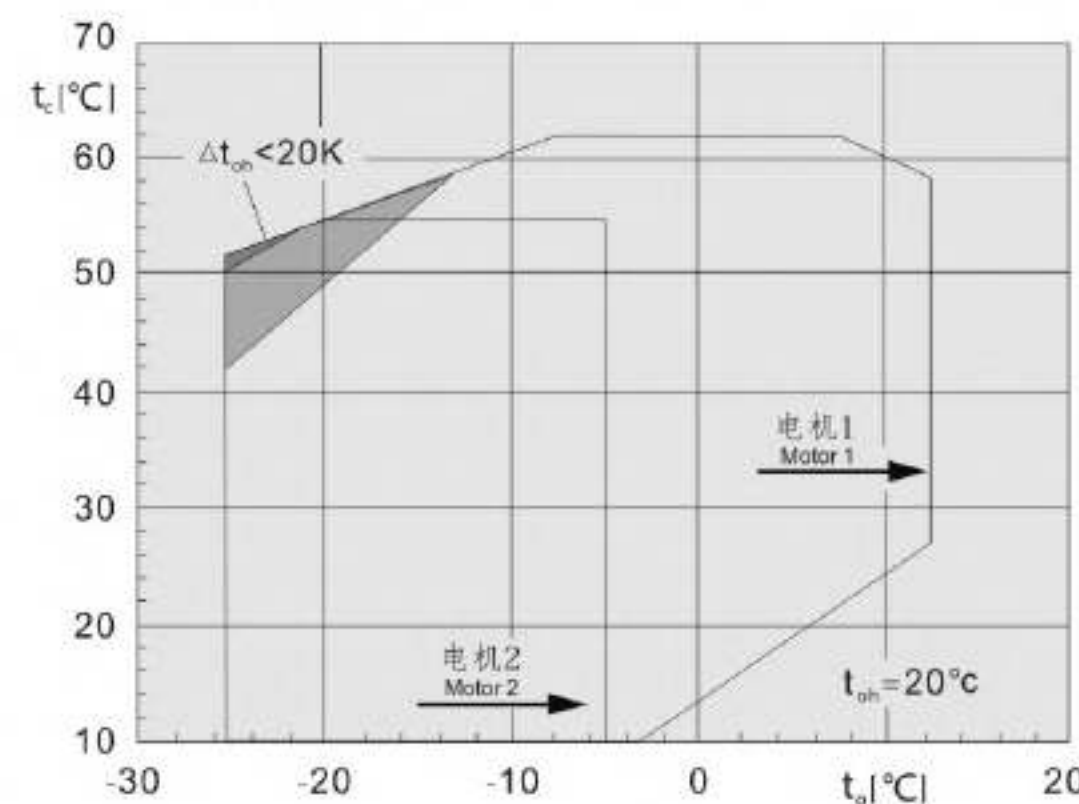


t_e Evaporating temperature(°C) t_e 蒸发温度(°C)
 t_{0h} Suction gas temperature(°C) t_{0h} 吸气温度(°C)
 Δt_{0h} Suction superheat(K) Δt_{0h} 吸气过热度(K)
 t_c Condensing temperature(°C) t_c 冷凝温度(°C)

Additional cooling or max. 0°C suction gas temperature
Additional cooling
Additional cooling&limited suction gas temperature
Suction superheat>10K
附加冷却或最高0°C吸气温度
附加冷却
附加冷却+限制最高吸气温度
吸气过热度>10K


应用范围
基于吸气温度20°C

Application Envelope
Suction gas temperature 20°C

R22 空气冷却-直接吸气冷却 Air cooling-direct suction
2YD-2.2—4YD-5.2

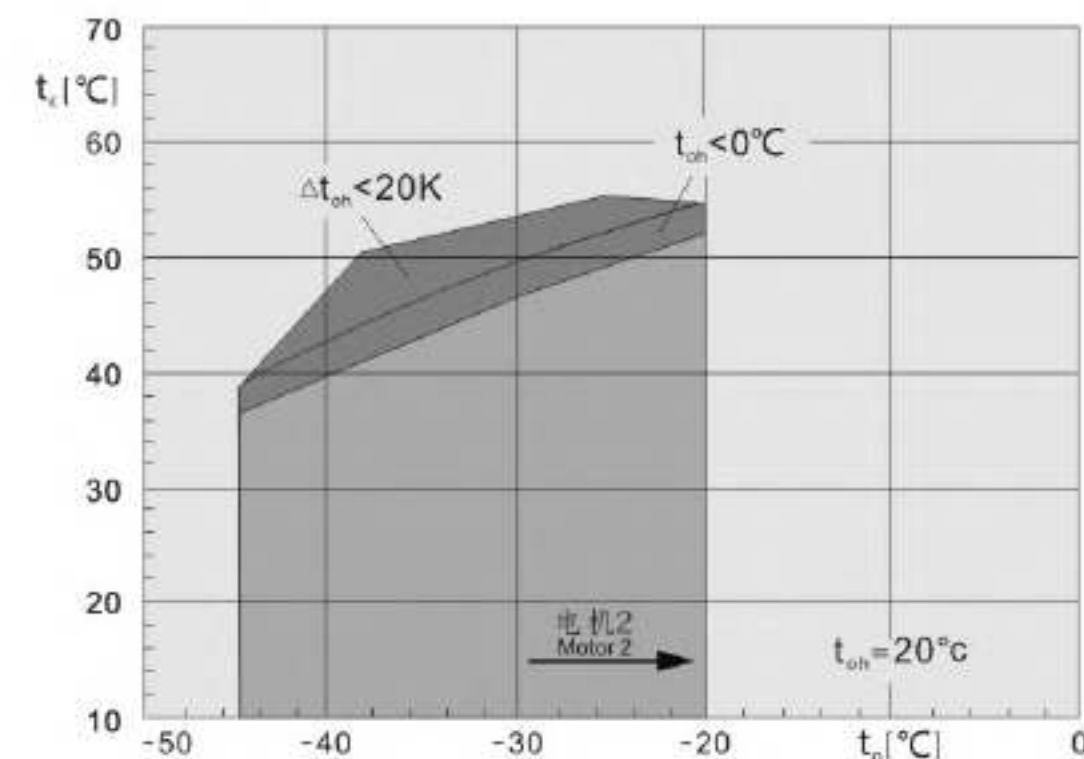


R22
4YD-8.2—6WD-40.2 4S151D—6S401D

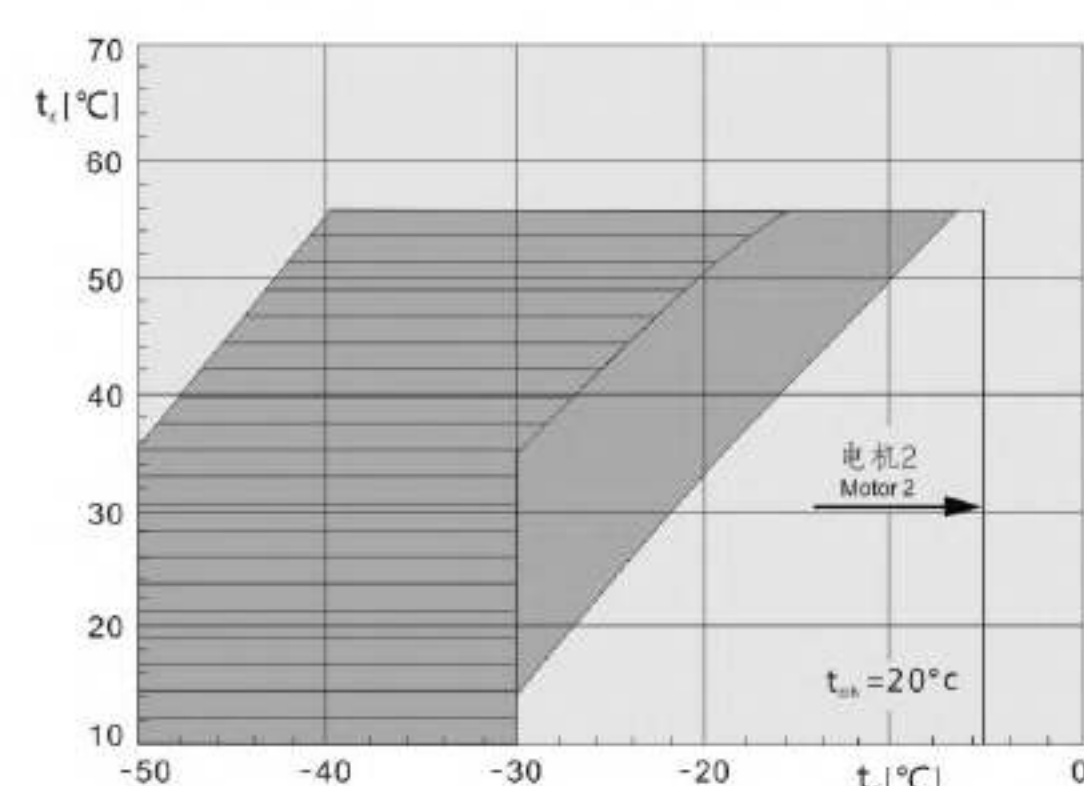


t_e Evaporating temperature(°C) t_e 蒸发温度(°C)
 t_{0h} Suction gas temperature(°C) t_{0h} 吸气温度(°C)
 Δt_{0h} Suction superheat(K) Δt_{0h} 吸气过热度(K)
 t_c Condensing temperature(°C) t_c 冷凝温度(°C)

R22 吸气冷却 Suction gas cooling
2YD-2.2—4YG-9.2

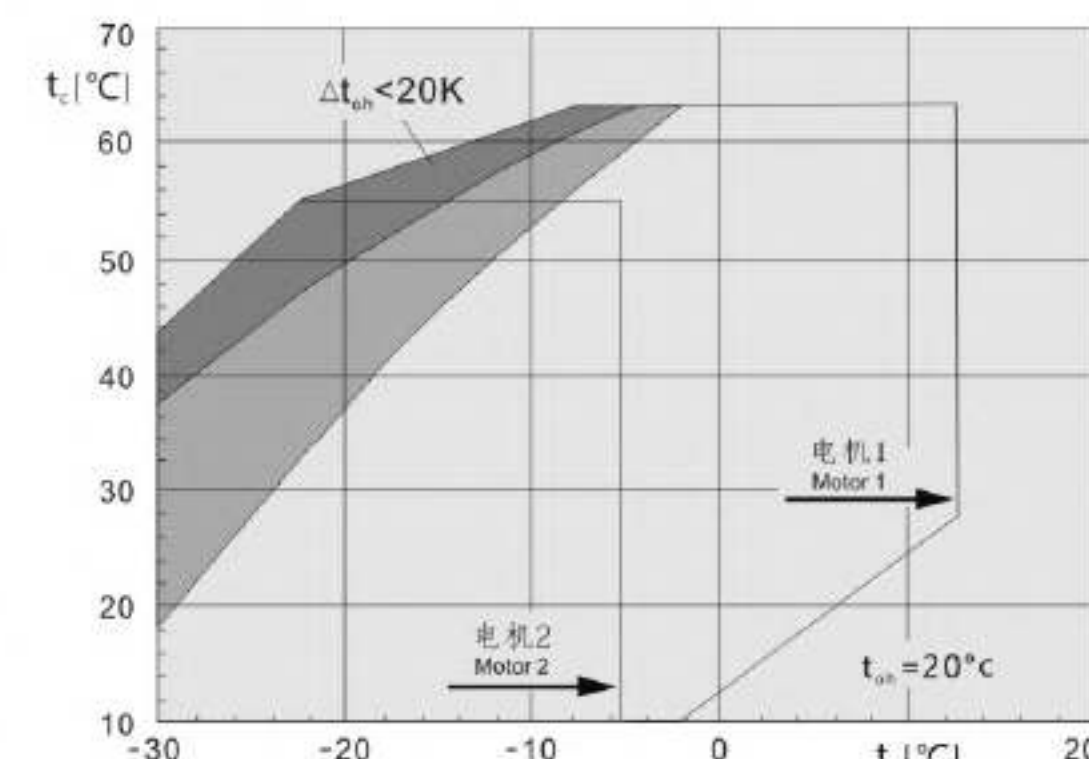

R22
4YD-8.2—6WG-50.2 4S151D—6S501G

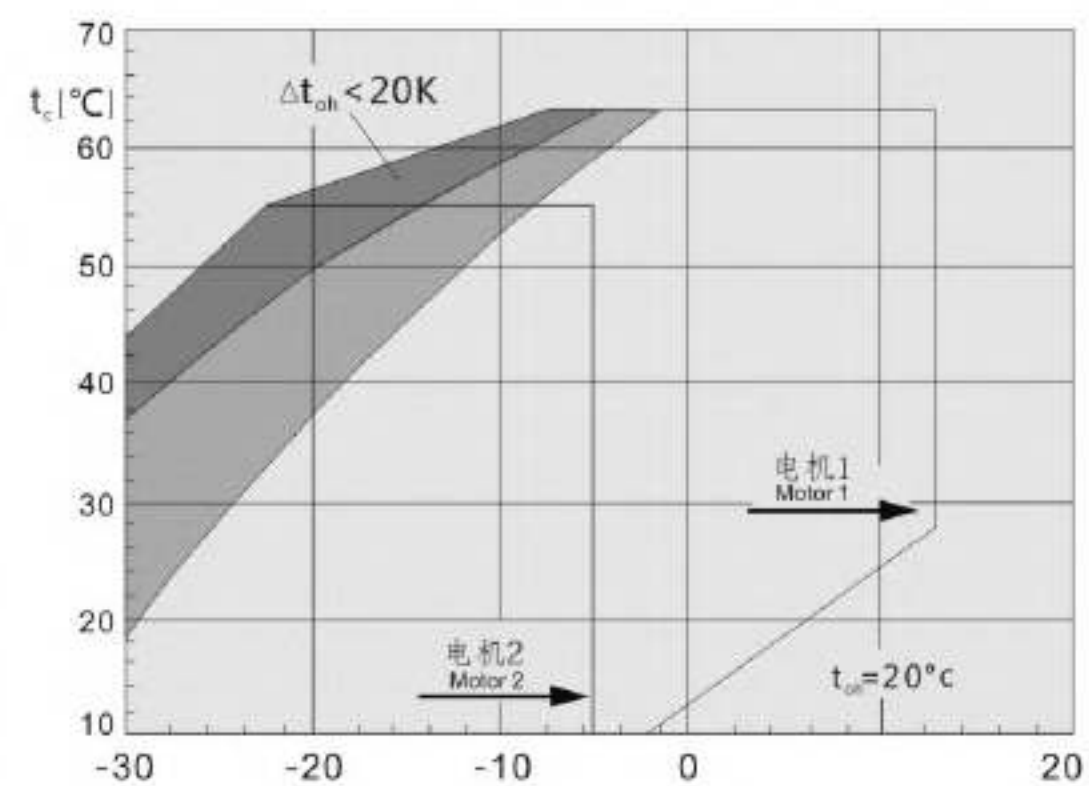

Additional cooling
Additional cooling&limited suction gas temperature
Additional cooling&liquid injection cooling system
附加冷却
附加冷却+限制最高吸气温度
附加冷却+喷液冷却系统

技术参数/ Technical Data

压缩机 型号 Compressor Model	电机 名义 功率 Nominal Motor- Power Hp/kW	排气量 Displacement m ³ /h 50/60Hz	缸数x直径 x行程 Number Of Cylinder x Diameter x Stroke mm	吸、排气阀接管 Suction, Discharge Line mm		油注入量 Oil Volume L	电源 Power Supply V/Φ/Hz	电气参数 Electrical Parameter		曲轴箱加热器 Crankcase Heater (220V) W	供油方式 Oil Supply Method	重量 Weight kg
				DL Discharge Valve	SL Suction Valve			最大工作 电流(A) Max Operating Current	启动、堵转 电流(A) Starting/ Locked Current			
BFS31	3/2.2	12.2/14.6	2 × Φ47.6 × 39.2	Φ16	Φ19.05	1.25	380- 420/3/50 440- 480/3/60	5.2	24/26	60	飞溅式润滑 Splashing lubrication	62
BFS41	4/3	14.7/17.8	2 × Φ54 × 37	Φ19.05	Φ25.4	1.85		7.6	38/44	60		85
BFS51	5/3.7	18.4/22.1	2 × Φ54 × 46	Φ19.05	Φ25.4	1.85		7.6	38/44	60		87
BFS81	8/5.5	26.6/32.1	2 × Φ64 × 48	Φ25.4	Φ31.75	3.5		15	74/81	120		133
BFS101	10/7.5	36/43.2	2 × Φ64 × 64	Φ25.4	Φ31.75	3.5		15.6	93/103	120		137
BFS151	15/10.5	54/64.8	3 × Φ64 × 64	Φ28	Φ38.1	4.8		22.3	133/150	180	油泵供油 Forced- lubrication	172
4S151D	15/10.5	73.6/88.8	4 × Φ70 × 55	Φ28	Φ42	4		31	81/132	140		183
4S251G	25/18.5	73.6/88.8	4 × Φ70 × 55	Φ28	Φ54	4.5		45	116/193	140		203
4S201D	20/15	84.5/101.9	4 × Φ75 × 55	Φ28	Φ54	4.5		37	97/158	140		192
4S301G	30/22	84.5/101.9	4 × Φ75 × 55	Φ28	Φ54	4.5		53	135/220	140		206
6S251D	25/18.5	110.5/133.4	6 × Φ70 × 55	Φ35	Φ54	4.75		45	116/193	140		224
6S351G	35/25.5	110.5/133.4	6 × Φ70 × 55	Φ42	Φ54	4.75		61	147/262	140		235
6S321D	30/22	126.8/153.0	6 × Φ75 × 55	Φ42	Φ54	4.75		53	135/220	140		228
6S401G	40/30	126.8/153.0	6 × Φ75 × 55	Φ42	Φ54	4.75		78	180/323	140		238
6S401D	40/30	151.6/183.0	6 × Φ82 × 55	Φ42	Φ54	4.75		78	180/323	140		239
6S501G	50/37	151.6/183.0	6 × Φ82 × 55	Φ42	Φ54	4.75		92	226/404	140		241

技术参数/ Technical Data



压缩机 型号 Compressor Model	电机 名义 功率 Nominal Motor- Power Hp/kW	排气量 Displacement m ³ /h 50/60Hz	缸数x直径 x行程 Number Of Cylinder x Diameter x Stroke mm	吸、排气阀接管 Suction, Discharge Line mm		油注入量 Oil Volume L	电源 Power Supply V/Φ/Hz	电气参数 Electrical Parameter		曲轴箱加热器 Crankcase Heater (220V) W	供油方式 Oil Supply Method	重量 Weight kg
				DL Discharge Valve	SL Suction Valve			最大工作 电流(A) Max Operating Current	启动、堵转 电流(A) Starting/ Locked Current			
2YD-2.2	2/1.5	13.4/16.2	2 × Φ50 × 39.3	Φ16	Φ22	1.5	220-240△ /380- 420Y/3/50 265-290△ /440- 480Y/3/60	11.9/6.9	53.7/30.7	120	离心润滑 Centrifugal lubrication	67.5
2YG-3.2	3/2.2	13.4/16.2	2 × Φ50 × 39.3	Φ16	Φ22	1.5		13.5/7.8	64/37	120		70.5
2YD-3.2	3/2.2	16.2/19.6	2 × Φ55 × 39.3	Φ16	Φ22	1.5		14.8/8.5	64/37	120		70
2YG-4.2	4/3	16.2/19.6	2 × Φ55 × 39.3	Φ16	Φ22	1.5		16.4/9.4	76.6/44.2	120		70
4YD-3.2	3/2.2	18.1/21.8	4 × Φ41 × 39.3	Φ16	Φ22	2		15.9/9.2	76.6/44.2	120		82
4YG-5.2	5/3.7	18.1/21.8	4 × Φ41 × 39.3	Φ16	Φ22	2		18.7/10.8	107.7/62.2	120		86
4YD-4.2	4/3	22.7/27.4	4 × Φ46 × 39.3	Φ22	Φ28	2		18.5/10.7	92.7/53.2	120		84
4YG-6.2	6/4.4	22.7/27.4	4 × Φ46 × 39.3	Φ22	Φ28	2		22.9/13.2	107.7/62.2	120		86
4YD-5.2	5/3.7	26.8/32.4	4 × Φ50 × 39.3	Φ22	Φ28	2		23.4/13.5	107.7/62.2	120		85.5
4YG-7.2	7/5.1	26.8/32.4	4 × Φ50 × 39.3	Φ22	Φ28	2		27.5/15.9	142.8/82.4	120		88.5
4YD-6.2	6/4.4	32.5/39.2	4 × Φ55 × 39.3	Φ22	Φ28	2		27.5/15.9	142.8/82.4	120		90.5
4YG-9.2	9/6.6	32.5/39.2	4 × Φ55 × 39.3	Φ22	Φ28	2		34.5/20	142.8/82.4	120		90.5
4YD-8.2	8/5.5	41.3/49.9	4 × Φ60 × 42	Φ28	Φ35	2.6		17	49/81	120		134
4YG-12.2	12/8.8	41.3/49.9	4 × Φ60 × 42	Φ28	Φ35	2.6		24	69/113	140		141
4YD-10.2	10/7.5	48.5/58.5	4 × Φ65 × 42	Φ28	Φ35	2.6		21	59/99	140		139
4YG-15.2	15/10.5	48.5/58.5	4 × Φ65 × 42	Φ28	Φ35	2.6		31	81/132	140		147
4YD-12.2	12/8.8	56.2/67.9	4 × Φ70 × 42	Φ28	Φ35	2.6		24	69/113	140		141

技术参数/ Technical Data



压缩机 型号 Compressor Model	电机 名义 功率 Nominal Motor- Power Hp/kW	排气量 m ³ /h 50/60Hz Displacement	缸数×直径 ×行程 Number Of Cylinder x Diameter x Stroke mm	吸、排气阀接管 Suction, Discharge Line mm		油注入量 Oil Volume L	电源 Power Supply V/Φ/Hz	电气参数 Electrical Parameter		曲轴箱加热器 Crankcase Heater (220V) W	供油方式 Oil Supply Method	重量 Weight kg
				DL Discharge Valve	SL Suction Valve			最大工作 电流(A) Max Operating Current	启动、堵转 电流(A) Starting/ Locked Current			
4YG-20.2	20/15	56.2/67.9	4 × Φ70 × 42	Φ28	Φ42	2.6	380- 420YY/3/50 440- 480YY/3/60	37	97/158	140	离心润滑 Centrifugal lubrication	150
4VD-15.2	15/10.5	73.6/88.8	4 × Φ70 × 55	Φ28	Φ42	4		31	81/132	140	油泵供油 Forced- lubrication	183
4VG-25.2	25/18.5	73.6/88.8	4 × Φ70 × 55	Φ28	Φ54	4.5		45	116/193	140		203
4VD-20.2	20/15	84.5/101.9	4 × Φ75 × 55	Φ28	Φ54	4.5		37	97/158	140		192
4VG-30.2	30/22	84.5/101.9	4 × Φ75 × 55	Φ28	Φ54	4.5		53	135/220	140		206
6WD-25.2	25/18.5	110.5/133.4	6 × Φ70 × 55	Φ35	Φ54	4.75		45	116/193	140		224
6WG-35.2	35/25.5	110.5/133.4	6 × Φ70 × 55	Φ42	Φ54	4.75		61	147/262	140		235
6WD-30.2	30/22	126.8/153.0	6 × Φ75 × 55	Φ35	Φ54	4.75		53	135/220	140		228
6WG-40.2	40/30	126.8/153.0	6 × Φ75 × 55	Φ42	Φ54	4.75		78	180/323	140		238
6WD-40.2	40/30	151.6/183.0	6 × Φ82 × 55	Φ42	Φ54	4.75		78	180/323	140		239
6WG-50.2	50/37	151.6/183.0	6 × Φ82 × 55	Φ42	Φ54	4.75		92	226/404	140		241
6WDS-20.2	20/15	73.6/36.9 88.8/44.5	6 × Φ70/70 × 55	Φ35	Φ42	4.75		37	97/158	140		220
6WDS-25.2	25/18.5	84.5/42.3 101.9/51.1	6 × Φ75/75 × 55	Φ35	Φ42	4.75		45	116/193	140		233
6WDS-30.2	30/22	101.1/50.5 122.0/60.9	6 × Φ82/82 × 55	Φ35	Φ42	4.75		53	135/220	140		234

压缩机各接口位置和外形尺寸图 Connections and Dimension



▶ BFS31---BFS151

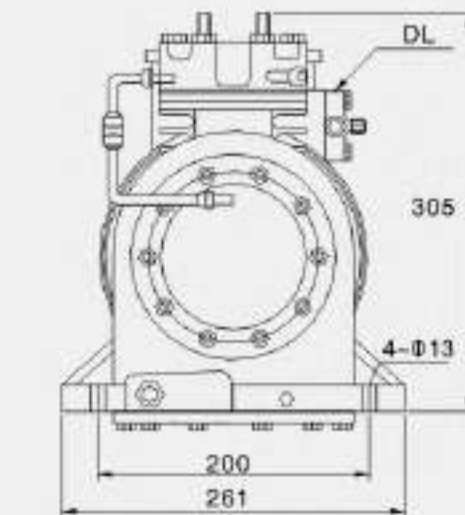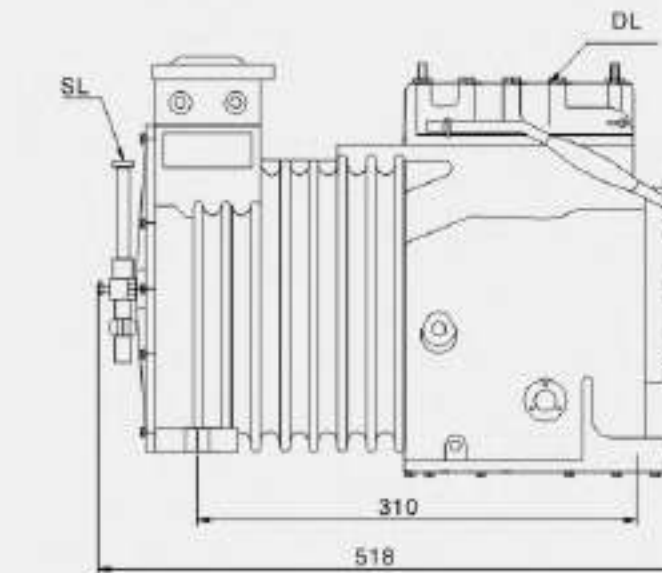


▶ 4S151D---4S301G

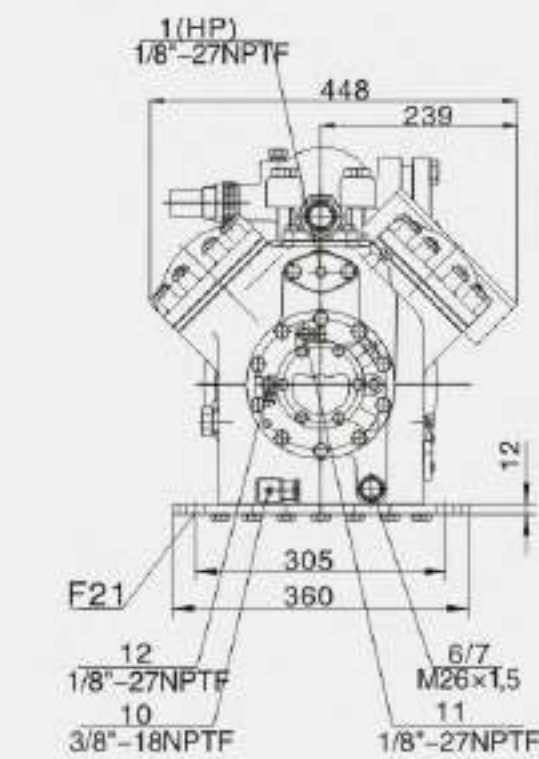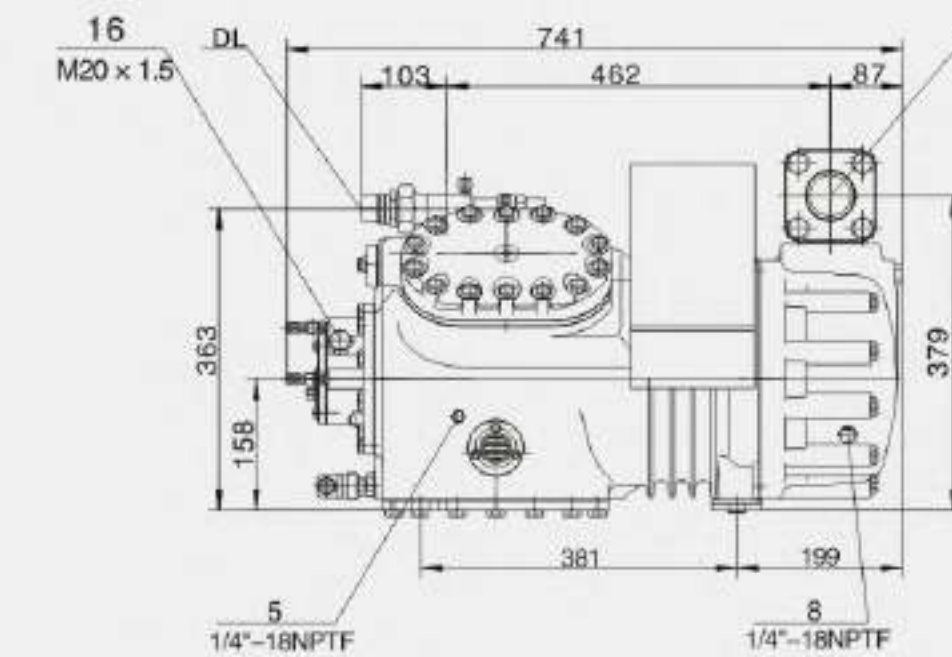


▶ 6S251D---6S501G

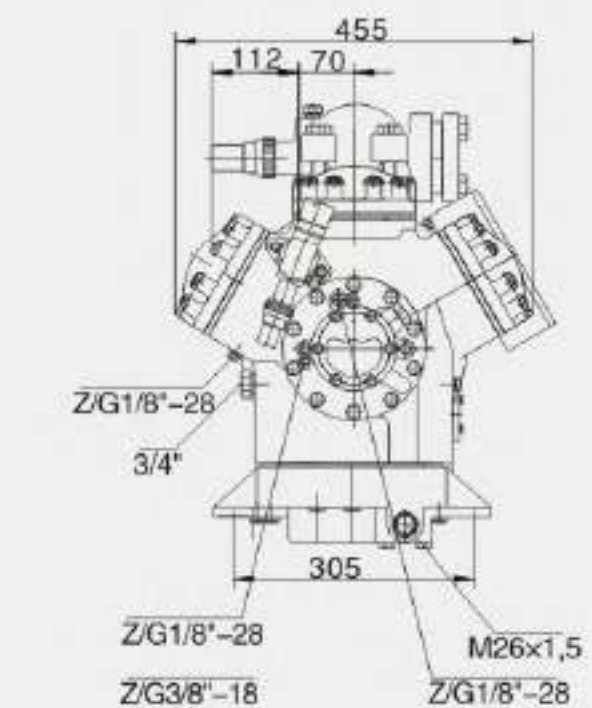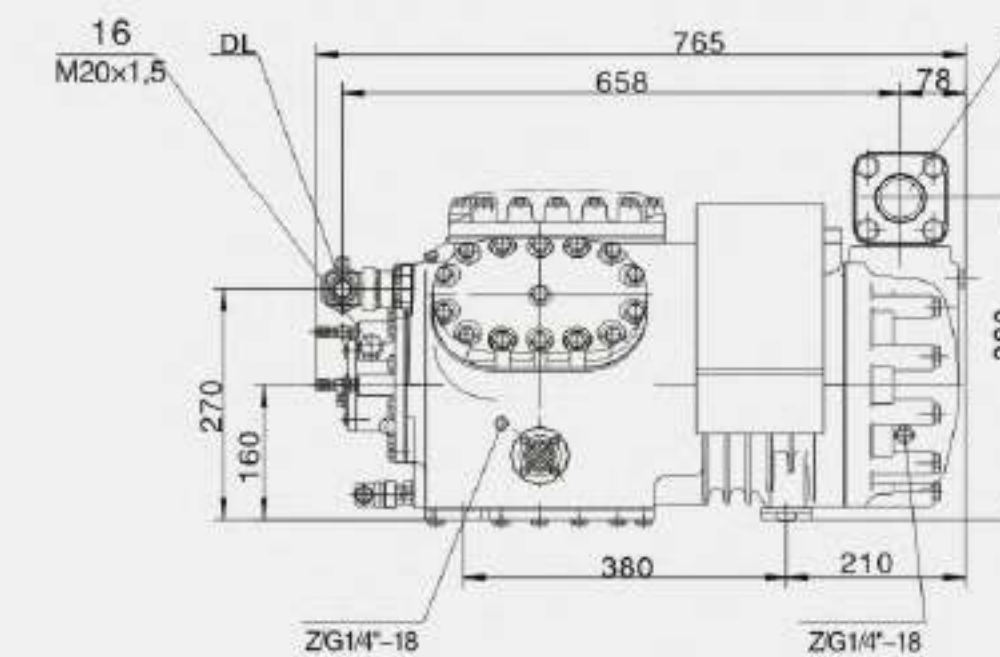


▶ 2YD-2.2--2YG-4.2

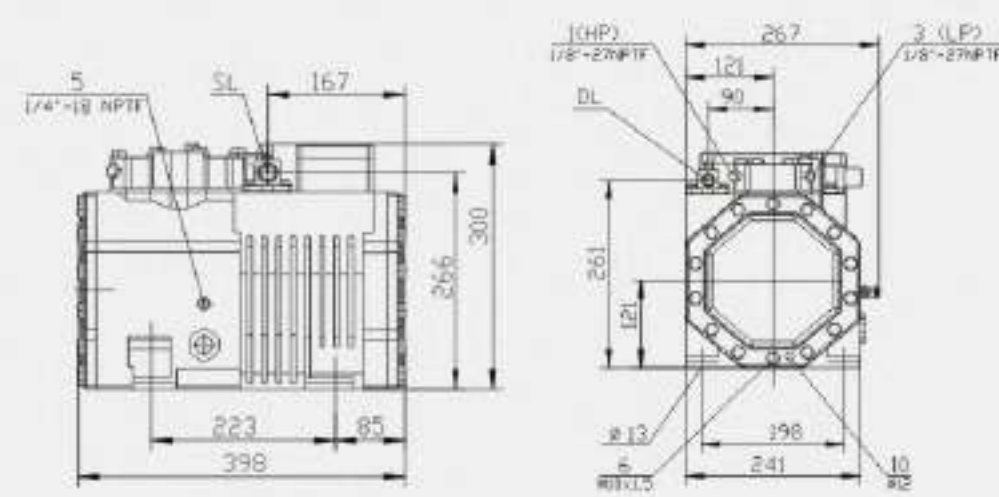


▶ 4YD-3.2--4YG-9.2

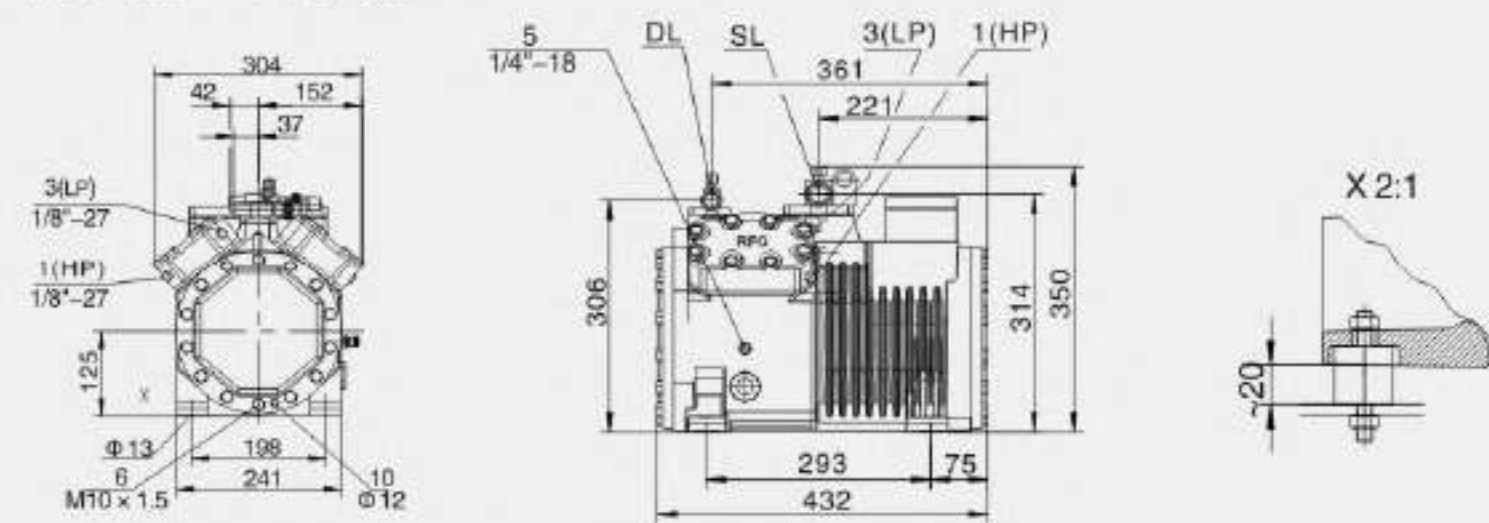


▶ 4YD-8.2--4YG-20.2

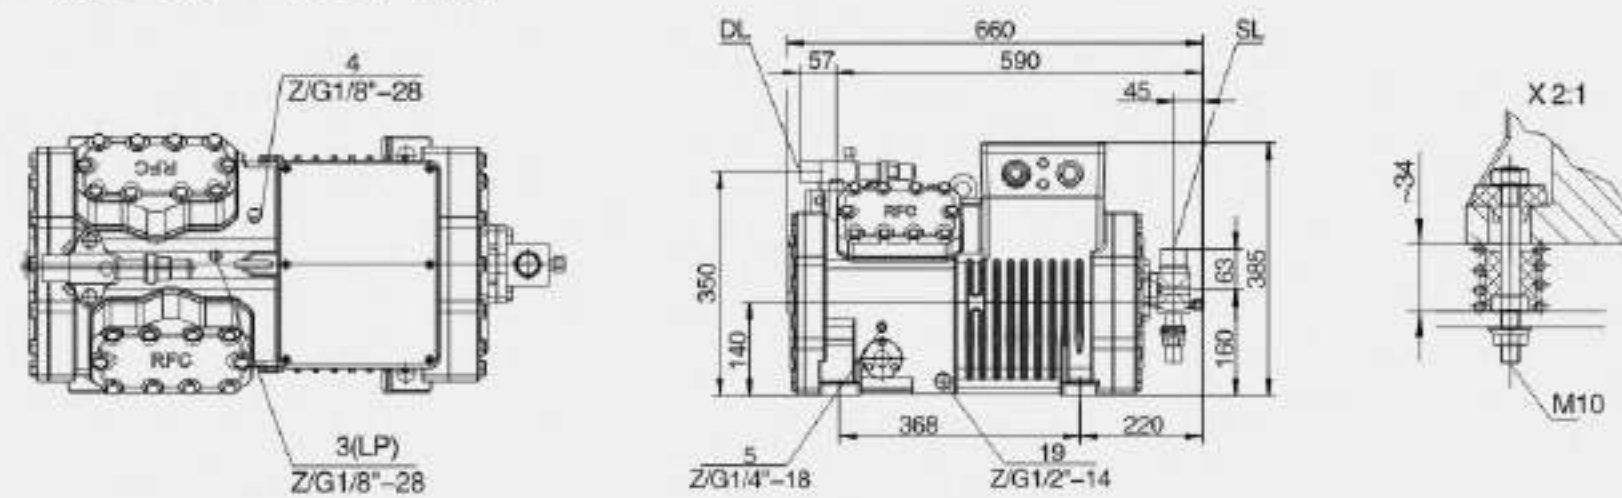


▶ 4YD-15.2--4VG-30.2

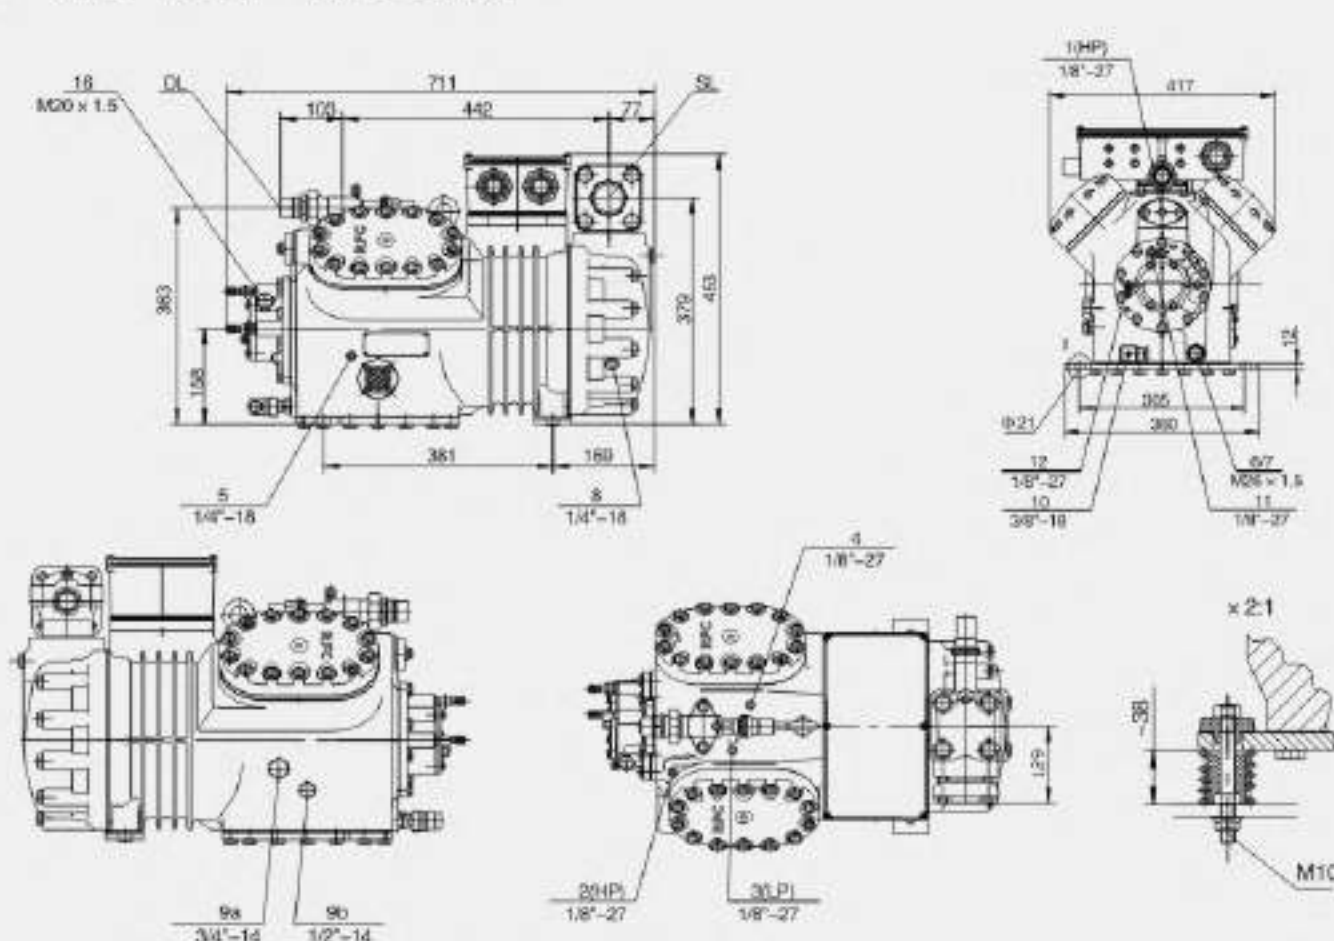

▶ 6WD-25.2--6WG-50.2

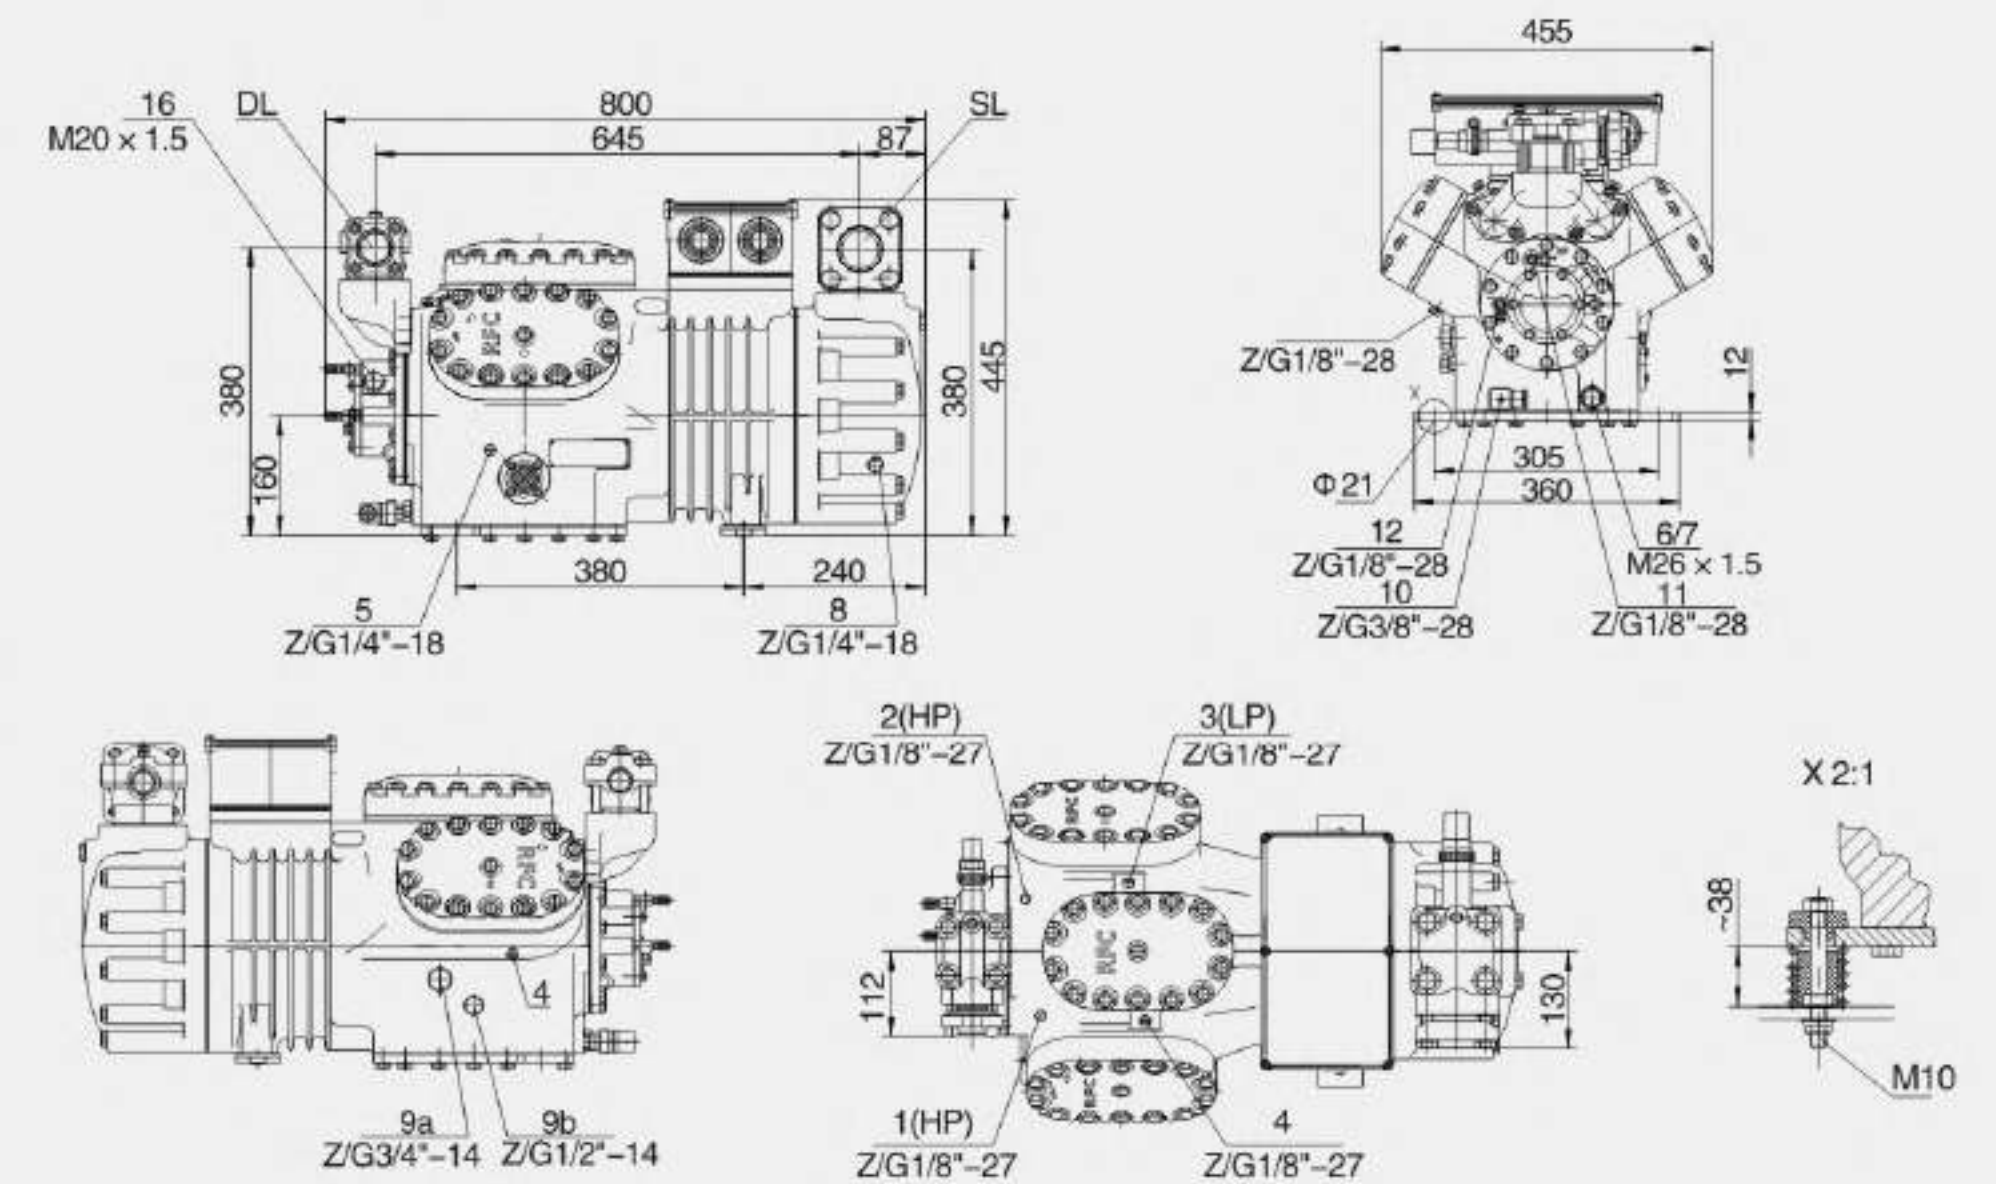

▶ 6WDS-20.2--6WDS-30.2

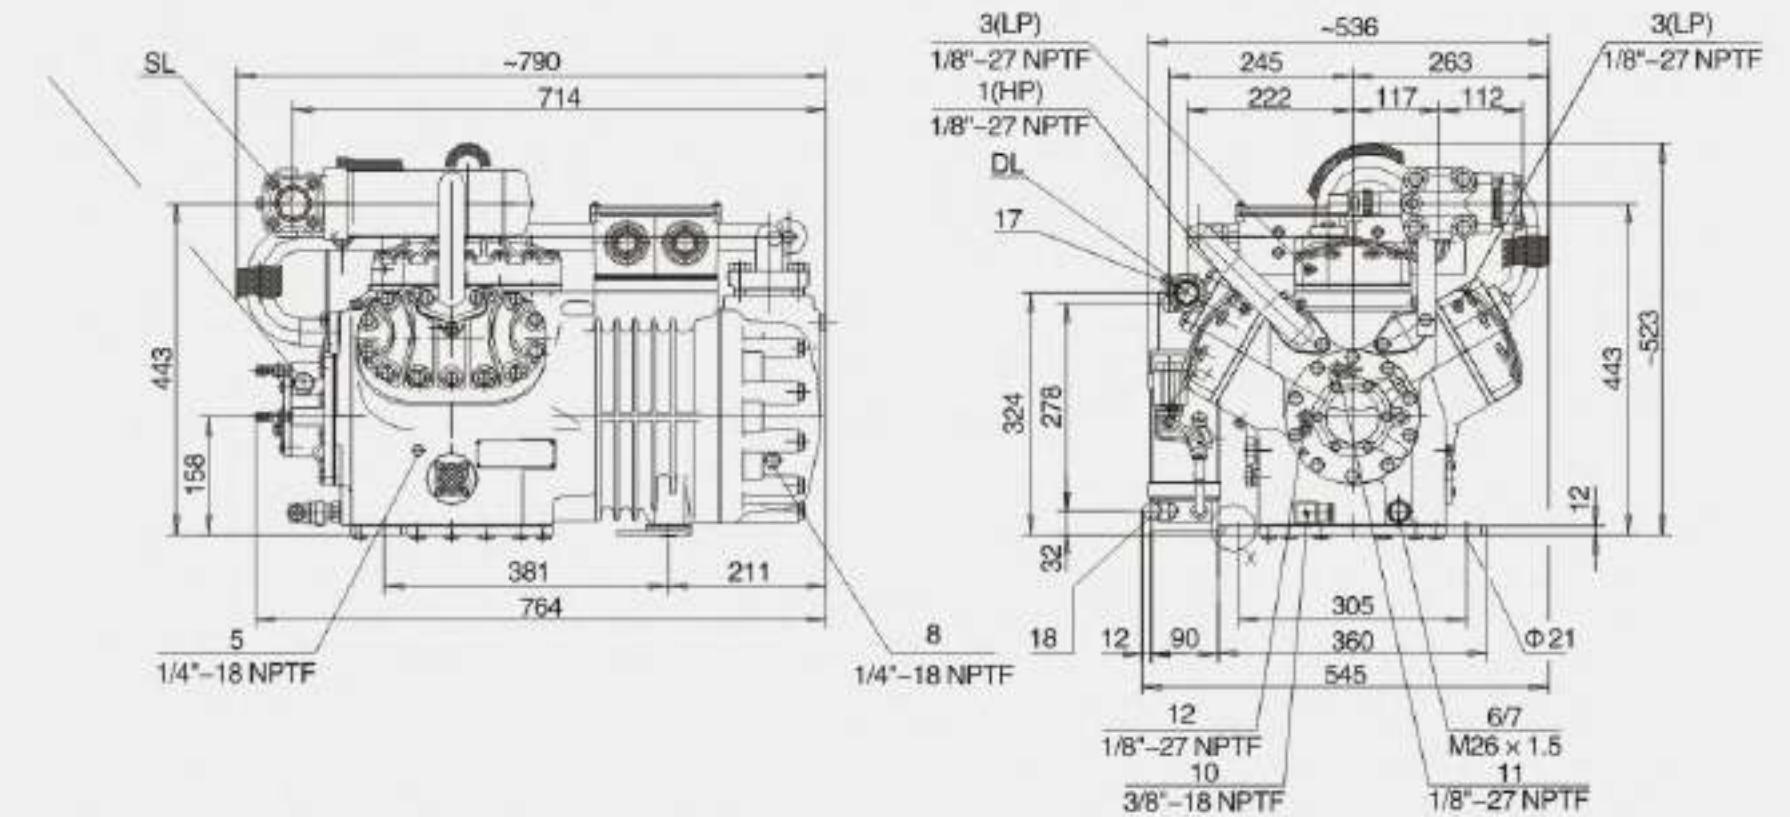

图示接管位置说明 Connection Positions

- | | | | |
|------------------------------|------------------------------------|------------------------|---|
| 1. 高压接口 (HP) | 1. High pressure connection (HP) | 9a. 气平衡接口 (并联运行) | 9a. Gas equalisation (parallel operation) |
| 2. 排气温度探头接口 (HP) | 2. Discharge gas temp. sensor (HP) | 9b. 油平衡接口 (并联运行) | 9b. Discharge gas temp. sensor (HP) |
| 3. 低压接口 (LP) | 3. Low pressure connection (LP) | 10. 曲轴箱加热器 | 10. Crankcase heater |
| 4. CIC系统: 喷嘴接口
(不带液体过冷运行) | 4. CIC System: spray nozzle | 11. 油压高压接口+ | 11. Oil pressure connection+ |
| 5. 加油堵 | 5. Oil fill plug | 12. 油压低压接口- | 12. Oil pressure connection- |
| 6. 放油口 | 6. Oil drain | 16. 油压差开关 "Delta-p" 连接 | 16. Connection for oil monitoring (Delta-p) |
| 7. 油过滤器 (带磁螺栓) | 7. Oil filter (magnetic screw) | 21. 油服务阀接口 | 21. Connection for oil service valve |
| 8. 回油口 (接油分离器) | 8. Oil return (oil separator) | SL. 吸气阀接口 | SL. Connection for suction valve |
| | | DL. 排气阀接口 | DL. Connection for discharge valve |

制冷量表/Performance Data R22

型号 Model		冷凝温度 Condensing Temperature ℃	制冷量 Refrigerating Capacity Qo(W) 功率消耗 Power Consumption Pe(kW)														
			蒸发温度 Evaporating Temperature(℃)														
			12.5	10	7.5	5	0	-5	-10	-15	-20	-25	-30	-35	-40	-45	-50
BFS31	30	Qo Pe					8430 2.33	6800 2.28	5350 2.15	4070 1.95	2730 1.70	1860 1.45					
	40	Qo Pe					7380 2.70	5820 2.55	4530 2.35	3370 2.05							
	50	Qo Pe					6300 3.00	4940 2.78	3840 2.48	2820 2.15							
BFS41	30	Qo Pe	14350 3.01 12330 2.93				10590 2.80	8430 2.68	6750 2.50	5180 2.30	3840 2.02	2500 1.68					
	40	Qo Pe	13250 3.60 10820 3.45				9200 3.23	7270 3.00	5700 2.73	4250 2.43							
	50	Qo Pe	11570 4.18 9780 3.93				7910 3.60	6160 3.25	4760 2.88	3430 2.45							
BFS51	30	Qo Pe					13140 3.50	10760 3.35	8720 3.15	6860 2.90	5300 2.63	3840 2.30					
	40	Qo Pe					11750 4.08	9600 3.80	7620 3.50	6050 3.15							
	50	Qo Pe					10380 4.55	8370 4.20	6570 3.78	5030 3.30							
BFS81	30	Qo Pe	28140 5.07 22790 4.91				19930 4.69	15580 4.42	12320 4.10	9650 3.75	7270 3.35	5350 2.95					
	40	Qo Pe	25580 6.25 20930 5.85				16970 5.42	13480 4.97	10500 4.50	8250 4.00							
	50	Qo Pe	23260 7.03 19180 6.55				14650 6.00	11740 5.40	9070 4.75	6740 4.15							
BFS101	30	Qo Pe					26510 7.15	21620 6.75	17450 6.25	13720 5.75	10700 5.20	8140 4.65					
	40	Qo Pe					23730 8.20	19420 7.60	15350 6.90	12100 6.25							
	50	Qo Pe					21040 9.15	17090 8.30	13490 7.50	10580 6.65							
BFS151	30	Qo Pe					38960 10.30	31750 9.80	25350 9.10	20170 8.25	15700 7.40	11980 6.60					
	40	Qo Pe					34890 11.80	28260 10.90	22560 9.90	17800 8.85							
	50	Qo Pe					30700 13.10	24880 11.90	19650 10.75	15580 9.50							
4S151D	30	Qo Pe					52300 12.73	42700 11.93	34450 11.01	27350 9.98	21300 8.82	16400 8.25	12000 7.13	8310 5.98			
	40	Qo Pe					46850 14.91	38100 13.81	30500 12.56	24050 11.19	18500 9.76	13840 8.67	9800 7.30	6440 5.90			
	50	Qo Pe					41700 17.11	33700 15.67	26800 14.13	20800 12.47	15800 10.85	11500 9.21	7920 7.53	4970 5.79			
4S251G	30	Qo Pe	99300 13.89	91200 13.74	83600 13.56	76500 13.34	63700 12.84	52600 12.22	42950 11.48	34650 10.63	27500 9.67	21400 8.59	16260 7.41				
	40	Qo Pe	89700 16.75	82300 16.47	75400 16.16	68900 15.82	57300 15.05	47150 14.17	38350 13.18	30800 12.07	24250 10.85	18670 9.52	13940 8.08				
	50	Qo Pe	80500 19.56	73800 19.16	67600 18.74	61700 18.27	51100 17.25	41950 16.10	33950 14.83	27050 13.44	21100 11.94	16030 10.33					
4S201D	30	Qo Pe					60000 14.64	48950 13.67	39500 12.63	31400 11.51	24500 10.29	18940 9.65	13920 8.40	9670 7.10			
	40	Qo Pe					53700 17.39	43700 16.04	35100 14.60	27750 13.07	21500 11.42	16080 10.35	11430 8.75	7530 7.14			
	50	Qo Pe					47800 20.10	38750 18.40	30950 16.65	24200 14.89	18350 13.14	13390 11.23	9230 9.19	5790 7.06			
4S301G	30	Qo Pe	114200 16.42	104800 16.23	96000 16.01	87800 15.74	73100 15.11	60400 14.33	49300 13.44	39800 12.45	31650 11.36	24700 10.21	18840 9.00				
	40	Qo Pe	103000 19.78	94500 19.46	86500 19.09	79100 18.68	65700 17.74	54000 16.67	44000 15.49	35350 14.20	27950 12.83	21650 11.40	16330 9.92				
	50	Qo Pe	92300 23.40	84600 22.90	77400 22.30	70700 21.70	58600 20.40	48100 19.04	39000 17.57	31200 16.05	24500 14.49	18810 12.91					
6S251D	30	Qo Pe					78500 19.10	64100 17.89	51700 16.51	41050 14.96	31950 13.23	24800 12.34	18010 10.70	12460 8.99			
	40	Qo Pe					70300 22.40	57200 20.70	45850 18.84	36100 16.79	27750 14.63	20750 13.01	14710 10.96	9660 8.86			
	50	Qo Pe					62600 25.60	50600 23.50	40250 21.20	31350 18.68	23700 16.28	17240 13.81	11870 11.27	7440 8.66			

参数基于吸气温度20℃, 50Hz, 液体无过冷。Suction gas temperature 20℃, 50Hz, without liquid subcooling.

附加冷却或限制吸气温度。Additional cooling or limited suction gas temperature.

附加冷却和喷液冷却系统。Additional cooling & liquid injection cooling system.

制冷量表/Performance Data R22

型号 Model		冷凝温度 Condensing Temperature ℃	制冷量 Refrigerating Capacity Qo(W) 功率消耗 Power Consumption Pe(kW)															
			蒸发温度 Evaporating Temperature(℃)															
			↓	12.5	10	7.5	5	0	-5	-10	-15	-20	-25	-30	-35	-40	-45	-50
6S351G	30	Qo	149100	136900	125500	114800	95600	79000	64500	52000	41300	32200	24400					
		Pe	20.90	20.60	20.40	20.00	19.27	18.34	17.24	15.96	14.52	12.90	11.12					
	40	Qo	134600	123500	113200	10350	86000	70800	57600	46200	36400	28050	20900					
		Pe	25.20	24.70	24.30	23.70	22.60	21.30	19.78	18.12	16.29	14.30	12.14					
	50	Qo	120900	110800	101400	92700	76800	63000	51000	40600	31700	24050						
		Pe	29.40	28.80	28.10	27.40	25.90	24.20	22.30	20.20	17.92	15.50						
6S321D	30	Qo						90000	73500	59300	47100	36750	28400	20850	14480			
		Pe						22.00	20.50	18.96	17.27	15.43	14.48	12.59	10.65			
	40	Qo						80600	65600	52700	41600	32200	24100	17130	11280			
		Pe						26.10	24.10	21.90	19.61	17.14	15.50	13.10	10.68			
	50	Qo						71700	58200	46500	36300	27500	20050	13840	8670			
		Pe						30.10	27.60	25.00	22.31	19.71	16.85	13.79	10.58			
6S401G	30	Qo	171300	157200	144100	131800	109700	90600	74000	59700	47500	37100	28300					
		Pe	24.60	24.40	24.00	23.60	22.70	21.50	20.20	18.68	17.05	15.32	13.51					
	40	Qo	154600	141800	129800	118600	98500	81100	66000	53000	41900	32450	24500					
		Pe	29.70	29.20	28.60	28.00	26.60	25.00	23.20	21.30	19.26	17.11	14.89					
	50	Qo	138500	127000	116200	106100	88000	72200	58500	46800	36750	28200						
		Pe	35.20	34.40	33.50	32.60	30.70	28.60	26.40	24.10	21.70	19.38						
6S401D	30	Qo						106100	86800	70100	55900	43800	34000	25100	17600			
		Pe						27.40	25.50	23.50	21.20	18.92	17.07	14.95	12.96			
	40	Qo						95300	77700	62600	49650	38700	29150	20900	13960			
		Pe						31.90	29.50	27.00	24.30	21.40	18.61	15.80	13.06			
	50	Qo						85100	69200	55600	43600	33250	24450	17060	10890			
		Pe						36.40	33.50	30.40	27.04	23.71	20.21	16.60	12.94			
6S501G	30	Qo	201400	184800	169400	155000	129100	106700	87300	70600	56300	44150	33900					
		Pe	31.90	31.40	30.80	30.20	28.70	27.10	25.30	23.30	21.20	18.97	16.66					
	40	Qo	181700	166700	152800	139800	116300	95900	78300	63100	50100	39050	29700					
		Pe	37.60	36.90	36.10	35.20	33.30	31.30	29.00	26.60	24.00	21.30	18.44					
	50	Qo	163200	149700	137100	125300	104100	85700	69700	56000	44250	34250						
		Pe	43.00	42.10	41.10	40.10	37.90	35.50	32.80	29.90	26.80	23.50						
2YD-2.2	30	Qo						9110	7430	5980	5150	4030	3100	2330	1700			
		Pe						2.42	2.29	2.14	2.02	1.82	1.62	1.43	1.24			
	40	Qo						7970	6430	5110	4370	3370	2550	1870	1330			
		Pe						2.77	2.57	2.35	2.22	1.97	1.73	1.49	1.26			
	50	Qo						6790	5400	4200	3520	2660	1960	1390				
		Pe						3.08	2.80	2.53	2.40	2.09	1.80	1.54				
2YG-3.2	30	Qo	17280	15860	14530	13290	11060	9120	7440	5990	4740	3670	2770					
		Pe	2.01	2.14	2.24	2.31	2.36	2.33	2.24	2.09	1.92	1.74	1.58					
	40	Qo	15400	14110	12910	11780	9750	7980	6450	5120	3970	3000	2160					
		Pe	2.89	2.92	2.93	2.92	2.84	2.69	2.50	2.28	2.06	1.86	1.70					
	50	Qo	13490	12320	11230	10220	8380	6780	5390	4190	3160	2270						
		Pe	3.64	3.59	3.52	3.44	3.23	2.98	2.72	2.45	2.20	2.00						
2YD-3.2	30	Qo						11350	9290	7500	6390	5040	3890	2940	2160			
		Pe						2.85	2.74	2.56	2.40	2.15	1.91	1.70	1.49			
	40	Qo						9880	8010	6380	5400	4180	3140	2290	1680			
		Pe						3.32	3.07	2.79	2.56	2.27	2.00	1.74	1.47			
	50	Qo						8370	6680	5230	4450	3340	2430	1680				
		Pe						3.73	3.39	3.04	2.79	2.46	2.19	1.90				
2YG-4.2	30	Qo	21400	19650	18020	16490	13750	11360	9290	7510	5970	4660	3550					
		Pe	2.48	2.63	2.74	2.83	2.91	2.88	2.78	2.61	2.40	2.17	1.93					
	40	Qo	18960	17380	15910	14540	12050	9890	8020	6390	5000	3800	2780					
		Pe	3.67	3.69	3.68	3.64	3.51	3.31	3.06	2.79	2.51	2.24	2.01					
	50	Qo	16490	15080	13760	12520	10290	8350	6670	5210	3960	2880						
		Pe	4.61	4.51	4.40	4.27	3.99	3.67	3.33	3.01	2.72	2.47						
4YD-3.2	30	Qo						12760	10380	8310	7070	5540	4260	3190	2300			
		Pe						3.25	3.07	2.86	2.68	2.43	2.17	1.93	1.71			
	40	Qo						11220	9030	7140	6010	4650	3510	2560	1790			
		Pe						3.78	3.48	3.16	2.96	2.62	2.28	1.97	1.70			
	50	Qo						9650	7670	5950	4960	3770	2770	1940				
		Pe						4.22	3.82	3.42	3.25	2.88	2.52	2.13				
4YG-5.2	30	Qo	24400	22350	20500	18720	15540	12780	10390	8320	6550	5030	3740					
		Pe	2.84	2.97	3.06	3.13	3.17	3.12	2.99	2.80	2.57	2.32	2.07					
	40	Qo	21800	19960	18250	16650	13750	11230	9040	7150	5530	4130	2950					
		Pe	4.00	4.02	4.02	3.99	3.86	3.66	3.40	3.11	2.80	2.49	2.21					
	50	Qo	19180	17530	15980	14530	11920	9640	7660	5950	4480	3220						
		Pe	5.00	4.93	4.84	4.72	4.45	4.12	3.76	3.39	3.02	2.67						
4YD-4.2	30	Qo						15780	12860	10350	8820	6930	5340	4010	2910			
		Pe						3.97	3.78	3.54	3.31	3.07	2.76	2.41	2.09			
	40	Qo						13840	11180	8880	7550	5860	4440	3270	2300			
		Pe						4.60	4.28	3.92	3.66	3.32	2.94	2.55	2.17			
	50	Qo						11860	9450	7360	6160	4690	3450	2420				
		Pe						5.11	4.68	4.24	4.01	3.57	3.04	2.49				

制冷量表/Performance Data R22

冷 凝 温 度 型 号 Condensing Model Temperature ℃		制 冷 量 Refrigerating Capacity Qo(W) 功 率 消 耗 Power Consumption Pe(kW)															
		蒸 发 温 度 Evaporating Temperature(℃)															
		↓	12.5	10	7.5	5	0	-5	-10	-15	-20	-25	-30	-35	-40	-45	-50
4YG-6.2	30	Qo Pe	29950 3.43	27500 3.64	25200 3.79	23050 3.90	19160 3.98	15800 3.91	12880 3.73	10360 3.47	8200 3.17	6350 2.86	4780 2.58				
	40	Qo Pe	26750 4.97	24500 5.03	22400 5.03	20450 5.00	16930 4.83	13860 4.56	11190 4.22	8890 3.84	6910 3.46	5210 3.12	3770 2.84				
	50	Qo Pe	23450 6.31	21450 6.22	19570 6.09	17810 5.94	14630 5.56	11850 5.12	9440 4.65	7350 4.19	5580 3.77	4020 3.43					
4YD-5.2	30	Qo Pe						19140 4.77	15600 4.51	12540 4.21	10300 3.93	8110 3.62	6260 3.27	4690 2.91	3380 2.55		
	40	Qo Pe						16830 5.56	13590 5.14	10800 4.70	8830 4.35	6880 3.92	5220 3.49	3820 3.05	2650 2.62		
	50	Qo Pe						14480 6.23	11550 5.66	9020 5.09	7280 4.67	5570 4.23	4120 3.82	2920 3.39			
4YG-7.2	30	Qo Pe	36400 4.21	33400 4.37	30600 4.49	28000 4.57	23250 4.63	19160 4.56	15610 4.40	12540 4.15	9910 3.85	7670 3.51	5760 3.15				
	40	Qo Pe	32500 5.83	29750 5.86	27200 5.86	24850 5.82	20550 5.66	16830 5.40	13600 5.06	10800 4.67	8400 4.24	6340 3.80	4590 3.36				
	50	Qo Pe	28500 7.28	26100 7.19	23800 7.07	21700 6.93	17830 6.57	14480 6.14	11560 5.65	9030 5.13	6850 4.61	4970 4.09					
4YD-6.2	30	Qo Pe						22950 5.76	18740 5.48	15120 5.16	12000 4.80	9340 4.39	7070 3.91				
	40	Qo Pe						20250 6.62	16410 6.18	13090 5.72	10230 5.22	7780 4.68	5700 4.09				
	50	Qo Pe						17510 7.50	14010 6.91	10990 6.30	8390 5.67	6160 5.00					
4YG-9.2	30	Qo Pe	43300 5.50	39750 5.69	36450 5.82	33350 5.90	27800 5.92	22950 5.78	18750 5.53	15120 5.18	12000 4.77	9330 4.34	7060 3.93				
	40	Qo Pe	38900 7.45	35650 7.42	32600 7.36	29800 7.26	24700 7.00	20250 6.64	16420 6.21	13100 5.72	10240 5.20	7790 4.66	5710 4.13				
	50	Qo Pe	34250 9.27	31350 9.05	28650 8.82	26100 8.57	21500 8.06	17500 7.50	14010 6.92	10990 6.30	8380 5.66	6150 4.99					
4YD-8.2	30	Qo Pe						30700 7.30	25200 6.91	20450 6.44	16370 5.89	12880 5.29	9830 4.66	7320 4.01	5220 3.35		
	40	Qo Pe						27100 8.39	22150 7.77	17840 7.11	14150 6.42	11000 5.70	8200 5.06	5920 4.31	4010 3.51		
	50	Qo Pe						23450 9.40	19050 8.58	15250 7.73	11880 6.90	9050 6.09	6640 5.25	4610 4.37	2910 3.43		
4YG-12.2	30	Qo Pe	57100 6.90	52400 7.04	48100 7.13	44000 7.18	36700 7.17	30350 7.00	24800 6.70	20050 6.28	15930 5.76	12410 5.15	9410 4.46				
	40	Qo Pe	50800 9.07	46650 9.03	42750 8.95	39100 8.84	32550 8.52	26800 8.09	21850 7.56	17550 6.95	13850 6.27	10680 5.55	7980 4.79				
	50	Qo Pe	44400 11.07	40700 10.87	37250 10.64	34050 10.38	28200 9.80	23150 9.13	18770 8.39	14980 7.59	11730 6.74	8950 5.86					
4YD-10.2	30	Qo Pe						35650 8.44	29250 8.03	23700 7.49	18940 6.86	14860 6.14	11330 5.46	8390 4.70	5920 3.96		
	40	Qo Pe						31450 9.74	25700 9.03	20700 8.25	16390 7.42	12710 6.56	9500 5.68	6850 4.83	4630 4.02		
	50	Qo Pe						27300 10.92	22150 9.94	17700 8.93	13800 7.95	10510 6.91	7700 5.89	5330 4.93	3350 4.04		
4YG-15.2	30	Qo Pe	68400 8.33	62800 8.45	57600 8.52	52700 8.54	43800 8.45	36150 8.20	29500 7.81	23750 7.28	18810 6.65	14590 5.93	11000 5.14				
	40	Qo Pe	60900 10.65	55900 10.57	51200 10.45	46800 10.29	38850 9.88	31950 9.35	26000 8.72	20800 8.00	16360 7.21	12550 6.36	9320 5.49				
	50	Qo Pe	53300 12.86	48900 12.58	44700 12.27	40800 11.94	3380 11.23	27700 10.45	22400 9.60	17860 8.70	13940 7.74	10610 6.73					
4YD-12.2	30	Qo Pe						41150 10.01	33750 9.48	27400 8.79	21900 8.02	17210 7.16	12990 6.29	9600 5.41	6760 4.55		
	40	Qo Pe						36650 11.46	29950 10.60	24150 9.66	19170 8.66	14910 7.64	11040 6.66	7960 5.67	5400 4.75		
	50	Qo Pe						32050 12.77	26050 11.63	20850 10.43	16150 9.27	12280 8.09	8980 6.94	6200 5.84	3880 4.81		
4YG-20.2	30	Qo Pe	79100 10.60	72600 10.62	66600 10.59	61000 10.53	50800 10.29	41900 9.92	34250 9.41	27600 8.77	21900 8.02	16980 7.15	12810 6.18				
	40	Qo Pe	70600 13.15	64800 13.02	59300 12.85	54200 12.63	45000 12.06	37000 11.34	30100 10.51	24100 9.58	18920 8.59	14500 7.54	10750 6.48				
	50	Qo Pe	61900 15.74	56700 15.40	51900 15.01	47400 14.59	39250 13.65	32150 12.60	26000 11.46	20650 10.26	16050 9.02	12130 7.78					
4YD-15.2	30	Qo Pe						52300 12.73	42700 11.93	34450 11.01	27350 9.98	21300 8.82	16400 8.25	12000 7.13	8310 5.98		
	40	Qo Pe						46850 14.91	38100 13.81	30500 12.56	24050 11.19	18500 9.76	13840 8.67	9800 7.30	6440 5.90		
	50	Qo Pe						41700 17.11	33700 15.67	26800 14.13	20900 12.47	15800 10.85	11500 9.21	7920 7.53	4970 5.79		

制冷量表/Performance Data R22

冷凝温度 型号 Condensing Model Temperature ℃		制冷量 Refrigerating Capacity Qo(W) 功率消耗 Power Consumption Pe(kW)																	
		蒸发温度 Evaporating Temperature(℃)																	
		↓	7.5	5	0	-5	-10	-15	-20	-25	-30	-35	-40	-45	-50	-55	-60	-65	-70
BFS51	30	24000 22200 18600			15400	12600	10200	8500	6700	5300	4000	3000							
	40	20400 18900 15800			13100	10700	8700	7200	5700	4500	3400	2600							
BFS81	30	31400 28700 24000			20000	16400	13400	10700	8500	6500	4900	3700							
	40	26400 24100 20200			16800	13800	11300	9000	7100	5500	4200	3100							
BFS101	30	44800 44200 35100			29000	23900	19400	15600	12300	9500	7200	5300							
	40	38100 35600 29800			24600	20300	16500	13200	10500	8100	6100	4500							
BFS151	30	69000 64500 54300			45200	37300	30500	25600	19600	15300	11700	8900							
	40	58700 54800 46200			38400	31700	25900	21800	16700	13000	9900	7500							
4S151D	30	Qo				58500	48400	39700	32200	25750	20250	15560	11630	8350					
		Pe				15.78	14.84	13.79	12.63	11.40	10.10	8.77	7.43	6.10					
	40	Qo				49850	41150	33600	27100	21500	16730	12660	9240	6380					
		Pe				18.16	16.80	15.34	13.82	12.25	10.65	9.05	7.47	5.93					
	50	Qo					33950	27600	22050	17330	13270	9820	6920						
		Pe					18.50	16.67	14.80	12.91	11.03	9.17	7.37						
4S251G	30	Qo	90700	83200	69700	57900	47750	38950	31350	24800	19210	14460	10460						
		Pe	16.14	16.07	15.72	15.14	14.36	13.41	12.32	11.11	9.81	8.46	7.08						
	40	Qo	77400	71000	59500	49400	40650	33000	26450	20800	15930	11800	8320						
		Pe	19.56	19.22	18.37	17.32	16.11	14.76	13.31	11.78	10.20	8.60	7.00						
	50	Qo	64500	59100	49500	41000	33600	27200	21600	16830	12740	9260	6340						
		Pe	22.78	22.18	20.84	19.33	17.71	15.98	14.18	12.34	10.49	8.65	6.86						
4S201D	30	Qo				67100	55500	45400	36750	29350	23000	17600	13060	9260					
		Pe				18.22	17.12	15.89	14.55	13.12	11.62	10.08	8.53	6.97					
	40	Qo				57200	47300	38700	31200	24800	19250	14540	10540	7160					
		Pe				20.94	19.36	17.68	15.93	14.13	12.30	10.47	8.65	6.89					
	50	Qo					38750	31650	25450	20100	15480	11510	8120						
		Pe					21.25	19.15	17.02	14.87	12.73	10.63	8.60						
4S301G	30	Qo	103800	95300	79900	66500	54900	44900	36250	28800	22450	17040	12480						
		Pe	19.21	19.07	18.57	17.81	16.84	15.70	14.41	13.02	11.57	10.09	8.61						
	40	Qo	89100	81800	68600	57000	47000	38250	30700	24200	18610	13860	9850						
		Pe	23.37	22.88	21.73	20.38	18.88	17.26	15.56	13.81	12.06	10.33	8.68						
	50	Qo	74300	68200	57100	47400	38900	31500	25100	19580	14840	10810	7410						
		Pe	27.01	26.20	24.46	22.58	20.60	18.56	16.50	14.45	12.45	10.54	8.76						
6S251D	30	Qo				87900	72500	59300	47800	38000	29700	22650	16740	11850					
		Pe				23.50	22.15	20.58	18.83	16.94	14.95	12.89	10.81	8.75					
	40	Qo				74700	61600	50200	40400	31900	24700	18590	13440	9130					
		Pe				27.20	25.18	23.00	20.68	18.28	15.82	13.36	10.92	8.54					
	50	Qo					50500	41150	33000	25950	19920	14760	10390						
		Pe					27.78	25.02	22.18	19.31	16.43	13.59	10.93						
6S351G	30	Qo	136000	124800	104500	86900	71600	58400	47000	37200	28800	21700	15720						
		Pe	25.11	24.84	24.07	23.04	21.77	20.29	28.64	16.83	14.91	12.89	10.81						
	40	Qo	116300	106600	89300	74100	60900	49450	39600	31100	23800	17670	12480						
		Pe	29.81	29.20	27.79	26.14	24.30	22.29	20.14	17.88	15.53	13.13	10.71						
	50	Qo	96600	88600	74100	61400	50400	40700	32400	25250	19160	14000	9670						
		Pe	34.17	33.23	31.19	28.96	26.56	24.04	21.41	18.71	15.96	13.20	10.45						
6S321D	30	Qo				98300	81200	66400	53600	42700	33350	25400	18760	13210					
		Pe				26.77	2.507	23.21	21.20	19.08	16.84	14.54	12.17	9.76					
	40	Qo				84000	69300	56600	45550	36050	27900	21000	15130	10210					
		Pe				30.86	28.50	26.00	23.38	20.68	17.90	15.07	12.21	9.34					
	50	Qo					57600	46900	37600	29550	22600	16720	11710						
		Pe					31.43	28.35	25.18	21.94	18.67	15.37	12.06						
6S401G	30	Qo	156100	143200	120000	99900	82500	67400	54300	43150	33600	25550	18730						
		Pe	30.46	29.91	28.66	27.20	25.57	23.77	21.82	19.75	17.56	15.28	12.93						
	40	Qo	133400	122400	102700	85400	70300	57300	46000	36300	28000	20900	14940						
		Pe	35.49	34.61	32.70	30.62	28.38	26.02	23.54	20.96	18.30	15.57	12.80						
	50	Qo	110800	101800	85400	70900	58300	47350	37800	29550	22500	16450	11330						
		Pe	40.19	38.97	36.42	33.73	30.91	27.99	24.99	21.92	18.79	15.63	12.46						

参数基于吸气温度20℃, 50Hz, 液体无过冷。Suction gas temperature 20℃, 50Hz, without liquid subcooling.
■ 附加冷却或限制吸气温度。Additional cooling or limited suction gas temperature.

制冷量表/Performance Data R22

型号 Model		冷凝温度 Condensing Temperature ℃	制冷量 Refrigerating Capacity Qo(W) 功率消耗 Power Consumption Pe(kW)																
			蒸发温度 Evaporating Temperature(℃)																
			↓	7.5	5	0	-5	-10	-15	-20	-25	-30	-35	-40	-45	-50	-55	-60	-65
6S401D	30	Qo Pe				118800 31.46	98100 29.74	80100 27.69	64700 25.37	51400 22.84	40100 20.14	30500 17.34	22400 14.49	15600 11.63					
	40	Qo Pe				100900 36.00	83100 33.43	67600 30.59	54300 27.55	42800 24.36	32950 21.06	24600 17.73	17570 14.40	11680 11.14					
	50	Qo Pe					68300 36.68	55300 33.08	44050 29.33	34300 25.49	26050 21.62	18990 17.76	13060 13.98						
6S501G	30	Qo Pe	184400 36.24	169300 35.76	142200 34.49	118600 32.87	98100 30.95	80400 28.79	65200 26.43	52100 23.94	40900 21.38	31400 18.79	23450 16.23						
	40	Qo Pe	157900 43.13	145000 42.10	121700 39.80	101300 37.22	83600 34.43	68300 31.47	55000 28.40	43600 25.28	33850 22.15	25600 19.09	18620 16.14						
	50	Qo Pe	131000 49.80	120200 48.21	100800 44.85	83800 41.30	68900 37.60	56000 33.83	44800 30.02	35150 26.24	26950 22.53	19960 18.97	14090 15.59						
2YD-2.2	30	Qo Pe				10110 2.72	8340 2.59	6810 2.43	5490 2.25	4360 2.05	3390 1.83	2570 1.59	1880 1.35	1300 1.09					
	40	Qo Pe				8490 3.15	6980 2.94	5670 2.7	4530 2.44	3560 2.17	2720 1.88	2020 1.58	1420 1.28	920 0.98					
	50	Qo Pe				6900 3.55	5640 3.25	4550 2.93	3600 2.59	2780 2.25	2080 1.9	1490 1.54	990 1.19						
2YG-3.2	30	Qo Pe	15940 2.79	14630 2.8	12260 2.77	10200 2.71	8420 2.6	6870 2.45	5540 2.28	4400 2.08	3420 1.86	2590 1.62	1890 1.37						
	40	Qo Pe	13510 3.49	12390 3.44	10380 3.32	8610 3.16	7080 2.96	5750 2.74	4600 2.49	3610 2.21	2760 1.92	2040 1.62	1430 1.31						
	50	Qo Pe	11110 4.11	10180 4.02	8500 3.8	7030 3.55	5740 3.27	4630 2.96	3660 2.63	2820 2.29	2110 1.93	1510 1.57	1000 1.2						
2YD-3.2	30	Qo Pe				12470 3.33	10290 3.15	8400 2.95	6780 2.72	5380 2.48	4190 2.21	3180 1.93	2330 1.64	1630 1.35					
	40	Qo Pe				10510 3.85	8650 3.58	7040 3.29	5640 2.98	4440 2.65	3420 2.32	2550 1.97	1810 1.62	1200 1.27					
	50	Qo Pe				8590 4.35	7050 3.98	5710 3.60	4550 3.21	3540 2.80	2690 2.39	1950 1.98	1340 1.57						
2YG-4.2	30	Qo Pe	19440 3.48	17840 3.48	14960 3.42	12450 3.32	10280 3.17	8400 2.98	6770 2.76	5380 2.50	4190 2.23	3170 1.94	2320 1.64						
	40	Qo Pe	16470 4.31	15110 4.25	12660 4.08	10520 3.86	8660 3.61	7050 3.33	5650 3.02	4450 2.69	3420 2.34	2540 1.98	1810 1.61						
	50	Qo Pe	13550 5.08	12430 4.96	10400 4.68	8620 4.36	7070 4.01	5720 3.63	4550 3.23	3540 2.82	2690 2.40	1960 1.98	1340 1.55						
4YD-3.2	30	Qo Pe				13720 3.85	11330 3.66	9260 3.44	7470 3.18	5940 2.90	4630 2.58	3510 2.24	2580 1.88	1800 1.50					
	40	Qo Pe				11560 4.42	9520 4.10	7740 3.76	6200 3.40	4880 3.03	3750 2.63	2790 2.23	1980 1.82	1310 1.40					
	50	Qo Pe				9450 4.91	7740 4.48	6260 4.04	4970 3.59	3860 3.13	2910 2.67	2110 2.22	1430 1.77						
4YG-5.2	30	Qo Pe	21550 3.78	19790 3.79	16590 3.76	13810 3.67	11400 3.52	9320 3.32	7520 3.07	5970 2.79	4650 2.48	3530 2.15	2580 1.81						
	40	Qo Pe	18240 4.65	16740 4.60	14020 4.46	11650 4.25	9580 3.99	7790 3.69	6240 3.35	4900 2.98	3760 2.59	2790 2.18	1970 1.76						
	50	Qo Pe	14970 5.44	13730 5.33	11470 5.07	9500 4.75	7780 4.39	6280 3.98	4980 3.55	3860 3.10	2900 2.62	2090 2.14	1410 1.65						
4YD-4.2	30	Qo Pe				17330 4.61	14290 4.39	11660 4.12	9400 3.81	7450 3.45	5800 3.06	4390 2.65	3210 2.22	2220 1.78					
	40	Qo Pe				14440 5.28	11870 4.93	9650 4.53	7720 4.10	6070 3.64	4650 3.15	3450 2.65	2440 2.14	1590 1.63					
	50	Qo Pe				11650 5.86	9550 5.39	7720 4.87	6130 4.33	4760 3.77	3590 3.19	2590 2.60	1750 2.02						
4YG-6.2	30	Qo Pe	27500 4.73	25200 4.75	21100 4.73	17580 4.62	14500 4.43	11830 4.17	9530 3.85	7550 3.48	5860 3.08	4420 2.65	3210 2.21						
	40	Qo Pe	23150 5.87	21250 5.81	17780 5.62	14750 5.35	12120 5.01	9840 4.61	7860 4.17	6160 3.68	4700 3.17	3470 2.65	2420 2.12						
	50	Qo Pe	18930 6.86	17360 6.72	14490 6.37	11980 5.95	9790 5.47	7890 4.95	6240 4.38	4820 3.79	3600 3.19	2570 2.58	1710 1.97						
4YD-5.2	30	Qo Pe				21100 5.52	17420 5.29	14220 4.99	11470 4.62	9100 4.18	7080 3.70	5370 3.19	3930 2.66	2730 2.11					
	40	Qo Pe				17650 6.34	14520 5.95	11810 5.50	9460 4.99	7440 4.43	5720 3.83	4250 3.22	3010 2.60	1980 1.98					
	50	Qo Pe				14300 7.07	11730 6.53	9490 5.93	7550 5.29	5880 4.62	4440 3.92	3220 3.22	2190 2.52						

制冷量表/Performance Data R404A/R507A

型号 Model		冷凝温度 Condensing Temperature ℃	制冷量 Refrigerating Capacity Qo(W) 功率消耗 Power Consumption Pe(kW)																
			蒸发温度 Evaporating Temperature(℃)																
			↓	7.5	5	0	-5	-10	-15	-20	-25	-30	-35	-40	-45	-50	-55	-60	-65
4YG-7.2	30	Qo Pe	32600 5.49	29900 5.52	25000 5.51	20800 5.39	17120 5.18	13950 4.88	11210 4.52	8860 4.10	6860 3.63	5160 3.12	3720 2.59						
	40	Qo Pe	27500 6.81	25200 6.75	21100 6.55	17490 6.26	14350 5.88	11630 5.43	9270 4.91	7250 4.35	5510 3.74	4040 3.11	2800 2.47						
	50	Qo Pe	22500 7.98	20600 7.83	17210 7.46	14230 7.00	11620 6.46	9350 5.86	7380 5.20	5690 4.50	4240 3.78	3010 3.03	1980 2.28						
4YD-6.2	30	Qo Pe				24950 6.65	20650 6.36	16900 5.98	13670 5.52	10900 5.01	8540 4.45	6530 3.86	4840 3.25	3420 2.63					
	40	Qo Pe				21100 7.64	17420 7.17	14200 6.63	11420 6.03	9030 5.37	6980 4.67	5240 3.94	3770 3.21	2540 2.47					
	50	Qo Pe				17320 8.61	14220 7.98	11520 7.28	9190 6.51	7180 5.71	5460 4.87	4000 4.01	2770 3.14						
4YG-9.2	30	Qo Pe	38800 6.85	35600 6.87	29900 6.82	24900 6.64	20600 6.36	16880 5.98	13660 5.53	10890 5.01	8530 4.45	6530 3.86	4840 3.25						
	40	Qo Pe	32850 8.35	30150 8.27	25300 8.01	21100 7.64	17410 7.18	14210 6.63	11440 6.02	9050 5.36	7000 4.66	5250 3.94	3770 3.21						
	50	Qo Pe	27050 9.80	24850 9.62	20900 9.16	17380 8.61	14310 7.98	11620 7.28	9280 6.52	7240 5.71	5480 4.87	3960 4.01	2660 3.14						
4YD-8.2	30	Qo Pe				33050 8.74	27250 8.17	22200 7.55	17890 6.87	14170 6.16	10990 5.41	8300 4.64	6040 3.86	4150 3.07					
	40	Qo Pe				27750 9.86	22800 9.05	18480 8.20	14760 7.34	11560 6.46	8830 5.57	6520 4.66	4580 3.74	2960 2.81					
	50	Qo Pe					18350 9.74	14790 8.71	11710 7.68	9070 6.65	6800 5.61	4880 4.55	3260 3.46						
4YG-12.2	30	Qo Pe	51500 8.63	47200 8.63	39450 8.49	32750 8.22	26900 7.81	21900 7.29	17550 6.68	13830 6.00	10650 5.26	7960 4.48	5700 3.68						
	40	Qo Pe	43500 10.66	39850 10.47	33300 9.99	27550 9.40	22600 8.72	18260 7.96	14530 7.15	11320 6.29	8590 5.40	6270 4.51	4320 3.62						
	50	Qo Pe	35400 12.28	32400 11.93	27050 11.17	22350 10.33	18230 9.42	14650 8.45	11550 7.45	8880 6.42	6590 5.39	4650 4.36	3020 3.36						
4YD-10.2	30	Qo Pe				38300 10.07	31600 9.37	25750 8.64	20700 7.87	16390 7.06	12690 6.22	9550 5.34	6910 4.43	4690 3.48					
	40	Qo Pe				32300 11.39	26500 10.45	21500 9.47	17130 8.45	13400 7.41	10220 6.35	7520 5.30	5240 4.25	3350 3.22					
	50	Qo Pe					21500 11.26	17290 10.04	13660 8.80	10550 7.53	7890 6.28	5640 5.05	3760 3.88						
4YG-15.2	30	Qo Pe	61500 10.23	56400 10.19	47100 9.96	39050 9.58	32100 9.06	26000 8.43	20800 7.70	16320 6.90	12490 6.04	9240 5.14	6500 4.23						
	40	Qo Pe	52200 12.41	47850 12.14	39950 11.51	33050 10.79	27050 9.99	21850 9.11	17360 8.18	13490 7.19	10190 6.17	7390 5.13	5020 4.07						
	50	Qo Pe	42600 14.27	39000 13.78	32500 12.78	26750 11.73	21800 10.66	17430 9.55	13680 8.43	10460 7.28	7710 6.11	5380 4.94	3420 3.75						
4YD-12.2	30	Qo Pe				44000 11.88	36250 11.15	29550 10.30	23750 9.35	18810 8.35	14580 7.30	11000 6.23	7980 5.19	5470 4.18					
	40	Qo Pe				37300 13.39	30600 12.33	24800 11.18	19810 9.97	15510 8.71	11840 7.44	8740 6.19	6120 4.99	3950 3.87					
	50	Qo Pe					24850 13.28	20000 11.83	15820 10.37	12210 8.91	9120 7.45	6510 6.01	4300 4.60						
4YG-20.2	30	Qo Pe	71000 12.24	65100 12.20	54500 11.94	45250 11.47	37200 10.82	30250 10.04	24250 9.14	19070 8.16	14640 7.12	10860 6.07	7660 5.02						
	40	Qo Pe	60500 14.78	55400 14.49	46250 13.79	38200 12.91	31250 11.91	25200 10.80	20000 9.62	15530 8.40	11730 7.16	8510 5.95	5820 4.78						
	50	Qo Pe	49900 16.78	45650 16.28	37900 15.18	31100 13.95	25250 12.63	20150 11.24	15760 9.81	12010 8.38	8840 6.97	6180 5.63	3980 4.37						
4YD-15.2	30	Qo Pe				58500 15.78	48400 14.84	39700 13.79	32200 12.63	25750 11.40	20250 10.10	15560 8.77	11630 7.43	8350 6.10					
	40	Qo Pe				49850 18.16	41150 16.80	33600 15.34	27100 13.82	21500 12.25	16730 10.65	12660 9.05	9240 7.47	6380 5.93					
	50	Qo Pe					33950 18.50	27600 16.67	22050 14.80	17330 12.91	13270 11.03	9820 9.17	6920 7.37						
4VG-25.2	30	Qo Pe	90700 16.14	83200 16.07	69700 15.72	57900 15.14	47750 14.36	38950 13.41	31350 12.32	24800 11.11	19210 9.81	14460 8.46	10460 7.08						
	40	Qo Pe	77400 19.56	71000 19.22	59500 18.37	49400 17.32	40650 16.11	33000 14.76	26450 13.31	20800 11.78	15930 10.20	11800 8.60	8320 7.00						
	50	Qo Pe	64500 22.78	59100 22.18	49500 20.84	41000 19.33	33600 17.71	27200 15.98	21600 14.18	16830 12.34	12740 10.49	9260 8.65	6340 6.86						

参数基于吸气温度20℃，50Hz，液体无过冷。Suction gas temperature 20℃, without liquid subcooling.
■ 附加冷却或限制吸气温度。Additional cooling or limited suction gas temperature.

制冷量表/Performance Data R404A/R507A

型号 Model		冷凝温度 Condensing Temperature ℃		制冷量 Refrigerating Capacity Qo(W) 功率消耗 Power Consumption Pe(kW)																	
				蒸发温度 Evaporating Temperature(℃)																	
				↓	7.5	5	0	-5	-10	-15	-20	-25	-30	-35	-40	-45	-50	-55	-60	-65	-70
4VD-20.2	30	Qo				67100	55500	45400	36750	29350	23000	17600	13060	9260							
		Pe				18.22	17.12	15.89	14.55	13.12	11.62	10.08	8.53	6.97							
	40	Qo				57200	47300	38700	31200	24800	19250	14540	10540	7160							
		Pe				20.94	19.36	17.68	15.93	14.13	12.30	10.47	8.65	6.89							
	50	Qo				38750	31650	25450	20100	15480	11510	8120									
		Pe				21.25	19.15	17.02	14.87	12.73	10.63	8.60									
4VG-30.2	30	Qo	103800	95300	79900	66500	54900	44900	36250	28800	22450	17040	12480								
		Pe	19.21	19.07	18.57	17.81	16.84	15.70	14.41	13.02	11.57	10.09	8.61								
	40	Qo	89100	81800	68600	57000	47000	38250	30700	24200	18610	13860	9850								
		Pe	23.37	22.88	21.73	20.38	18.88	17.26	15.56	13.81	12.06	10.33	8.68								
	50	Qo	74300	68200	57100	47400	38900	31500	25100	19580	14840	10810	7410								
		Pe	27.01	26.20	24.46	22.58	20.60	18.56	16.50	14.45	12.45	10.54	8.76								
6WD-25.2	30	Qo				87900	72500	59300	47800	38000	29700	22650	16740	11850							
		Pe				23.50	22.15	20.58	18.83	16.94	14.95	12.89	10.81	8.75							
	40	Qo				74700	61600	50200	40400	31900	24700	18590	13440	9130							
		Pe				27.20	25.18	23.00	20.68	18.28	15.82	13.36	10.92	8.54							
	50	Qo					50500	41150	33000	25950	19920	14760	10390								
		Pe					27.78	25.02	22.18	19.31	16.43	13.59	10.93								
6WG-35.2	30	Qo	136000	124800	104500	86900	71600	58400	47000	37200	28800	21700	15720								
		Pe	25.11	24.84	24.07	23.04	21.77	20.29	28.64	16.83	14.91	12.89	10.81								
	40	Qo	116300	106600	89300	74100	60900	49450	39600	31100	23800	17670	12480								
		Pe	29.81	29.20	27.79	26.14	24.30	22.29	20.14	17.88	15.53	13.13	10.71								
	50	Qo	96600	88600	74100	61400	50400	40700	32400	25250	19160	14000	9670								
		Pe	34.17	33.23	31.19	28.96	26.56	24.04	21.41	18.71	15.96	13.20	10.45								
6WD-30.2	30	Qo				98300	81200	66400	53600	42700	33350	25400	18760	13210							
		Pe				26.77	2.507	23.21	21.20	19.08	16.84	14.54	12.17	9.76							
	40	Qo				84000	69300	56600	45550	36050	27900	21000	15130	10210							
		Pe				30.86	28.50	26.00	23.38	20.68	17.90	15.07	12.21	9.34							
	50	Qo					57600	46900	37600	29550	22600	16720	11710								
		Pe					31.43	28.35	25.18	21.94	18.67	15.37	12.06								
6WG-40.2	30	Qo	156100	143200	120000	99900	82500	67400	54300	43150	33600	25550	18730								
		Pe	30.46	29.91	28.66	27.20	25.57	23.77	21.82	19.75	17.56	15.28	12.93								
	40	Qo	133400	122400	102700	85400	70300	57300	46000	36300	28000	20900	14940								
		Pe	35.49	34.61	32.70	30.62	28.38	26.02	23.54	20.96	18.30	15.57	12.80								
	50	Qo	110800	101800	85400	70900	58300	47350	37800	29550	22500	16450	11330								
		Pe	40.19	38.97	36.42	33.73	30.91	27.99	24.99	21.92	18.79	15.63	12.46								
6WD-40.2	30	Qo				118800	98100	80100	64700	51400	40100	30500	22400	15600							
		Pe				31.46	29.74	27.69	25.37	22.84	20.14	17.34	14.49	11.63							
	40	Qo				100900	83100	67600	54300	42800	32950	24600	17570	11680							
		Pe				36.00	33.43	30.59	27.55	24.36	21.06	17.73	14.40	11.14							
	50	Qo					68300	55300	44050	34300	26050	18990	13060								
		Pe					36.68	33.08	29.33	25.49	21.62	17.76	13.98								
6WG-50.2	30	Qo	184400	169300	142200	118600	98100	80400	65200	52100	40900	31400	23450								
		Pe	36.24	35.76	34.49	32.87	30.95	28.79	26.43	23.94	21.38	18.79	16.23								
	40	Qo	157900	145000	121700	101300	83600	68300	55000	43600	33850	25600	18620								
		Pe	43.13	42.10	39.80	37.22	34.43	31.47	28.40	25.28	22.15	19.09	16.14								
	50	Qo	131000	120200	100800	83800	68900	56000	44800	35150	26950	19960	14090								
		Pe	49.80	48.21	44.85	41.30	37.60	33.83	30.02	26.24	22.53	18.97	15.59								
6WDS-20.2	30	Qo								31900	27450	23300	19440	15910	12760	10020	7690	5770	4230		
		Pe									16.43	15.02	13.64	12.30	11.00	9.76	8.57	7.44	6.40	5.40	
	40	Qo									30600	26350	22350	18610	15230	12240	9640	7420	5540		
		Pe									18.53	16.90	15.32	13.79	12.33	10.92	9.57	8.29	7.07		
	50	Qo									29350	25200	21350	17810	14630	11800	9280				
		Pe									20.63	18.79	17.01	15.30	13.65	12.07	10.55				
6WDS-25.2	30	Qo									36200	31300	26600	22250	18220	14620	11480	8830	6630	4870	
		Pe										18.84	17.27	15.71	14.16	12.65	11.19	9.80	8.49	7.29	6.20
	40	Qo										34900	30100	25500	21300	17420	14000	11040	8500	6350	
		Pe										21.27	19.40	17.60	15.85	14.16	12.55	11.00	9.52	8.13	
	50	Qo										33450	28750	24350	20350	16720	13490	10620			
		Pe										23.71	21.58	19.35	17.56	15.67	13.85	12.10			
6WDS-30.2	30	Qo										43400	37400	31750	26500	21700	17420	13690	10540	7920	5800
		Pe											22.53	20.65	18.78	16.94	15.15	13.42	11.77	10.20	8.74
	40	Qo											41500	35700	30300	25300	20700	16680	13170	10150	7590
		Pe											25.20	23.10	21.01	18.96	16.95	15.00	13.14	11.37	9.72
	50	Qo												39500	34000	28850	24100	19870	16060	12650	
		Pe												28.07	25.69	23.33	21.01	18.75	16.57	14.49	



完美与卓越的追求者
质量与服务的践行者

The pursuer of perfection
and excellence
The practitioner of quality
and service



螺杆式制冷压缩机 Screw Compressor



型号标识 Nomenclature

COMPRESSOR / 压缩机 S L G 210-70 Y D 2

COMPRESSOR TYPE / 压缩机型号

S Semi-hermetic / 半封闭

SERIES / 系列

L Refrigeration / 冷冻

K Air condition / 空调

TYPE / 类型

G High temp / 高温机

D Low temp / 低温机

PLACEMENT-NOMINAL POWER / 排气量-名义功率

210-70 m³/h·Hp / 立方-马力

CAPACITY / 能量调节

Y Step control / 有级调节

W Stepless / 无级调节

STAGE / 压缩类型





D Single Stage / 单级压缩

S Double Stage / 双级压缩

VERSION / 版本

2 2 / 第2版

应用范围 Application Scope

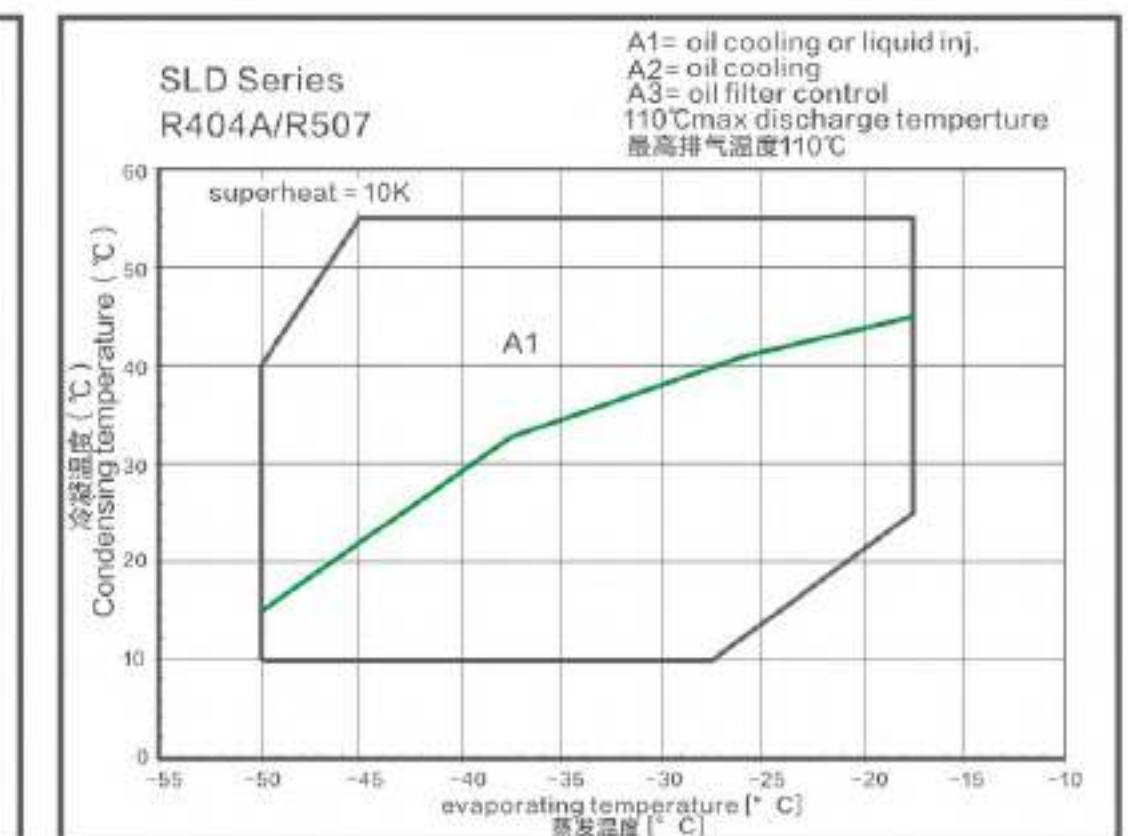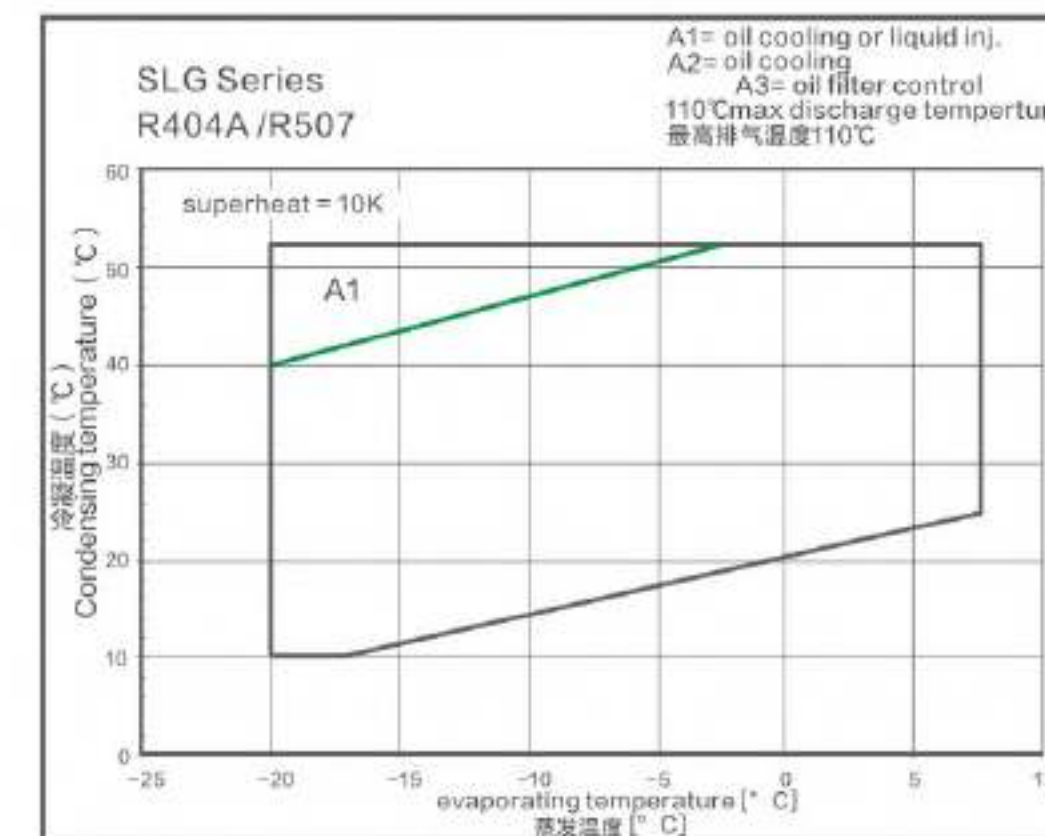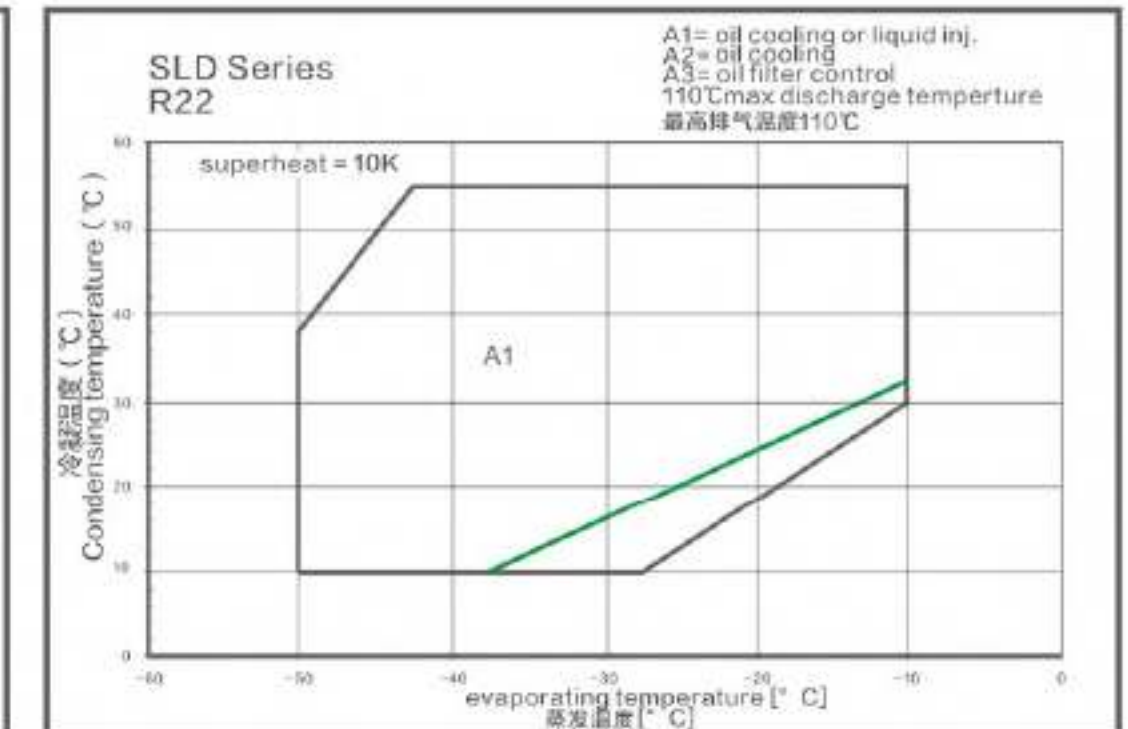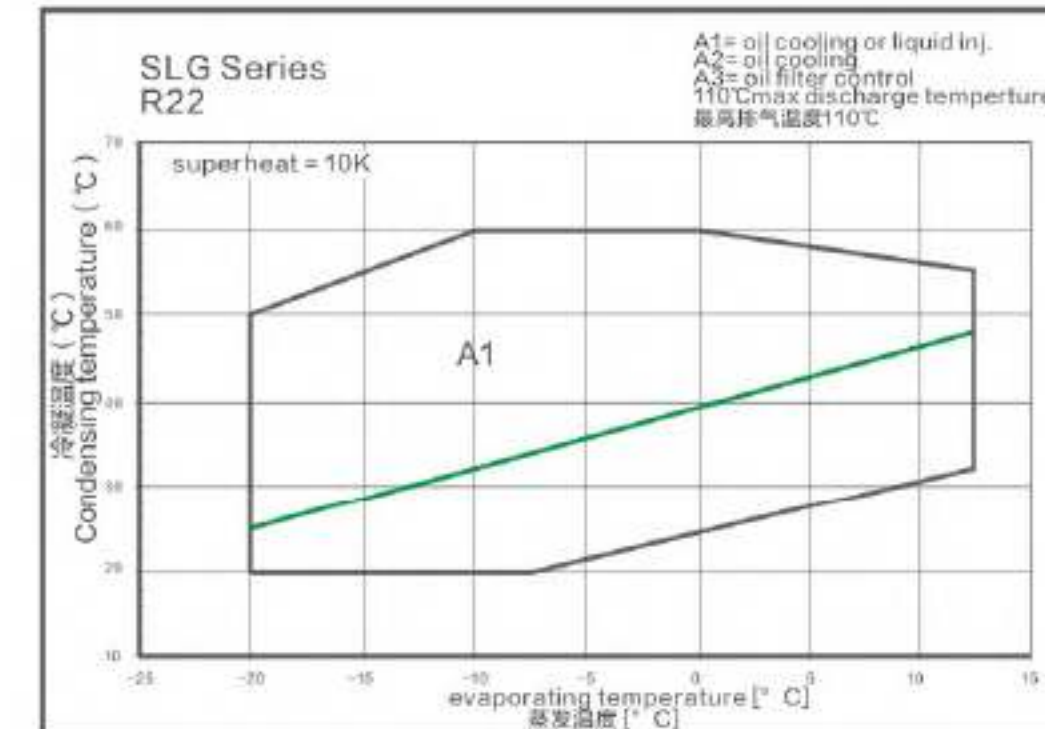

Key / 图例 :

Qo : cooling capacity(kW) / 冷量(kW)

Pa : input power(kW) / 输入电功率 (kW)

Te : Evaporating temperature (°C) / 蒸发温度 (°C)

Tc : Condensing temperature (°C) / 冷凝温度 (°C)

50Hz frequency / 50Hz 频率

Liquid subcooling 5K / 液体过冷度5K

Suction gas superheat 10K / 吸气过热度10K

技术数据 Technical Data

Model/型号	SLG	100-35	120-40	140-50	190-65	210-70	230-80	290-100	320-110	350-120	370-130	420-145	470-160	520-180	570-195	640-210
Displacement 50Hz 排气量50Hz	m³/h	102	128	145	188	205	235	293	322	354	368	416	469	520	572	641
Nominal Motor Power 电机名义功率	Hp/kW	40/30	40/30	50/37	70/52	70/52	80/60	100/75	115/83	120/89	130/98	145/108	160/120	180/135	195/146	210/157
Weight 重量	Kg	245	245	255	405	410	420	535	540	545	665	675	710	1030	1050	1050
Discharge line, internal Ø 排气管内径尺寸	mm	45	45	45	57	57	57	57	57	57	76	76	76	76	76	76
Suction line, internal Ø 吸气管内径尺寸	mm	57	57	57	76	76	76	89	89	89	89	89	89	108	108	108
Energy regulation 能量调节	50%,70%,100%有级调节或50%~100%无级调节 50%,70%,100% step regulation or 50%~100% stepless regulation															
Protection module 保护模块	INT 69 RCY															
Standard motor 标准电机	380V/3/50Hz~460/3/60Hz															
Starting current 星/三角启动电流	A	134	134	139	193	193	298	338	354	366	453	453	543	595	678	767
	A	134	134	182	139	193	338	318	318	354	374	453	543	595	595	595
Maximum working current 最大工作电流	A	56	60	78	104	109	126	158	175	187	206	228	253	284	308	331


技术数据 Technical Data

Model/型号	SLD	100-25	120-30	140-40	190-50	210-60	230-70	290-80	320-90	350-100	370-110	420-120	470-140	520-160	570-175	640-190
Displacement 50Hz 排气量50Hz	m³/h	102	128	145	188	205	235	293	322	354	368	416	469	520	572	641
Nominal Motor Power 电机名义功率	Hp/kW	30/22	30/22	40/30	60/45	60/45	70/53	80/60	90/68	100/75	110/83	120/89	140/105	160/120	175/131	200/143
Weight 重量	Kg	245	245	255	405	410	420	535	540	545	665	675	710	1030	1050	1050
Discharge line, internal Ø 排气管内径尺寸	mm	45	45	45	57	57	57	57	57	57	76	76	76	76	76	76
Suction line, internal Ø 吸气管内径尺寸	mm	57	57	57	76	76	76	89	89	89	89	89	89	108	108	108
Energy regulation 能量调节	50%,70%,100%有级调节或50%~100%无级调节 50%,70%,100% step regulation or 50%~100% stepless regulation															
Protection module 保护模块	INT 69 RCY															
Standard motor 标准电机	380V/3/50Hz~460/3/60Hz															
Starting current 星/三角启动电流	A	131	131	134	182	182	193	298	318	338	416	416	453	543	595	678
	A	131	131	134	182	182	193	298	318	338	416	416	453	543	595	678
Maximum working current 最大工作电流	A	42	46	63	90	95	112	126	144	157	175	187	221	251	275	301

技术数据 Technical Data


Model/型号	SLD-S	230S-50	420S-100	640S-150
Evaporation temperature 蒸发温度	℃	-60~-30(R22); -60~-30(R404A/R507)		
Rotate speed 转速	r/min	2960/3552		
Low pressure displacement 低压级排气量	m³/h	235/282	420/504	641/769
High pressure displacement 高压级排气量	m³/h	102/122	192/230	235/282
Low pressure casing size 低压级套管尺寸	mm	67	80	92
High pressure casing size 高压级套管尺寸	mm	42	54	67
Capacity adjustment range 容量调节范围	%	三段 (100, 50, 25) 3 segment		
Power supply 电源	V/Hz	3Ph/380 V/50 Hz		
Motor form 电机形式		三相，两极，半封闭异步电动机 3 phase, 2 pole, semi asynchronius motor		
Starting mode 启动方式		“Y-△” 启动或 “△” 直接启动 “Y-△” starting or “△” direct starting		
Protection devices 保护装置		电源欠相，逆相保护，绕组内埋温度保护 Protection from phase shortage and negative phase,thermostat inside the winding		
Strength test 强度试验Bar	g	42		
Rated power 额定功率	Hp/kW	60/45	125/94	175/131
Starting current/Y 起动电流 Y-LRA	A	137	276	374
Starting current/△ 起动电流 △-LRA	A	448	878	1155
Rated current 额定电流 RLA	A	85	170	237
Maximum working current 最大运转电流 RLAmax(A)	A	108	207	290
Wight 重量	kg	410	620	870

安装尺寸 Dimension

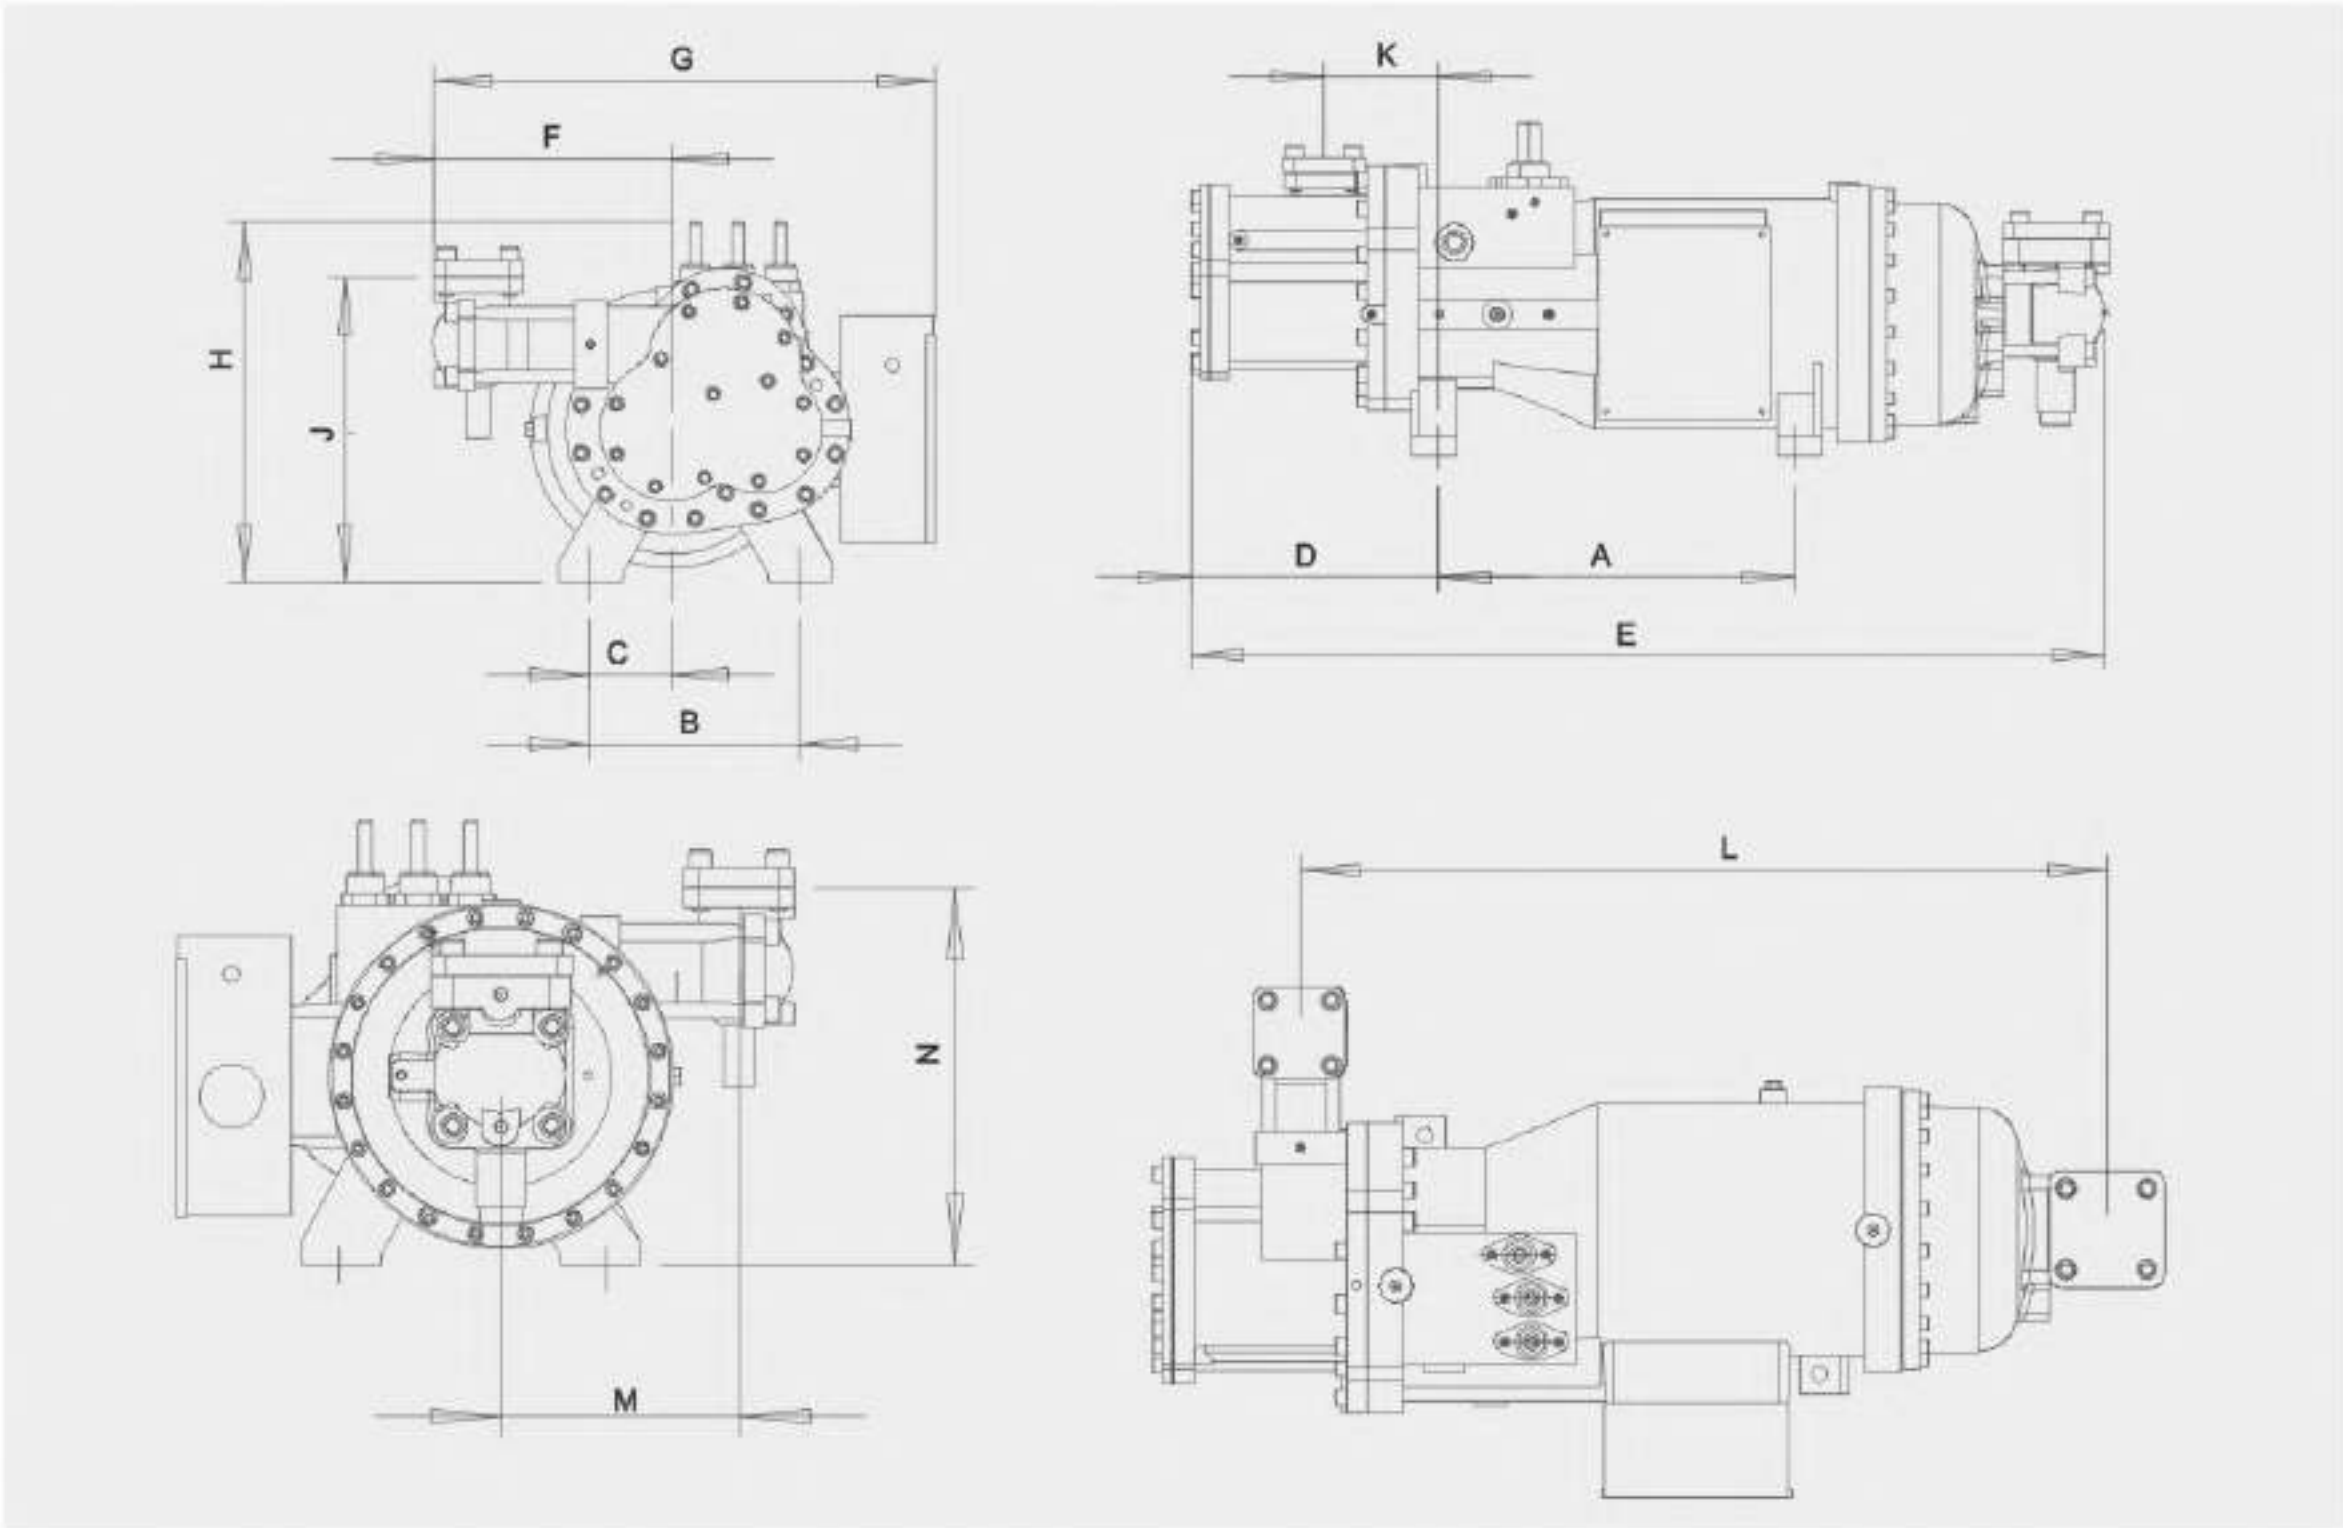

SLG	100-35	120-40	140-50	190-65	210-70	230-80	290-100	320-110	350-120	370-130	420-145	470-160	520-180	570-195	640-210
SLD	100-25	120-30	140-40	190-50	210-60	230-70	290-80	320-90	350-100	370-110	420-120	470-140	520-160	570-175	640-190
A	338			390			480			425			540		
B	232			290			290			360			340		
C	96			120			115			145			170		
D	276			309			327			326			417		
E	965			1125			1243			1281			1509		
F	255			285			316			352			377		
G	545			590			646			717			757		
H	410			475			450			495			535		
J	325			371			378			427			465		
K	134			165			150			158			181		
L	766			850			995			1025			1167		
M	208			216			247			286			296		
N	267			290			290			340			350		
供油管 Oil	16 / 5/8"						22 / 7/8"								
排气管 DLΦ	45 / 1-5/8"			57 / 2-1/8"						76 / 3-1/8"					
吸气管 SLΦ	57 / 2-1/8"			76 / 2-5/8"			89 / 3-1/8"			89 / 3-5/8"			108 / 4-1/8"		

安装尺寸 Dimension

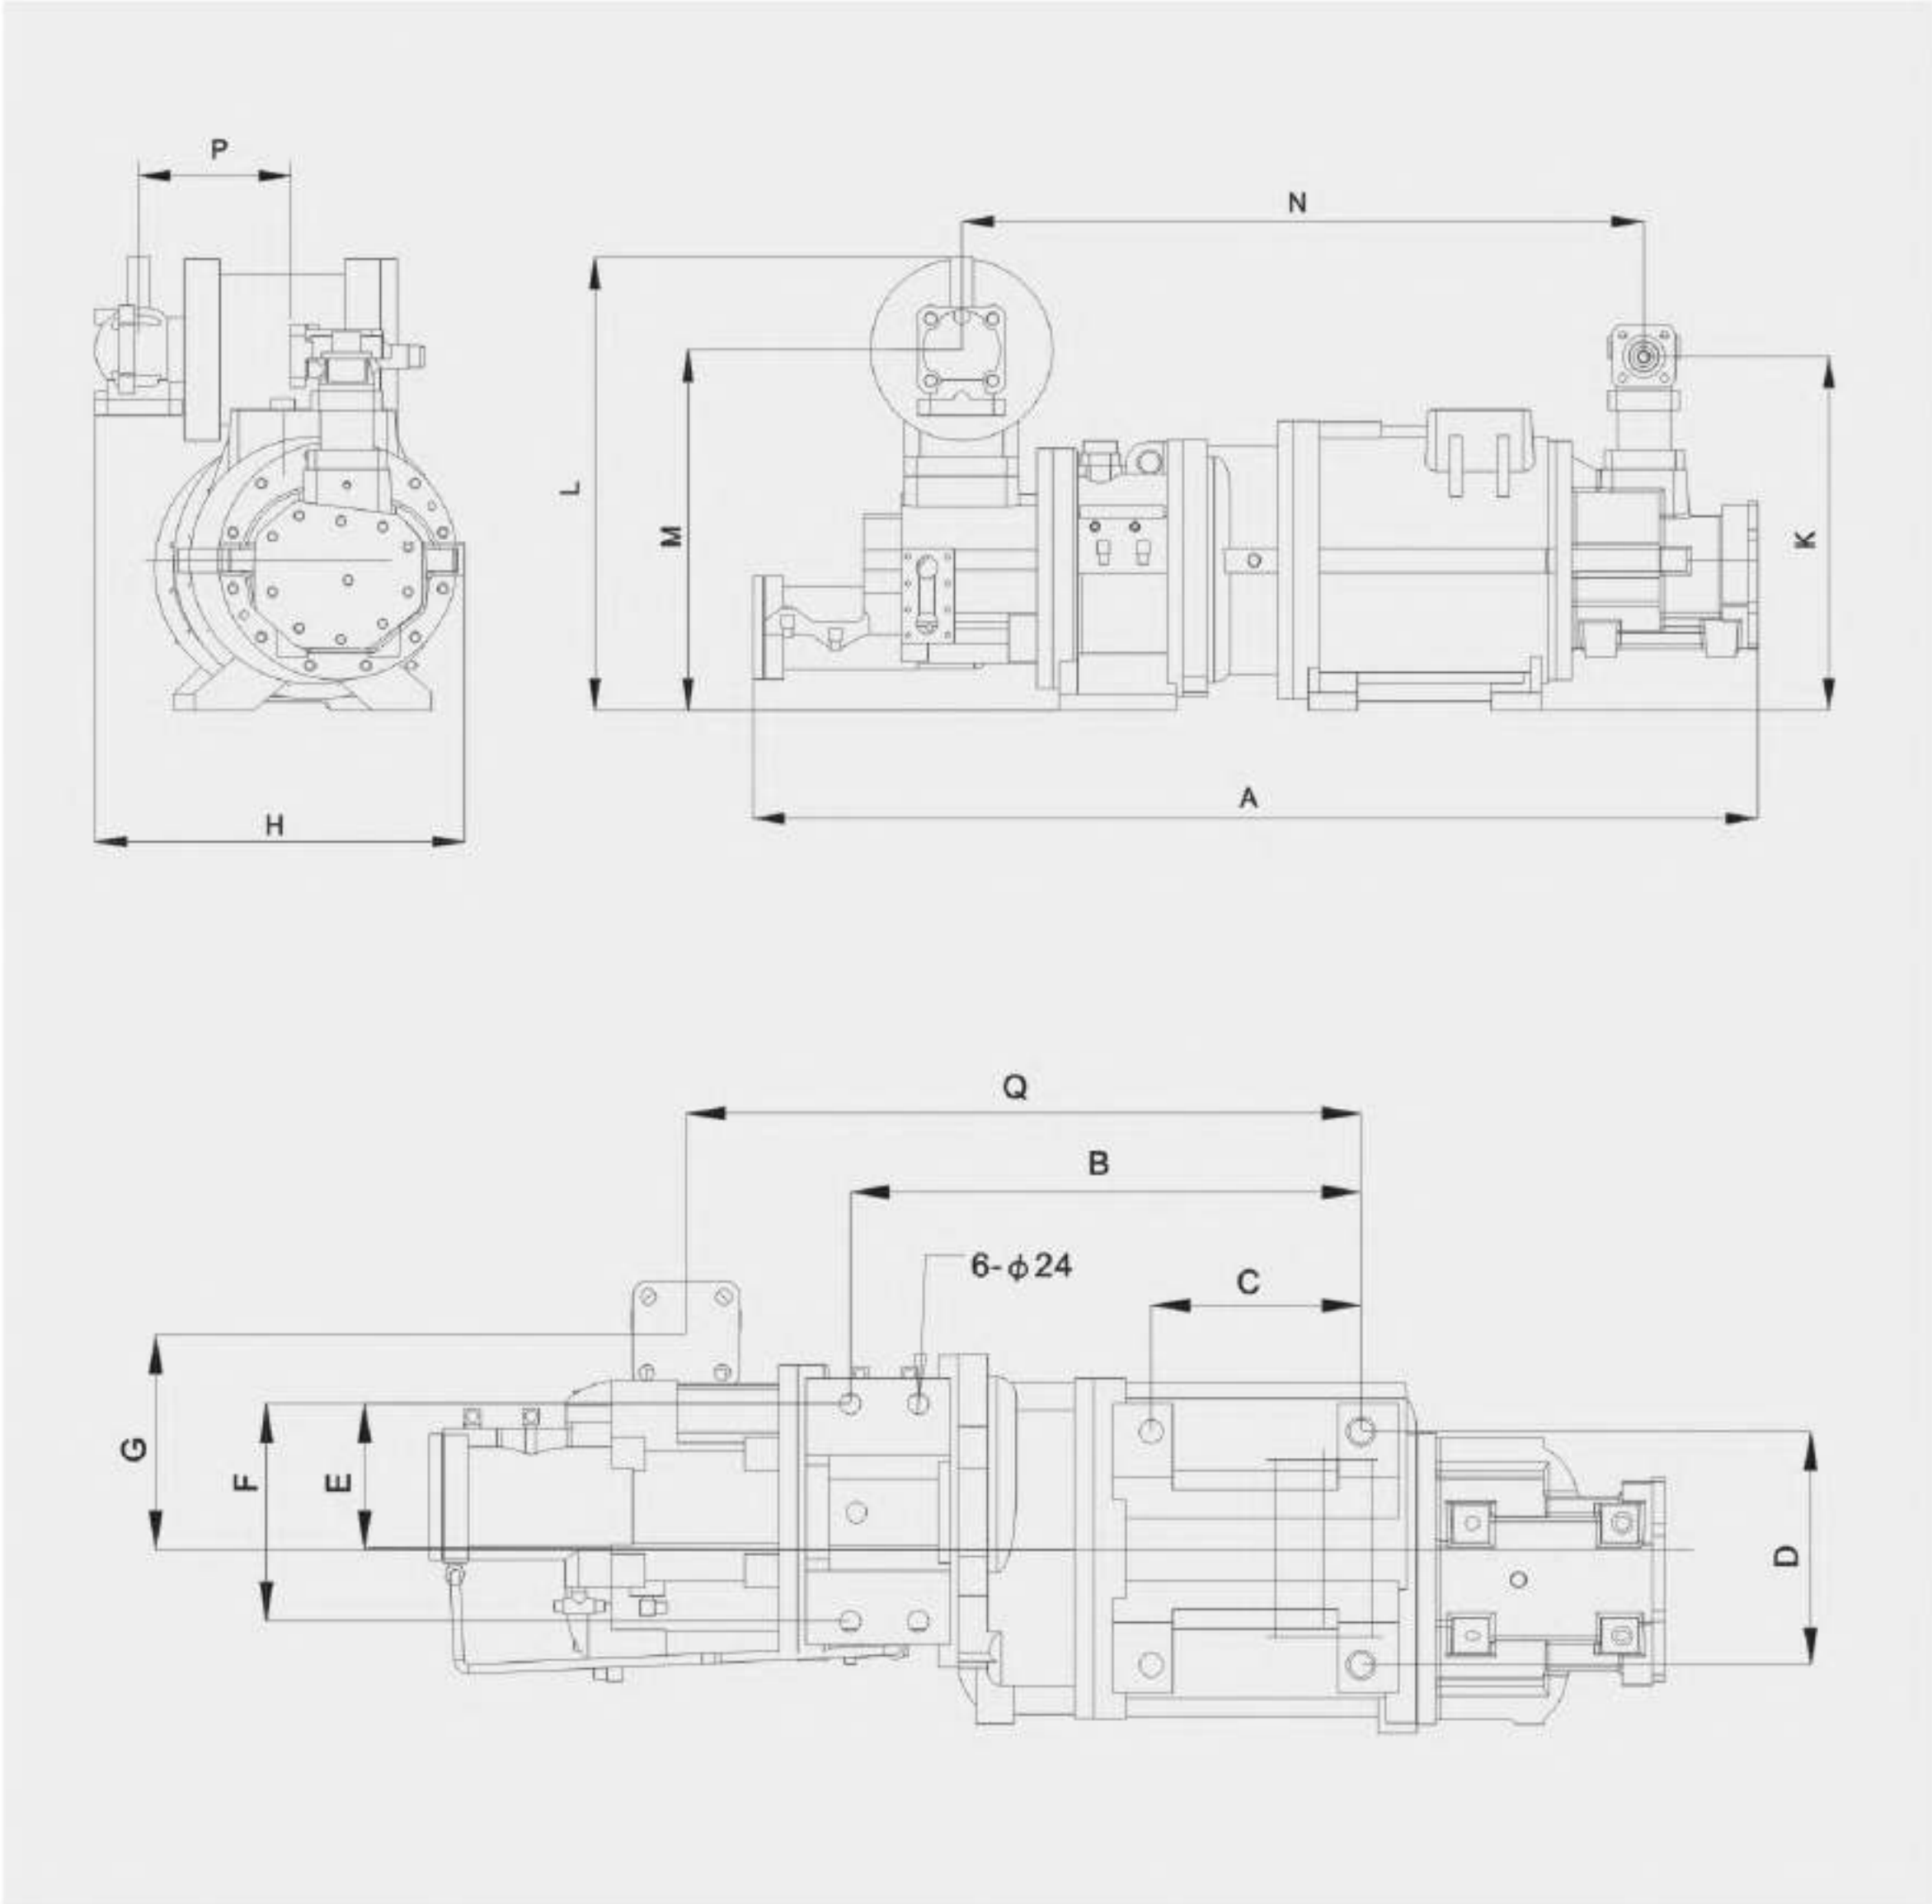

型号Model	A	B	C	D	E	F	G	H	K	L	M	N	P
SLD230S-50	1271	526	216	243	150	224	221	468	448	574	457	863	193
SLD420S-100	1520	637	250	290	198	290	239	530	567	745	618	1094	209

制冷量表/Performance Data R22

SLD 100-25 (R22)												
Tc	20		30		40		45		50		55	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	10.2	10.1	8.9	12.7	—	—	—	—	—	—	—	—
-40	18.3	10.6	16.4	12.8	13.6	14.5	11.7	15.6	9.9	17.0	8.9	17.8
-35	23.5	11.3	21.2	13.4	18.1	15.4	15.8	16.7	13.5	18.1	14.0	19.0
-30	29.7	12.0	27.0	14.1	23.2	16.2	21.4	17.5	18.1	18.9	18.4	20.0
-25	37.0	12.9	33.7	15.0	30.0	17.7	27.1	18.6	24.6	19.8	23.6	21.2
-20	45.6	14.0	41.7	15.9	37.3	18.8	34.3	19.4	30.6	20.6	29.8	22.0
-10	—	—	—	—	—	—	—	—	—	—	45.7	23.7

SLD 120-30 (R22)												
Tc	20		30		40		45		50		55	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	12.3	12.1	10.8	15.2	—	—	—	—	—	—	—	—
-40	22.0	12.8	19.8	15.4	16.4	17.4	14.0	18.8	12.0	20.5	10.7	21.4
-35	28.3	13.5	25.5	16.1	21.8	18.5	19.0	20.2	16.3	21.8	16.8	22.9
-30	35.8	14.4	32.5	17.0	27.9	19.5	25.8	21.0	21.7	22.8	22.1	24.1
-25	44.6	15.6	40.6	18.0	36.2	21.3	32.7	22.5	29.6	23.9	28.5	25.5
-20	54.9	16.9	50.2	19.2	44.9	22.6	41.4	23.4	36.8	24.7	35.9	26.5
-10	—	—	—	—	—	—	—	—	—	—	55.1	28.5

SLD 140-40 (R22)												
Tc	20		30		40		45		50		55	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	14.1	13.9	12.3	17.4	—	—	—	—	—	—	—	—
-40	25.2	14.6	22.6	17.6	18.8	20.0	16.1	21.5	13.7	23.4	12.2	24.5
-35	32.3	15.5	29.2	18.4	24.9	21.2	21.8	23.1	18.6	25.0	19.2	26.1
-30	40.9	16.5	37.1	19.4	32.0	22.4	29.5	24.1	24.9	26.1	25.3	27.5
-25	51.0	17.8	46.4	20.6	41.4	24.3	37.4	25.7	33.9	27.3	32.6	29.2
-20	62.8	19.3	57.4	21.9	51.3	25.9	47.3	26.8	42.1	28.3	41.1	30.4
-10	—	—	—	—	—	—	—	—	—	—	63.0	32.6

SLD 190-50 (R22)												
Tc	20		30		40		45		50		55	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	19.8	19.5	17.3	24.5	—	—	—	—	—	—	—	—
-40	35.4	20.6	31.8	24.7	26.4	28.1	22.6	30.3	19.3	32.9	17.2	34.5
-35	45.5	21.8	41.1	26.0	35.1	29.8	30.7	32.4	26.2	35.2	27.1	36.8
-30	57.6	23.2	52.3	27.3	45.0	31.5	41.5	33.9	35.0	36.7	35.6	38.8
-25	71.8	25.0	65.3	29.0	58.3	34.2	52.6	36.1	47.7	38.4	45.8	41.0
-20	88.3	27.2	80.8	30.9	72.3	36.4	66.6	37.7	59.2	39.9	57.8	42.7
-10	—	—	—	—	—	—	—	—	—	—	88.6	45.9

SLD 210-60 (R22)												
Tc	20		30		40		45		50		55	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	21.9	21.6	19.1	27.1	—	—	—	—	—	—	—	—
-40	39.2	22.8	35.2	27.3	29.2	31.0	25.0	33.5	21.3	36.4	19.0	38.1
-35	50.3	24.1	45.4	28.7	38.8	33.0	33.9	35.9	29.0	38.9	29.9	40.7
-30	63.7	25.6	57.8	30.2	49.7	34.8	45.9	37.4	38.7	40.6	39.3	42.8
-25	79.4	27.7	72.2	32.1	64.4	37.8	58.1	40.0	52.7	42.5	50.6	45.4
-20	97.6	30.1	89.3	34.1	79.9	40.3	73.6	41.6	65.5	44.0	63.9	47.2
-10	—	—	—	—	—	—	—	—	—	—	98.0	50.7

SLD 100-25 (R22) with ECO / 带经济器												
Tc	20		30		40		45		50		55	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	13.3	11.4	12.3	14.2	—	—	—	—	—	—	—	—
-40	22.4	11.5	21.4	14.6	19.1	16.6	17.0	19.5	15.1	21.9	14.2	23.9
-35	28.1	11.9	27.0	14.9	24.7	17.3	22.3	20.2	19.9	22.7	21.4	24.6
-30	34.6	12.4	33.3	15.3	30.7	17.9	29.3	20.6	25.7	23.1	27.3	25.1
-25	42.0	13.0	40.5	15.8	38.5	18.9	36.0	21.5	34.0	23.5	33.9	25.9
-20	50.3	13.7	48.7	16.5	46.5	20.0	44.3	21.8	41.0	23.8	41.5	26.3
-10	—	—	—	—	—	—	—	—	—	—	59.8	26.7

SLD 120-30 (R22) with ECO / 带经济器												
Tc	20		30		40		45		50		55	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	16.0	13.7	14.9	17.1	—	—	—	—	—	—	—	—
-40	27.0	13.8	25.8	17.6	23.0	20.0	20.4	23.5	18.2	26.4	17.0	28.7
-35	33.8	14.3	32.5	17.9	29.7	20.9	26.9	24.3	24.0	27.3	25.8	29.7
-30	41.7	14.9	40.1	18.4	37.0	21.5	35.3	24.8	31.0	27.8	32.9	30.2
-25	50.6	15.6	48.8	19.1	46.3	22.8	43.4	25.8	40.9	28.3	40.9	31.2
-20	60.6	16.5	58.7	19.8	55.9	24.0	53.4	26.2	49.3	28.6	50.0	31.6
-10	—	—	—	—	—	—	—	—	—	—	72.0	32.2

SLD 140-40 (R22) with ECO / 带经济器												
Tc	20		30		40		45		50		55	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	18.3	15.7	17.0	19.5	—	—	—	—	—	—	—	—
-40	30.9	15.8	29.5	20.1	26.3	22.9	23.4	26.9	20.8	30.2	19.5	32.9
-35	38.7	16.4	37.1	20.5	34.0	23.9	30.8	27.9	27.5	31.3	29.5	33.9
-30	47.7	17.0	45.9	21.1	42.3	24.6	40.4	28.4	35.4	31.8	37.6	34.6
-25	57.8	17.9	55.8	21.8	53.0	26.1	49.6	29.6	46.8	32.4	46.8	35.7
-20	69.4	18.9	67.1	22.7	64.0	27.5	61.1	30.0	56.4	32.7	57.2	36.2
-10	—	—	—	—	—	—	—	—	—	—	82.3	36.8

SLD 190-50 (R22) with ECO / 带经济器												
Tc	20		30		40		45		50		55	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	25.8	22.1	23.9	27.5	—	—	—	—	—	—	—	—
-40	43.5	22.3	41.6	28.3	37.0	32.3	32.9	37.8	29.3	42.5	27.4	46.3
-35	54.5	23.0	52.3	28.9	47.8	33.6	43.3	39.2	38.7	44.0	41.6	47.8
-30	67.1	24.0	64.6	29.7	59.5	34.6	56.9	39.9	49.8	44.8	52.9	48.7
-25	81.4	25.2	78.6	30.7	74.6	36.7	69.8	41.6	65.8	45.6	65.8	50.3
-20	97.6	26.6	94.5	32.0	90.1	38.7	85.9	42.2	79.4	46.1	80.5	51.0
-10	—	—	—	—	—	—	—	—	—	—	115.9	51.8

SLD 210-60 (R22) with ECO / 带经济器												
Tc	20		30		40		45		50		55	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	28.5	24.5	26.5	30.4	—	—	—	—	—	—	—	—
-40	48.0	24.6	45.9	31.2	40.9	35.7	36.4	41.8	32.4	46.9	30.3	51.2
-35	60.2	25.5	57.8	31.9	52.9	37.1	47.8	43.3	42.7	48.7	45.9	52.8
-30	74.1	26.5	71.3	32.8	65.8	38.3	62.9	44.1	55.1	49.5	58.5	53.8
-25	90.0	27.8	86.8	34.0	82.5	40.5	77.2	46.0	72.8	50.4	72.7	55.5
-20	107.9	29.4	104.4	35.3	99.5	42.8	95.0	46.7	87.8	50.9	88.9	56.3
-10	—	—	—	—	—	—	—	—	—	—	128.1	57.3

制冷量表/Performance Data R22

SLD 230-70 (R22)	
------------------	--

制冷量表/Performance Data R22

SLD 420-120(R22)												
Tc	20		30		40		45		50		55	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	42.5	41.8	37.1	52.6	—	—	—	—	—	—	—	—
-40	75.9	44.1	68.1	53.0	56.5	60.2	48.4	64.8	41.3	70.5	36.8	73.9
-35	97.4	46.7	88.0	55.6	75.2	63.9	65.6	69.5	56.2	75.3	58.0	78.8
-30	123.4	49.7	111.9	58.6	96.3	67.4	88.8	72.5	75.0	78.6	76.2	83.0
-25	153.7	53.6	139.9	62.2	124.7	73.3	112.6	77.4	102.1	82.3	98.1	87.9
-20	189.1	58.2	172.9	66.1	154.7	78.0	142.6	80.7	126.8	85.3	123.7	91.5
-10	—	—	—	—	—	—	—	—	—	—	189.8	98.3

SLD 470-140(R22)												
Tc	20		30		40		45		50		55	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	48.0	47.2	41.9	59.4	—	—	—	—	—	—	—	—
-40	85.7	49.8	76.9	59.8	63.9	68.0	54.7	73.2	46.6	79.7	41.6	83.5
-35	110.1	52.8	99.4	62.8	85.0	72.2	74.2	78.5	63.5	85.1	65.5	89.0
-30	139.4	56.1	126.5	66.2	108.8	76.1	100.4	81.9	84.7	88.8	86.1	93.8
-25	173.7	60.6	158.1	70.3	140.9	82.8	127.2	87.5	115.4	93.0	110.8	99.3
-20	213.7	65.8	195.4	74.7	174.8	88.2	161.1	91.1	143.3	96.4	139.8	103.4
-10	—	—	—	—	—	—	—	—	—	—	214.5	111.0

SLD 520-160(R22)												
Tc	20		30		40		45		50		55	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	53.1	52.3	46.4	65.7	—	—	—	—	—	—	—	—
-40	94.8	55.1	85.1	66.2	70.7	75.2	60.5	81.0	51.6	88.2	46.0	92.4
-35	121.8	58.4	110.0	69.5	94.0	79.9	82.0	86.8	70.2	94.1	72.5	98.5
-30	154.2	62.1	139.9	73.2	120.4	84.2	111.0	90.6	93.7	98.2	95.2	103.7
-25	192.2	67.0	174.9	77.7	155.9	91.7	140.8	96.8	127.6	102.9	122.6	109.9
-20	236.4	72.8	216.2	82.7	193.4	97.5	178.2	100.8	158.5	106.7	154.7	114.4
-10	—	—	—	—	—	—	—	—	—	—	237.2	122.8

SLD 570-175(R22)												
Tc	20		30		40		45		50		55	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	58.8	57.9	51.4	72.8	—	—	—	—	—	—	—	—
-40	105.0	61.0	94.3	73.3	78.3	83.3	67.0	89.8	57.1	97.7	51.0	102.3
-35	134.9	64.7	121.8	77.0	104.1	88.5	90.9	96.2	77.8	104.3	80.3	109.1
-30	170.9	68.8	155.0	81.1	133.3	93.3	123.0	100.4	103.8	108.8	105.5	114.9
-25	212.9	74.3	193.7	86.1	172.7	101.5	155.9	107.2	141.4	114.0	135.9	121.7
-20	261.9	80.6	239.5	91.6	214.3	108.1	197.4	111.7	175.6	118.2	171.3	126.7
-10	—	—	—	—	—	—	—	—	—	—	262.8	136.1

SLD 640-190(R22)												
Tc	20		30		40		45		50		55	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	66.6	65.6	58.2	82.4	—	—	—	—	—	—	—	—
-40	119.0	69.2	106.8	83.1	88.7	94.4	75.9	101.7	64.7	110.6	57.8	115.9
-35	152.8	73.3	138.0	87.2	117.9	100.2	102.9	109.0	88.1	118.1	91.0	123.6
-30	193.5	77.9	175.6	91.9	151.0	105.7	139.3	113.7	117.6	123.2	119.5	130.2
-25	241.1	84.1	219.5	97.5	195.7	115.0	176.6	121.4	160.2	129.1	153.9	137.9
-20	296.7	91.3	271.3	103.7	242.7	122.4	223.6	126.5	198.9	133.9	194.1	143.5
-10	—	—	—	—	—	—	—	—	—	—	297.7	154.1

Require additional cooling 此工况需要油冷却

SLD 420-120(R22) with ECO / 带经济器												
Tc	20		30		40		45		50		55	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	55.3	47.4	51.2	58.9	—	—	—	—	—	—	—	—
-40	93.0	47.7	89.0	60.5	79.2	69.1	70.4	80.9	62.8	90.9	58.8	99.1
-35	116.6	49.3	111.9	61.8	102.4	71.9	92.7	83.9	82.8	94.3	89.0	102.3
-30	143.6	51.3	138.2	63.5	127.5	74.1	121.8	85.5	106.7	95.9	113.3	104.3
-25	174.3	54.0	168.2	65.8	159.8	78.5	149.5	89.1	141.0	97.6	140.9	107.6
-20	209.0	56.9	202.3	68.4	192.8	82.9	184.0	90.4	170.1	98.7	172.3	109.1
-10	—	—	—	—	—	—	—	—	—	—	248.1	110.9

SLD 470-140(R22) with ECO / 带经济器												
Tc	20		30		40		45		50		55	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	62.5	53.5	57.9	66.5	—	—	—	—	—	—	—	—
-40	105.1	53.9	100.6	68.4	89.4	78.1	79.6	91.5	70.9	102.7	66.4	112.0
-35	131.8	55.8	126.5	69.9	115.7	81.2	104.7	94.8	93.6	106.5	100.6	115.6
-30	162.3	58.0	156.2	71.7	144.1	83.8	137.6	96.6	120.6	108.4	128.0	117.8
-25	196.9	61.0	190.1	74.3	180.6	88.7	168.9	100.7	159.3	110.3	159.2	121.6
-20	236.2	64.3	228.5	77.3	217.9	93.7	207.9	102.1	192.2	111.5	194.6	123.3
-10	—	—	—	—	—	—	—	—	—	—	280.4	125.4

SLD 520-160(R22) with ECO / 带经济器												
Tc	20		30		40		45		50		55	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	69.1	59.2	64.1	73.6	—	—	—	—	—	—	—	—
-40	116.3	59.6	111.2	75.7	98.9	86.4	88.1	101.2	78.4	113.7	73.5	123.9
-35	145.8	61.7	139.9	77.3	128.1	89.9	115.9	104.9	103.5	117.9	111.2	127.9
-30	179.5	64.2	172.8	79.4	159.4	92.7	152.3	106.9	133.4	119.9	141.6	130.4
-25	217.9	67.4	210.3	82.2	199.7	98.2	186.9	111.4	176.2	122.0	176.1	134.5
-20	261.3	71.1	252.8	85.5	241.0	103.6	230.0	113.0	212.6	123.3	215.3	136.4
-10	—	—	—	—	—	—	—	—	—	—	310.2	138.7

SLD 570-175(R22) with ECO / 带经济器												
Tc	20		30		40		45		50		55	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	76.6	65.6	71.0	81.5	—	—	—	—	—	—	—	—
-40	128.8	66.1	123.2	83.8	109.6	95.7	97.6	112.1	86.9	125.9	81.4	137.3
-35	161.5	68.3	155.0	85.6	141.9	99.6	128.4	116.2	114.7	130.6	123.2	141.7
-30	198.9	71.1	191.4	87.9	176.6	102.7	168.7	118.4	147.8	132.8	156.9	144.4
-25	241.4	74.7	233.0	91.1	221.3	108.8	207.0	123.4	195.2	135.2	195.1	149.0
-20	289.4	78.8	280.1	94.8	267.0	114.8	254.8	125.2	235.5	136.6	238.6	151.1
-10	—	—	—	—	—	—	—	—	—	—	343.6	153.6

SLD 640-190(R22) with ECO / 带经济器												
Tc	20		30		40		45		50		55	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	86.7	74.3	80.4	92.4	—	—	—	—	—	—	—	—
-40	146.0	74.8	139.6	95.0	124.2	108.4	110.5	127.0	98.4	142.6	92.2	155.5
-35	183.0	77.4	175.6	97.0	160.7	112.8	145.4	131.7	129.9	147.9	139.6	160.5
-30	225.3	80.5	216.8	99.6	200.0	116.3	191.1	134.1	167.4	150.5	177.7	163.6
-25	273.4	84.6	263.9	103.2	250.7	123.2	234.5	139.8	221.1	153.1	221.0	168.8
-20	327.9	89.3	317.3	107.3	302.5	130.0	288.6	141.8	266.8	154.8	270.2	171.2
-10	—	—	—	—	—	—	—	—	—	—	389.2	217.0

制冷量表/Performance Data R22

SLG 230-80(R22)												
Tc	30		35		40		45		50		60	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-20	99.8	40.9	94.2	45.1	87.8	50.8	80.5	51.5	72.5	57.2	—	—
-15	122.8	41.4	115.7	45.1	107.8	50.8	99.2	52.5	89.9	58.4	—	—
-10	149.3	41.6	140.9	45.6	131.7	51.0	122.0	53.8	111.7	59.6	89.7	73.2
-5	179.4	42.3	169.8	46.5	159.8	51.2	149.1	55.0	138.1	60.8	114.5	74.8
0	213.2	43.2	202.7	47.2	191.7	51.9	180.5	56.2	168.7	62.2	144.4	76.6
5	250.4	44.1	239.2	47.9	227.8	53.1	216.0	57.6	203.9	63.7	—	—
10	—	—	279.5	49.5	267.6	54.5	255.6	58.8	243.3	65.3	—	—

SLG 290-100(R22)												
Tc	30		35		40		45		50		60	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-20	125.3	51.3	118.2	56.6	110.2	63.7	101.1	64.7	91.0	71.8	—	—
-15	154.1	51.9	145.2	56.6	135.3	63.7	124.5	66.0	112.8	73.3	—	—
-10	187.4	52.2	176.9	57.2	165.4	64.0	153.2	67.5	140.3	74.8	112.6	91.8
-5	225.2	53.1	213.2	58.4	200.5	64.3	187.2	69.0	173.3	76.4	143.8	93.9
0	267.6	54.3	254.5	59.3	240.7	65.2	226.6	70.5	211.8	78.1	181.3	96.2
5	314.3	55.3	300.2	60.1	285.9	66.7	271.1	72.3	255.9	79.9	—	—
10	—	—	350.9	62.2	335.9	68.4	320.9	73.8	305.4	81.9	—	—

SLG 320-110(R22)												
Tc	30		35		40		45		50		60	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-20	138.4	56.7	130.6	62.6	121.8	70.4	111.7	71.5	100.6	79.3	—	—
-15	170.3	57.4	160.4	62.6	149.6	70.4	137.6	72.9	124.7	81.0	—	—
-10	207.1	57.7	195.4	63.2	182.7	70.7	169.3	74.6	155.0	82.7	124.4	101.5
-5	248.8	58.7	235.6	64.5	221.6	71.1	206.8	76.3	191.5	84.4	158.9	103.7
0	295.7	60.0	281.2	65.5	265.9	72.0	250.4	77.9	234.1	86.4	200.4	106.3
5	347.3	61.1	331.8	66.4	316.0	73.7	299.6	79.9	282.8	88.3	—	—
10	—	—	387.8	68.7	371.2	75.6	354.6	81.5	337.5	90.6	—	—

SLG 350-120(R22)												
Tc	30		35		40		45		50		60	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-20	152.8	62.6	144.3	69.1	134.5	77.8	123.4	78.9	111.1	87.6	—	—
-15	188.1	63.4	177.2	69.1	165.2	77.8	152.0	80.5	137.7	89.5	—	—
-10	228.7	63.7	215.8	69.8	201.8	78.1	186.9	82.4	171.2	91.3	137.4	112.1
-5	274.8	64.8	260.2	71.3	244.7	78.5	228.4	84.2	211.5	93.2	175.5	114.6
0	326.6	66.2	310.6	72.4	293.7	79.6	276.5	86.1	258.5	95.4	221.3	117.3
5	383.6	67.5	366.4	73.4	348.9	81.4	330.9	88.2	312.3	97.5	—	—
10	—	—	428.2	75.9	409.9	83.5	391.6	90.0	372.7	100.0	—	—

SLG 370-130(R22)												
Tc	30		35		40		45		50		60	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-20	159.2	65.3	150.3	72.0	140.1	81.0	128.5	82.2	115.7	91.3	—	—
-15	195.9	66.0	184.6	72.0	172.0	81.0	158.3	83.9	143.4	93.2	—	—
-10	238.2	66.4	224.8	72.8	210.2	81.4	194.7	85.8	178.3	95.1	143.1	116.7
-5	286.2	67.5	271.0	74.3	254.9	81.8	237.9	87.7	220.3	97.1	182.8	119.3
0	340.2	69.0	323.5	75.4	305.9	82.9	288.0	89.7	269.2	99.3	230.5	122.2
5	399.5	70.3	381.6	76.4	363.5	84.8	344.7	91.9	325.3	101.6	—	—
10	—	—	446.0	79.0	427.0	87.0	407.9	93.8	388.2	104.2	—	—

Require additional cooling 此工况需要油冷却

SLG 230-80 (R22) ECO / 带经济器												
Tc	30		35		40		45		50		60	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-20	115.1	43.9	112.2	49.1	108.4	55.9	103.3	59.0	96.9	65.3	—	—
-15	137.9	44.4	134.1	49.4	129.2	56.0	123.4	59.2	116.1	65.6	—	—
-10	163.2	44.9	158.7	49.4	153.4	56.2	147.2	59.5	139.6	65.8	122.2	80.4
-5	190.9	44.9	186.2	49.8	180.7	56.3	174.3	60.2	167.2	66.0	150.4	81.3
0	220.8	45.1	216.1	50.1	210.6	56.1	204.7	60.6	198.0	66.3	182.9	81.8
5	252.3	45.4	257.6	50.5	250.5	56.6	237.7	61.1	231.8	66.7	—	—
10	—	—	297.7	51.9	293.0	57.1	283.4	62.5	268.2	67.2	—	—

SLG 290-100(R22) ECO / 带经济器												
Tc	30		35		40		45		50		60	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-20	144.5	55.2	140.9	61.7	136.1	70.2	129.7	74.0	121.6	82.0	—	—
-15	173.2	55.8	168.4	62.0	162.2	70.4	154.8	74.3	145.8	82.3	—	—
-10	204.9	56.3	199.2	62.0	192.6	70.5	184.7	74.6	175.3	82.6	153.4	100.9
-5	239.6	56.3	233.8	62.5	226.9	70.7	218.8	75.5	209.9	82.9	188.8	102.1
0	277.2	56.6	271.3	62.8	264.3	70.4	257.0	76.1	248.5	83.2	229.6	102.7
5	316.8	56.9	323.3	63.4	314.5	71.1	298.4	76.7	291.0	83.8	—	—
10	—	—	373.8	65.2	367.9	71.7	355.8	78.5	336.7	84.4	—	—

SLG 320-110 (R22) ECO / 带经济器												
Tc	30		35		40		45		50		60	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-20	159.7	61.0	155.7	68.1	150.4	77.6	143.3	81.8	134.4	90.6	—	—
-15	191.4	61.6	186.1	68.5	179.2	77.8	171.1	82.2	161.1	91.0	—	—
-10	226.4	62.3	220.2	68.5	212.8	77.9	204.2	82.5	193.7	91.3	169.5	111.5
-5	264.8	62.3	258.4	69.1	250.7	78.1	241.8	83.5	231.9	91.6	208.6	112.8
0	306.3	62.6	299.8	69.4	292.1	77.8	284.0	84.1	274.7	91.9	253.8	113.4
5	350.1	62.9	357.3	70.1	347.5	78.6	329.8	84.8	321.6	92.6	—	—
10	—	—	413.0	72.0	406.5	79.2	393.2	86.7	372.1	93.2	—	—

SLG 350-120 (R22) ECO / 带经济器												
Tc	30		35		40		45		50		60	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-20	176.4	67.3	171.9	75.2	166.1	85.7	158.3	90.4	148.4	100.1	—	—
-15	211.3	68.0	205.5	75.6	197.9	85.9	189.0	90.7	177.9	100.4	—	—
-10	250.0	68.8	243.2	75.6	235.0	86.0	225.4	91.1	213.9	100.8	187.1	123.1
-5	292.4	68.8	285.3	76.3	276.9	86.2	267.1	92.2	256.1	101.2	230.4	124.6
0	338.3	69.1	331.1	76.7	322.6	85.9	313.6	92.9	303.3	101.5	280.2	125.3
5	386.6	69.5	394.6	77.4	383.8	86.8	364.2	93.6	355.1	102.2	—	—
10	—	—	456.1	79.6	448.9	87.5	434.2	95.8	410.9	103.0	—	—

SLG 370-130 (R22) ECO / 带经济器												
Tc	30		35		40		45		50		60	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-20	183.7	70.1	179.1	78.4	173.0	89.3	164.9	94.1	154.5	104.3	—	—
-15	220.1	70.9	214.0	78.8	206.1	89.4	196.8	94.5	185.3	104.6	—	—
-10	260.4	71.6	253.3	78.8	244.8	89.6	234.8	94.9	222.8	105.0	194.9	128.3
-5	304.6	71.6	297.2	79.5	288.8	89.8	278.2	96.0	266.8	105.4	240.0	129.8
0	352.4	72.0	344.9	79.9	336.0	89.5	326.7	96.8	315.8	105.8	291.9	130.5
5	402.7	72.4	411.0	80.6	399.8	90.4	379.4	97.5	369.9	106.5	—	—
10	—	—	475.1	82.9	467.6	91.1	452.3	99.8	428.0	107.3	—	—

制冷量表/Performance Data R22

型号Model	SLD230S-50									
Tc(°C)	25		30		35		40		45	
Te(°C)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)	P(kW)
-60	22.46	22.16	22.07	24.13	21.68	26.23	21.29	26.21	20.89	29.96
-55	29.31	21.96	28.86	24.69	28.41	26.67	27.95	28.21	27.48	32.61
-50	37.59	22.86	37.05	24.79	36.51	28.17	35.97	30.22	35.42	35.05
-45	47.49	23.96	46.85	26.13	46.19	28.84	45.58	32.41	44.93	37.67
-40	59.29	25.46	58.49	27.83	57.72	30.88	56.95	34.92	56.17	40.61
-35	73.14	27.46	72.17	30.02	71.23	33.41	70.29	37.88	69.36	44.09
-30	89.26	30.08	88.09	32.86	86.93	36.55	85.81	41.47	84.68	48.27

型号Model	SLD420S-100									
Tc(°C)	25		30		35		40		45	
Te(°C)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)	P(kW)
-60	41.21	41.98	41.44	45.75	40.71	50.24	39.97	55.63	39.20	65.80
-55	55.05	41.22	54.21	46.11	53.34	51.21	52.48	57.54	51.60	68.82
-50	70.58	42.91	69.56	46.55	68.56	52.67	67.54	59.74	66.49	71.91
-45	89.17	44.99	87.96	49.06	86.74	54.14	85.57	62.66	84.36	75.74
-40	111.32	47.80	109.81	52.25	108.38	57.99	106.93	66.50	105.47	80.44
-35	137.32	51.56	135.52	56.38	133.75	62.72	131.98	71.52	130.24	86.38
-30	167.59	56.51	165.40	61.69	163.23	68.61	161.11	77.93	158.99	93.78

型号Model	SLD640S-150									
Tc(°C)	25		30		35		40		45	
Te(°C)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)	P(kW)
-60	62.85	60.79	59.03	66.73	57.99	73.91	56.92	84.17	55.84	100.82
-55	82.03	60.18	77.20	66.40	75.98	74.25	74.76	85.58	73.50	103.27
-50	105.20	61.12	99.09	67.14	97.65	75.65	96.19	87.84	94.72	106.39
-45	132.90	64.09	125.29	69.87	123.55	78.27	121.97	91.42	120.16	111.00
-40	165.89	68.09	156.41	74.41	154.36	82.60	152.30	96.48	150.23	117.11
-35	204.63	73.43	193.02	80.30	190.50	89.34	187.98	103.35	185.50	125.15
-30	249.74	80.49	235.58	87.86	232.51	98.05	229.47	112.30	226.48	135.41

说明:
1. Tc= 冷凝温度, Te= 蒸发温度;
2. 吸气过热度: 5°C, 液体过冷度: 5°C;
3. Q= 名义工况制冷量, P= 名义工况功耗;

Remark:
1. Tc= Condensing Temp., Te = Evaporating Temp.;
2. Suction superheat: 5°C; liquid subcooling: 5°C;
3. Q = Cooling capacity, P = Power consumption;

Require additional cooling 此工况需要油冷却

制冷量表/Performance Data R22

型号Model	SLD230S-50 油冷负荷				
Tc(℃)	25	30	35	40	45
Te(℃)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)
-60	10.51	12.04	13.73	15.88	18.98
-55	8.75	10.53	12.63	15.33	18.96
-50	6.7	9.74	12.23	14.97	18.78
-45	4.49	6.77	11.64	14.43	18.64
-40	2.25	4.78	8.04	14.35	18.05
-35	0.5	2.89	6.53	14.18	17.8
-30	0	1.5	5.28	12.87	17.86

型 号Model	SLD420S-100 油冷负荷				
Tc(℃)	25	30	35	40	45
Te(℃)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)
-60	20.8	23.76	27.11	31.37	37.62
-55	17.3	20.79	24.93	30.27	37.43
-50	13.3	17.24	22.16	28.56	37.08
-45	8.9	13.36	19.04	26.52	36.42
-40	4.5	9.42	15.86	24.38	35.65
-35	0.5	5.69	12.89	22.46	35.1
-30	0	2.5	10.43	21.09	35.08

型号Model	SLD420S-150 油冷负荷				
Tc(℃)	25	30	35	40	45
Te(℃)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)
-60	29.75	33.85	38.7	45.2	53.9
-55	24.62	29.63	35.63	43.2	53.6
-50	18.84	24.56	31.62	40.85	52.85
-45	12.63	19.03	27.31	37.9	51.95
-40	6.34	13.42	22.6	34.8	50.88
-35	0.35	8.11	19.36	32.2	50.21
-30	0	3.51	14.86	30.2	49.98

说明:
1. Tc= 冷凝温度, Te= 蒸发温度;
2. 吸气过热度: 5°C, 液体过冷度: 5°C;
3. Q= 名义工况制冷量, P= 名义工况功耗;

Remark:
1. Tc= Condensing Temp., Te = Evaporating Temp.;
2. Suction superheat: 5°C; liquid subcooling: 5°C;
3. Q = Cooling capacity, P = Power consumption;

型号Model	SLD230-S 经济器负荷				
Tc(℃)	25	30	35	40	45
Te(℃)	Q(kW)	Q(kW)	Q(kW)	Q(kW)	Q(kW)
-60	5.8	6.2	6.5	6.9	7.4
-55	6.9	7.5	8.1	8.6	9.3
-50	8.3	8.9	9.7	10.4	11.2
-45	9.5	10.5	11.4	12.5	13.4
-40	10.9	12.2	13.3	14.5	15.8
-35	12.2	13.7	15.2	16.6	16.9
-30	13.4	15.2	16.9	18.7	20.6

型号Model	SLD420S-100 经济器负荷				
Tc(℃)	25	30	35	40	45
Te(℃)	Q(kW)	Q(kW)	Q(kW)	Q(kW)	Q(kW)
-60	11.2	12.1	12.9	13.8	14.5
-55	13.7	14.8	15.9	17.1	18.2
-50	16.2	17.6	19.2	20.6	22.1
-45	18.9	20.7	22.5	24.5	26.4
-40	21.6	23.9	26.2	28.6	30.9
-35	24.2	27.1	29.8	32.8	35.7
-30	26.6	30.1	33.4	36.9	40.7

型号Model	SLD420S-150 经济器负荷				
Tc(℃)	25	30	35	40	45
Te(℃)	Q(kW)	Q(kW)	Q(kW)	Q(kW)	Q(kW)
-60	15.9	17.1	18.2	19.5	20.6
-55	19.4	21	22.5	24.2	25.8
-50	23.1	24.1	27.2	29.2	31.4
-45	26.9	29.5	32	34.8	37.6
-40	30.8	33.9	37.3	40.7	44.2
-35	34.5	38.5	42.5	46.7	50.9
-30	37.9	42.8	47.6	52.8	58.2

制冷量表/Performance Data R404A

[illegible][illegible][illegible][illegible][illegible][illegible][illegible][illegible][illegible][illegible]

Require additional cooling 此工况需要油冷却

制冷量表/Performance Data R404A

[illegible][illegible][illegible][illegible][illegible]

Require additional cooling 此工况需要油冷却

SLD 230-70 (R404A) with ECO / 带经济器

[illegible]

SLD 290-80 (R404A) with ECO / 带经济器

[illegible]

SLD 320 - 90 (R404A) with ECO / 帶經濟器

[illegible]

SLD 350-100 (R404A) with ECO / 带经济器

[illegible]

SLD 370-110 (R404A) with ECO / 雪种/制冷剂

[illegible]

制冷量表/Performance Data R404A

SLD 420~120 (R404A)												
Tc	20		30		35		40		45		50	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	43.6	49.0	36.4	58.7	32.7	64.7	—	—	—	—	—	—
-40	78.6	53.5	68.1	63.6	62.3	69.9	56.2	76.9	50.0	84.3	42.9	92.7
-35	101.8	56.3	88.8	66.8	81.7	73.1	74.5	80.1	66.4	87.8	58.2	96.2
-30	130.0	60.1	113.7	70.3	105.2	76.6	96.3	83.6	86.8	91.6	76.6	100.4
-25	163.0	64.3	143.6	74.5	133.1	80.8	122.2	87.8	111.0	95.8	98.7	104.6
-20	202.5	69.6	179.0	79.4	166.4	85.7	153.5	93.0	139.9	101.1	125.6	109.8
-15	—	—	—	—	—	—	—	—	—	—	157.2	115.7

SLD 470~140 (R404A)												
Tc	20		30		35		40		45		50	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	48.8	54.8	40.8	65.7	36.6	72.4	—	—	—	—	—	—
-40	88.0	59.8	76.2	71.2	69.7	78.3	62.8	86.1	56.0	94.3	48.0	103.7
-35	113.9	63.0	99.4	74.7	91.4	81.8	83.4	89.6	74.3	98.2	65.1	107.6
-30	145.5	67.3	127.2	78.7	117.7	85.7	107.8	93.5	97.1	102.5	85.7	112.3
-25	182.4	72.0	160.7	83.3	148.9	90.4	136.7	98.2	124.2	107.2	110.5	117.0
-20	226.6	77.9	200.3	88.8	186.3	95.9	171.8	104.1	156.5	113.1	140.5	122.9
-15	—	—	—	—	—	—	—	—	—	—	176.0	129.5

SLD 520~160 (R404A)												
Tc	20		30		35		40		45		50	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	53.9	60.6	45.1	72.7	40.5	80.1	—	—	—	—	—	—
-40	97.3	66.2	84.3	78.8	77.1	86.6	69.5	95.2	61.9	104.3	53.1	114.7
-35	126.0	69.7	110.0	82.7	101.1	90.5	92.3	99.1	82.2	108.7	72.1	119.1
-30	161.0	74.5	140.7	87.0	130.2	94.8	119.3	103.5	107.5	113.4	94.8	124.3
-25	201.9	79.7	177.8	92.2	164.8	100.0	151.3	108.7	137.4	118.6	122.2	129.4
-20	250.7	86.2	221.7	98.3	206.1	106.1	190.1	115.2	173.2	125.1	155.5	135.9
-15	—	—	—	—	—	—	—	—	—	—	194.7	143.3

SLD 570~175 (R404A)												
Tc	20		30		35		40		45		50	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	59.1	66.4	49.4	79.7	44.3	87.8	—	—	—	—	—	—
-40	106.7	72.6	92.4	86.4	84.5	94.9	76.2	104.4	67.9	114.4	58.2	125.8
-35	138.1	76.4	120.6	90.6	110.9	99.2	101.2	108.7	90.1	119.1	79.0	130.5
-30	176.5	81.6	154.3	95.4	142.7	103.9	130.7	113.4	117.8	124.3	103.9	136.2
-25	221.3	87.3	194.9	101.1	180.6	109.6	165.8	119.1	150.6	130.0	134.0	141.9
-20	274.8	94.4	243.0	107.7	225.9	116.3	208.3	126.2	189.8	137.1	170.4	149.0
-15	—	—	—	—	—	—	—	—	—	—	213.4	157.1

SLD 640~190 (R404A)												
Tc	20		30		35		40		45		50	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	67.4	75.8	56.4	90.9	50.6	100.1	—	—	—	—	—	—
-40	121.7	82.8	105.4	98.5	96.4	108.2	86.9	119.1	77.4	130.4	66.4	143.4
-35	157.5	87.1	137.5	103.4	126.4	113.1	115.4	123.9	102.7	135.8	90.1	148.8
-30	201.2	93.1	175.9	108.8	162.8	118.5	149.1	129.3	134.3	141.8	118.5	155.3
-25	252.3	99.6	222.3	115.3	206.0	125.0	189.1	135.8	171.7	148.3	152.8	161.8
-20	313.4	107.7	277.1	122.8	257.6	132.6	237.6	144.0	216.5	156.4	194.4	169.9
-15	—	—	—	—	—	—	—	—	—	—	243.4	179.1

Require additional cooling 此工况需要油冷却

SLD 420~120 (R404A) with ECO / 带经济器												
Tc	20		30		35		40		45		50	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	62.3	59.1	57.5	75.9	54.5	86.4	—	—	—	—	—	—
-40	103.8	60.8	98.0	76.9	94.6	87.1	90.2	98.6	84.8	111.5	78.3	126.6
-35	129.7	62.2	123.2	78.3	118.8	88.1	113.7	99.7	107.6	112.6	100.4	127.3
-30	159.3	64.0	151.8	79.7	147.0	89.9	141.3	101.4	134.1	114.3	125.9	129.0
-25	193.0	66.8	184.5	82.2	179.0	92.0	172.2	103.2	164.4	116.4	154.9	131.1
-20	231.1	69.9	221.2	85.0	215.1	94.8	207.6	106.0	198.8	118.9	188.2	133.6
-15	—	—	—	—	—	—	—	—	—	—	226.3	136.7

SLD 470~140 (R404A) with ECO / 带经济器												
Tc	20		30		35		40		45		50	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	69.7	66.1	64.4	84.9	60.9	96.7	—	—	—	—	—	—
-40	116.2	68.1	108.7	86.1	105.9	97.4	100.9	110.3	94.8	124.8	87.6	141.7
-35	145.1	69.7	137.9	87.7	132.9	98.6	127.2	111.5	120.4	126.0	112.4	142.4
-30	178.3	71.6	169.9	89.2	164.5	100.6	158.1	113.5	150.1	128.0	140.9	144.4
-25	216.0	74.7	206.4	92.0	200.3	102.9	192.7	115.4	184.0	130.3	173.3	146.7
-20	258.6	78.3	247.6	95.1	240.7	106.0	232.3	118.6	222.4	133.0	210.6	149.5
-15	—	—	—	—	—	—	—	—	—	—	253.3	153.0

SLD 520~160 (R404A) with ECO / 带经济器												
Tc	20		30		35		40		45		50	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	77.1	73.2	71.2	93.9	67.4	106.9	—	—	—	—	—	—
-40	128.5	75.3	121.4	95.2	117.1	107.8	111.7	122.1	104.9	138.1	96.9	156.7
-35	160.6	77.1	152.5	97.0	147.1	109.1	140.7	123.4	133.2	139.4	124.3	157.6
-30	197.2	79.2	187.9	98.7	182.0	113.1	174.9	125.6	166.0	141.6	155.9	159.8
-25	238.9	82.7	228.4	101.7	221.7	113.9	213.2	127.7	203.5	144.2	191.7	162.4
-20	286.1	86.6	273.9	105.2	266.3	117.3	257.1	131.2	246.1	147.2	233.0	165.4
-15	—	—	—	—	—	—	—	—	—	—	280.2	169.3

SLD 570~175 (R404A) with ECO / 带经济器												
Tc	20		30		35		40		45		50	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	84.5	80.2	78.1	103.0	73.9	117.2	—	—	—	—	—	—
-40	140.9	82.6	133.0	104.4	128.4	118.2	122.4	133.8	115.0	151.4	106.2	171.8
-35	176.0	84.5	167.2	106.3	161.2	119.6	154.3	135.3	146.0	152.8	136.3	172.7
-30	216.2	86.8	206.0	108.2	199.5	122.0	191.7	137.6	182.0	155.2	170.9	175.1
-25	261.9	90.6	250.4	111.5	243.0	124.8	233.7	140.0	223.1	158.0	210.2	178.0
-20	313.6	94.9	300.2	115.3	291.9	128.6	281.8	143.8	269.8	161.4	255.4	181.3
-15	—	—	—	—	—	—	—	—	—	—	307.2	185.6

SLD 640~190 (R404A) with ECO / 带经济器												
Tc	20		30		35		40		45		50	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-50	96.4	91.5	89.0	117.4	84.3	133.7	—	—	—	—	—	—
-40	160.7	94.2	151.7	119.1	146.4	134.8	139.6	152.6	131.2	172.6	121.2	195.9
-35	200.7	96.3	190.7	121.2	183.8	136.4	175.9	154.2	166.5	174.3	155.4	197.0
-30	246.5	99.0	234.9	123.4	227.6	139.1	218.6	156.9	207.5	177.0	194.9	199.7
-25	298.7	103.4	285.5	127.2	277.1	142.3	266.5	159.6	254.4	180.2	239.7	202.9
-20	357.7	108.2	342.4	131.5	332.9	146.7	321.3	164.0	307.6	184.0	291.3	206.7
-15	—	—	—	—	—	—	—	—	—	—	350.3	211.6

制冷量表/Performance Data R404A

SLG 230~80(R404A)												
Tc	20		30		35		40		45		50	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-20	116.6	39.6	103.1	46.4	97.6	51.4	88.6	56.6	77.3	63.2	66.3	69.4
-15	145.8	40.5	126.8	46.8	122.8	52.5	109.5	57.5	95.3	65.0	84.9	70.7
-10	180.1	41.4	158.3	48.2	148.1	53.7	134.6	58.7	121.3	66.4	108.3	72.5
-5	214.5	42.3	191.3	49.8	178.5	55.0	164.2	60.3	148.8	67.5	131.8	73.9
0	—	—	229.7	51.6	216.6	56.4	199.6	61.4	181.8	68.7	168.4	75.5
5	—	—	276.1	53.4	254.1	57.5	238.2	63.2	219.5	69.4	196.9	76.6

SLG 290~100(R404A)												
Tc	20		30		35		40		45		50	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-20	147.0	49.9	130.0	58.5	123.1	64.8	111.8	71.4	97.4	79.7	83.6	87.5
-15	183.8	51.0	159.9	59.1	154.8	66.2	138.1	72.5	120.1	82.0	107.0	89.2
-10	227.1	52.2	199.6	60.8	186.8	67.7	169.7	74.0	153.0	83.7	136.5	91.5
-5	270.4	53.3	241.2	62.8	225.0	69.4	207.1	76.0	187.7	85.2	166.1	93.2
0	—	—	289.6	65.1	273.1	71.1	251.6	77.4	229.2	86.6	212.3	95.2
5	—	—	348.1	67.4	320.3	72.5	300.3	79.7	276.7	87.5	248.3	96.6

SLG 320~110 (R404A)												
Tc	20		30		35		40		45		50	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-20	162.2	55.1	143.4	64.5	135.9	71.5	123.3	78.8	107.5	88.0	92.3	96.5
-15	202.8	56.3	176.4	65.2	170.8	73.1	152.3	80.1	132.6	90.5	118.1	98.4
-10	250.6	57.6	220.3	67.1	206.1	74.7	187.3	81.6	168.8	92.4	150.6	100.9
-5	298.4	58.9	266.1	69.3	248.3	76.6	228.5	83.9	207.1	94.0	183.3	102.8
0	—	—	319.5	71.8	301.4	78.5	277.6	85.4	252.9	95.6	234.3	105.1
5	—	—	384.1	74.4	353.5	80.1	331.4	88.0	305.3	96.5	274.0	106.6

SLG 350~120 (R404A)												
Tc	20		30		35		40		45		50	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-20	177.4	60.2	156.9	70.6	148.6	78.2	134.9	86.2	117.6	96.2	100.9	105.6
-15	221.8	61.6	192.9	71.3	186.8	79.9	166.6	87.6	145.0	99.0	129.2	107.6
-10	274.1	63.0	240.9	73.4	225.4	81.7	204.9	89.3	184.7	101.1	164.7	110.4
-5	326.4	64.4	291.0	75.8	271.6	83.8	249.9	91.7	226.5	102.8	200.5	112.5
0	—	—	349.5	78.6	329.6	85.8	303.7	93.4	276.6	104.5	256.2	114.9
5	—	—	420.2	81.3	386.6	87.6	362.5	96.2	334.0	105.6	299.7	116.6

SLG 370~130(R404A)												
Tc	20		30		35		40		45		50	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-20	187.6	63.7	165.8	74.6	157.1	82.7	142.6	91.1	124.3	101.7	106.7	111.6
-15	234.5	65.1	204.0	75.4	197.5	84.5	176.1	92.6	153.3	104.6	136.6	113.8
-10	289.8	66.6	254.7	77.6	238.3	86.3	216.6	94.4	195.2	106.8	174.2	116.7
-5	345.0	68.0	307.7	80.1	287.1	88.5	264.2	97.0	239.4	108.7	212.0	118.9
0	—	—	369.4	83.0	348.5	90.7	321.0	98.8	292.4	110.5	270.9	121.5
5	—	—	444.2	86.0	408.7	92.6	383.2	101.7	353.0	111.6	316.8	123.3

SLG 230~80 (R404A) ECO / 带经济器												
Tc	20		30		35		40		45		50	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-20	143.2	42.3	139.7	51.6	134.4	57.8	126.7	65.0	116.0	71.6	112.8	82.3
-15	171.1	42.8	164.6	52.1	158.0	58.2	149.2	65.5	137.9	72.1	135.6	83.0
-10	202.2	43.4	192.7	52.8	185.2	58.4	175.2	66.0	163.3	72.3	159.7	83.2
-5	235.8	43.7	223.5	53.4	215.2	58.9	204.8	66.4	192.2	73.2	183.0	83.7
0	—	—	257.1	53.9	247.5	59.4	237.7	66.6	224.1	73.9	214.7	83.5
5	—	—	292.3	54.1	282.4	59.6	271.8	66.6	258.6	74.1	244.7	83.9

SLG 290~100 (R404A) ECO / 带经济器												
Tc	20		30		35		40		45		50	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-20	180.5	53.3	176.2	65.1	169.5	72.8	159.7	82.0	146.2	90.3	142.2	103.8
-15	215.7	53.9	207.6	65.7	199.3	73.4	188.1	82.6	173.9	90.9	170.9	104.7
-10	254.9	54.8	243.0	66.5	233.5	73.7	220.9	83.2	205.9	91.2	201.4	105.0
-5	297.3	55.1	281.8	67.4	271.3	74.3	258.2	83.7	242.3	92.3	230.7	105.5
0	—	—	324.2	68.0	312.1	74.8	299.7	84.0	282.6	93.2	270.7	105.2
5	—	—	368.5	68.2	356.0	75.1	342.6	84.0	326.1	93.5	308.5	105.8

SLG 320~110 (R404A) ECO / 带经济器												
Tc	20		30		35		40		45		50	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-20	199.2	58.9	194.4	71.8	187.0	80.4	176.3	90.5	161.4	99.7	157.0	114.5
-15	238.0	59.5	229.1	72.5	219.9	81.0	207.5	91.1	191.9	100.3	188.6	115.5
-10	281.3	60.4	268.1	73.4	257.6	81.3	243.8	91.8	227.2	100.6	222.2	115.8
-5	328.1	60.8	310.9	74.4	299.4	82.0	284.9	92.4	267.4	101.9	254.6	116.4
0	—	—	357.8	75.0	344.4	82.6	330.7	92.7	311.8	102.8	298.7	116.1
5	—	—	406.6	75.3	392.9	82.9	378.1	92.7	359.8	103.2	340.4	116.8

SLG 350~120 (R404A) ECO / 带经济器												
Tc	20		30		35		40		45		50	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-20	217.9	64.4	212.6	78.6	204.6	87.9	192.8	99.0	176.5	109.0	171.7	125.3
-15	260.3	65.1	250.5	79.3	240.5	88.6	227.0	99.7	209.9	109.7	206.3	126.3
-10	307.7	66.1	293.3	80.3	281.8	88.9	266.6	100.4	248.5	110.1	243.1	126.7
-5	358.8	66.4	340.1	81.3	327.5	89.6	311.6	101.1	292.4	111.4	278.4	127.4
0	—	—	391.3	82.0	376.7	90.3	361.7	101.4	341.1	112.5	326.8	127.0
5	—	—	444.7	82.4	429.7	90.7	413.5	101.4	393.6	112.8	372.3	127.7

SLG 370~130 (R404A) ECO / 带经济器												
Tc	20		30		35		40		45		50	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-20	230.3	68.0	224.8	83.0	216.2	92.9	203.8	104.6	186.6	115.2	181.5	132.4
-15	275.2	68.8	264.9	83.8	254.2	93.7	240.0	105.4	221.9	116.0	218.1	133.5
-10	325.3	69.9	310.0	84.9	297.9	94.0	281.9	106.1	262.7	116.3	257.0	133.9
-5	379.4	70.2	359.5	86.0	346.2	94.8	329.4	106.8	309.1	117.8	294.3	134.6
0	—	—	413.7	86.7	398.2	95.5	382.3	107.2	360.5	118.9	345.4	134.3
5	—	—	470.2	87.1	454.2	95.9	437.2	107.2	416.1	119.3	393.6	135.0

制冷量表/Performance Data R404A

SLG 420~145 (R404A)												
Tc	20		30		35		40		45		50	
Te	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa	Qo	Pa
-20	212.9	72.3	188.3	84.7	178.3	93.9	161.9	103.4	141.1	115.5	121.1	126.7
-15	266.2	73.9	231.5	85.6	224.2	95.9	199.9	105.1	174.0	118.8	155.0	129.2
-10	328.9	75.6	289.1	88.0	270.5	98.0	245.8	107.1	221.6	121.3	197.7	132.5
-5	391.7	77.2	349.3	90.9	325.9	100.5	299.9	110.1	271.8	123.3	240.6	135.0
0	—	—	419.4	94.3	395.6	103.0	364.4	112.1	331.9	125.4	307.5	137.9
5	—	—	504.2	97.6	463.9	105.1	434.9	115.5	400.8	126.7	359.6	140.0

制冷量表/Performance Data R404A

型号Model	SLD230S-50									
Tc(°C)	25		30		35		40		45	
Te(°C)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)	P(kW)
-65	19.70	22.30	19.25	23.30	18.84	24.25	18.39	25.27	17.91	26.68
-60	26.10	24.21	25.60	25.27	25.09	26.34	24.55	27.62	24.01	29.44
-55	33.90	26.34	33.28	27.50	32.66	28.81	32.04	30.49	31.36	32.77
-50	43.31	28.66	42.54	30.06	41.79	31.72	41.01	33.85	40.20	36.74
-45	54.53	31.27	53.59	32.96	52.66	35.00	51.72	37.70	50.72	41.30
-40	67.81	34.08	66.67	36.17	65.52	38.74	64.34	42.07	63.12	46.43
-35	83.43	37.18	81.97	39.71	80.52	42.88	79.05	46.91	77.56	52.13
-30	101.43	40.51	99.67	43.61	97.87	47.43	96.07	52.26	94.23	58.42

型号Model	SLD420S-100									
Tc(°C)	25		30		35		40		45	
Te(°C)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)	P(kW)
-65	36.99	41.86	19.25	23.30	18.84	24.25	18.39	25.27	17.91	26.68
-60	49.01	45.44	25.60	25.27	25.09	26.34	24.55	27.62	24.01	29.44
-55	63.64	49.46	33.28	27.50	32.66	28.81	32.04	30.49	31.36	32.77
-50	81.32	53.88	42.54	30.06	41.79	31.72	41.01	33.85	40.20	36.74
-45	102.39	58.70	53.59	32.96	52.66	35.00	51.72	37.70	50.72	41.30
-40	127.32	63.98	66.67	36.17	65.52	38.74	64.34	42.07	63.12	46.43
-35	156.64	69.82	81.97	39.71	80.52	42.88	79.05	46.91	77.56	52.13
-30	190.52	76.08	99.67	43.61	97.87	47.43	96.07	52.26	94.23	58.42

型号Model	SLD640S-150									
Tc(°C)	25		30		35		40		45	
Te(°C)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)	P(kW)
-65	55.12	59.63	51.50	62.32	50.39	64.85	49.18	67.60	47.91	71.36
-60	73.03	64.73	68.47	67.57	67.13	70.45	65.67	73.86	64.21	78.72
-55	94.84	70.44	89.00	73.57	87.35	77.04	85.69	81.55	83.86	87.63
-50	121.18	76.74	113.76	80.41	111.78	84.82	109.71	90.51	107.52	98.39
-45	152.57	83.61	143.33	88.12	140.86	93.62	138.31	100.83	135.67	110.44
-40	189.74	91.14	178.33	96.74	175.22	103.61	172.06	112.49	168.81	124.17
-35	233.44	99.44	219.21	106.23	215.25	114.67	211.41	125.50	207.41	139.43
-30	283.91	108.36	266.55	116.64	261.74	126.86	256.91	139.77	251.99	156.23

说明:
1. Tc= 冷凝温度, Te= 蒸发温度;
2. 吸气过热度: 5℃, 液体过冷度: 5℃;
3. Q= 名义工况制冷量, P= 名义工况功耗;

Remark:
1.Tc = Condensing Temp., Te = Evaporating Temp.;
2.Suction superheat: 5℃; liquid subcooling: 5℃;
3.Q = Cooling capacity, P = Power consumption;

制冷量表/Performance Data R404A

型号Model	SLD230S-50				
Tc(°C)	25	30	35	40	45
Te(°C)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)
-65	4.7	5.5	6	7	8.5
-60	1.8	2.5	3.5	4.5	6
-55			0.5	2.5	4
-50					1.5
-45					
-40					
-35					
-30					

型号Model	SLD420S-100				
Tc(°C)	25	30	35	40	45
Te(°C)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)
-65	8.5	10.5	11.8	13.6	16.5
-60	3	5	6.5	8.5	11.8
-55			1.5	3.5	7.5
-50					3.5
-45					
-40					
-35					
-30					

型号Model	SLD420S-150				
Tc(°C)	25	30	35	40	45
Te(°C)	Q(kW)	P(kW)	Q(kW)	P(kW)	Q(kW)
-65	12	14.5	16.5	18.95	22.6
-60	4.5	6.5	8.8	11.8	16.5
-55			1.5	4.5	10.2
-50					3.9
-45					
-40					
-35					
-30					

说明:
1. Tc= 冷凝温度, Te= 蒸发温度;
2. 吸气过热度: 5℃, 液体过冷度: 5℃;
3. Q= 名义工况制冷量, P= 名义工况功耗;

Remark:
1.Tc = Condensing Temp., Te = Evaporating Temp.;
2.Suction superheat: 5℃; liquid subcooling: 5℃;
3.Q = Cooling capacity, P = Power consumption;