
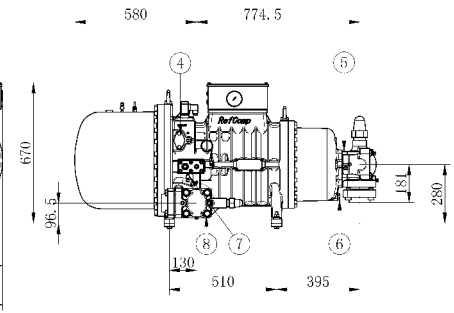



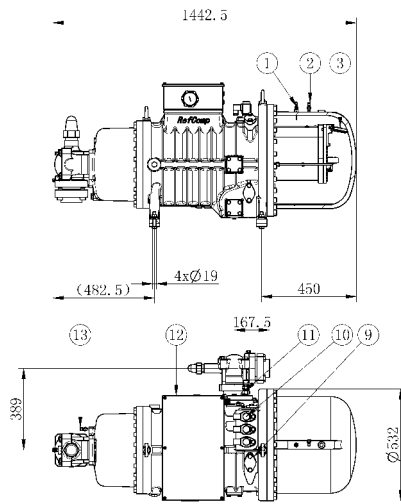

图例:

- 1-排温传感器1/8"NPT
- 2-高压接头1/4"SAE-FLARE
- 3-止逆阀组
- 4-电磁阀接口(无级能量调节)
- 5-吸气截止阀 Ø92 (3-5/8")
- 6-低压侧放油口
- 7-油压接头1/4"SAE-FLARE
- 8-排气截止阀 Ø80(3-1/8")
- 9-喷液接口Ø10 (可选)
- 经济器接口Ø28 (可选)
- 经济器配管需配Ø42
- 变径连接
- 10 能量调节电磁阀
- 11-油连接板接口 5/8"SAE-FLARE
- 12 接线盒
- 13-低压接头1/4"SAE-FLARE

- 1-Oil temperature sensor 1/8"NPT
- 2-High pressure connection 1/4"SAE-FLARE
- 3-Check valve
- 4-Solenoid valve connection (1/2")
- 5-Suction shut-off valve Ø92 (3-5/8")
- 6-Oil drain port on low pressure
- 7-Oil pressure connection 1/4"SAE-FLARE
- 8-Discharge shut-off valve Ø80(3-1/8")
- 9-Liquid injection connection Ø10 (option)
- Economizer connection Ø28 (option)
- Economizer piping needs to be fitted with Ø42
- Diameter-varying connections
- 10 Solenoid valves for part load operation
- 11-OIL INLET CONNECTION 5/8"SAE-FLARE
- 12 Terminal box
- 13-Low pressure connection 1/4"SAE-FLARE